

NSK Linear Guide™

NH Series, NS Series

Based on the LH and LS series characterized by reliability and performance, we have attained a significant increase in durability. Inheriting the random-matching capability and the use of the “NSK K1™” lubrication unit, these series are the new linear guides, easy to use for any kind of machine.



Patent pending



With NSK's cumulated state-of-the-art technology, the standard linear guides have been reborn as these new series.

Based on the LH and LS series characterized by reliability and performance, we have attained a significant increase in durability. Inheriting the random-matching capability and the use of the “NSK K1™” lubrication unit, they are the new linear guides, easy to use for any kind of machine.

Features of NH and NS Series

1. Excellent durability

Super-long life, twice as long as compared with that of conventional series
As compared with the conventional LH and LS Series, a load rating 1.3 times greater and a lifespan two times longer have been accomplished*1. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.
*1: Based on the representative values of each series.


Maintenance-free
Installing NSK K1™ lubrication unit (optional), which has an overwhelming track record in a wide range of application fields, assures a long-term, maintenance-free operation. Not only cost saving in maintenance but also environmental protection can be practiced.

What is “NSK K1™” lubrication unit?
NSK K1 is a lubrication device which combines oil and resin in a single unit. The porous resin contains a large amount of lubrication oil. Touching its surface to the raceway of a rail close to the ball contact point NSK K1 constantly supplies fresh oil which seeps from the resin.

2. Easy-to-use “Standard Linear Guides”

The random-matching (interchangeable) type is available
The rails and ball slides can be selected in any combinations. The random-matching is available in all the models. The free combination of different ball slide types, accuracy grades and preload can be made. Also, we can accommodate to short-term delivery as well.

Robust design to absorb mounting errors
Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity(Fig. 1). This increases the capacity to absorb errors in installation, and will demand less work to achieve precision in mounting the linear guide.



Abundant options
Abundant options are available, including an NSK K1™ lubrication unit, double seal, protector, surface treatment, etc. We offer the configuration best suited to the customer's needs.

All mounting dimensions are the same as those for the LH and LS Series
Regarding the mounting dimensions (mounting parts' dimensions), such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NH Series remain the same as those of the conventional LH series, while the mounting dimensions of the NS Series remain the same as those of the conventional LS Series. So, the new NH/NS Series linear guides can be used without making any design changes.


NH Series
Larger ball diameter
Larger load rating capacity

NS Series
Compact, low-profile shape

By mounting a NSK K1™ lubrication unit (optional), a long-term, maintenance-free operation can be achieved.


New standard linear guides produced through state-of-the-art technology

Based on the LH/LS Series, which have achieved exceptional results in numerous application areas ever since their debut in 1989, the new NH/NS Series are created as the focal point of NSK's cumulated state-of-the-art design and manufacturing technologies.

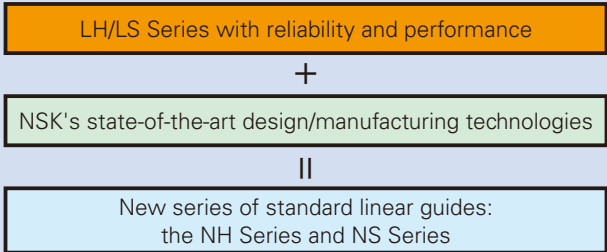


Ball groove geometry contributing to long life

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased. As compared with the LH/LS Series, the load rating capacity of the new series has increased to 1.3 times, while the life span has increased to twice*1.

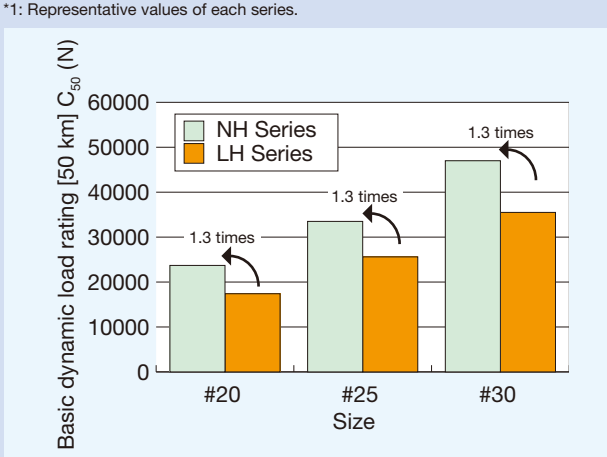

Ball circulating groove with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and a reduced noise level. So, these new series are suited for high-speed applications compared with the LH/LS Series.

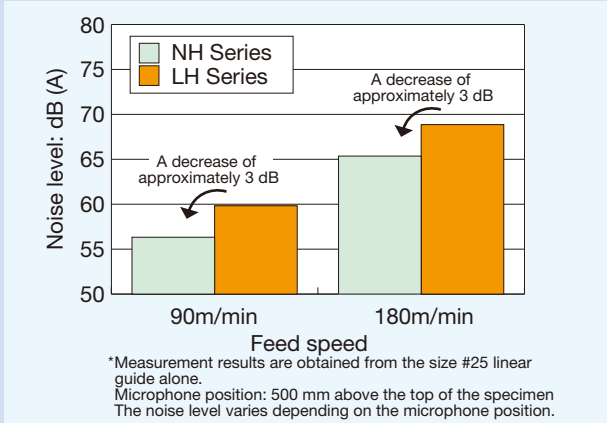

Specifications

1. Ball Slide Shape

- Two types of ball slides are available: One is of the square type with tapped holes, and the other is of the mounting flange type.
- Regarding the square type, a compact, low-profile model is also available.
- On the mounting holes of the flange type, the tapped part is used to fix the ball slide from the top surface, while the minor diameter can be used as a bolt hole for mounting from the bottom. This enables mounting from either direction, top or bottom.
- The ball slide length is available in three lengths: standard high-load, long super-high load or short medium-load. The ball slide length you can use differs, depending on the type. Please refer to the dimension table.

Fig. 2 Ball slide shape

Ball slide shape	Shape/installation method	Type (Upper row: Rating; Lower row: Ball slide length)		
		High-load type	Super-high-load type	Medium-load type
		Standard	Long	Short
AN BN		AN 	BN 	
AL BL CL		AL 	BL 	CL
EM GM JM		EM 	GM 	JM

2. Maximum Rail Length

- Table 1 shows the limitations of rail length (maximum length).
- Depending on the required accuracy grade, the available maximum rail length might be shorter than the one shown in Table 1.

Table 1 Length limitations of rails

Series	Material	Size	15	20	25	30	35	45	55	65
NH	Special high carbon steel		2 980	3 960	3 960	4 000	4 000	3 990	3 960	3 900
	Stainless steel		1 800	3 500	3 500	3 500				
NS	Special high carbon steel		2 920	3 960	3 960	4 000	4 000			
	Stainless steel		1 700	3 500	3 500	3 500	3 500			

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

3. Accuracy

- The setting of the accuracy grade differs depending on whether the required type is of the preloaded assembly or the random-matching type.
- For the preloaded assembly, different accuracy grades are available: Ultra precision P3, Super precision P4, High precision P5, Precision P6, and Normal PN grades.
- While the random-matching type has High precision PH and Normal PC grade.

Table 2 Tolerance of preloaded assembly

Characteristics	Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H Variation of H (All ball slides on a set of rails)		±10 3	±10 5	±20 7	±40 15	±80 25
Mounting width W ₂ or W ₃ Variation of W ₂ or W ₃ (All ball slides on reference rail)		±15 3	±15 7	±25 10	±50 20	±100 30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to Fig. 3 and Table 4.					

Table 3 Tolerance of random-matching type


Characteristics	Accuracy grade	High precision grade PH		Normal grade PC	
Model No.		NH15,20,25,30,35 NS15,20,25,30,35	NH45,55,65	NH15,20,25,30,35 NS15,20,25,30,35	NH45,55,65
Mounting height H		±20	±30	±20	±30
Variation of mounting height H		15	20	15	20
Mounting width W ₂ or W ₃		±30	±35	±30	±35
Variation of mounting width W ₂ or W ₃		20	20	25	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Refer to Fig. 3 and Table 4.				

Note: Variation in the random-matching products means the variation among the values taken at the same position on the same rail.

Table 4 Running parallelism of ball slide

Rail length (mm)	Preload assembly					Random-matching type	
	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	High precision PH	Normal grade PC
Over ~ 50 or less	2	2	2	4.5	6	2	6
50 ~ 80	2	2	3	5	6	3	6
80 ~ 125	2	2	3.5	5.5	6.5	3.5	6.5
125 ~ 200	2	2	4	6	7	4	7
200 ~ 250	2	2.5	5	7	8	5	8
250 ~ 315	2	2.5	5	8	9	5	9
315 ~ 400	2	3	6	9	11	6	11
400 ~ 500	2	3	6	10	12	6	12
500 ~ 630	2	3.5	7	12	14	7	14
630 ~ 800	2	4.5	8	14	16	8	16
800 ~ 1 000	2.5	5	9	16	18	9	18
1 000 ~ 1 250	3	6	10	17	20	10	20
1 250 ~ 1 600	4	7	11	19	23	11	23
1 600 ~ 2 000	4.5	8	13	21	26	13	26
2 000 ~ 2 500	5	10	15	22	29	15	29
2 500 ~ 3 150	6	11	17	25	32	17	32
3 150 ~ 4 000	9	16	23	30	34	23	34

Fig. 3 Specifications of accuracy

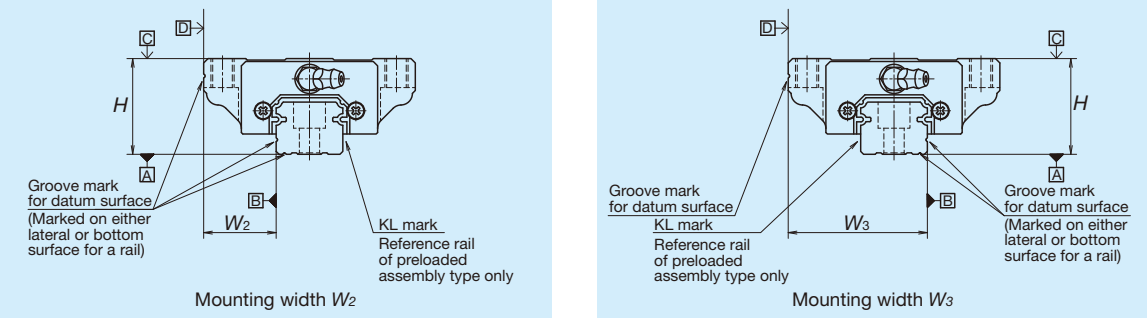

4. Preload and Rigidity

- Preload setting differs between the preloaded assembly and random-matching types.
- For the preloaded assembly, Medium preload Z3, Slight preload Z1 and Fine clearance Z0 are available.
- For the random-matching type, Medium preload ZH, Slight preload ZZ and Fine clearance ZT are available.
- Possible combinations between the accuracy and preload grades are shown in Table 9.

Table 5 Preload and rigidity of preloaded assembly
(1) NH Series

Model No.	Preload (N)		Rigidity (N/μm)			
			Vertical direction		Lateral direction	
	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
NH15 AN, EM	78	490	137	226	98	186
NH20 AN, EM	147	835	186	335	137	245
NH25 AL, AN, EM	196	1 270	206	380	147	284
NH30 AL, AN	245	1 570	216	400	157	294
NH30 EM	294	1 770	265	480	186	355
NH35 AL, AN, EM	390	2 350	305	560	216	390
NH45 AL, AN, EM	635	3 900	400	745	284	540
NH55 AL, AN, EM	980	5 900	490	910	345	645
NH65 AN, EM	1 470	8 900	580	1 070	400	755
NH15 BN, GM	98	685	196	345	137	284
NH20 BN, GM	196	1 080	265	480	196	355
NH25 BL, BN, GM	245	1 570	294	560	216	400
NH30 BL, BN, GM	390	2 260	360	665	265	480
NH35 BL, BN, GM	490	2 940	430	795	305	570
NH45 BL, BN, GM	785	4 800	520	960	370	695
NH55 BL, BN, GM	1 180	7 050	635	1 170	440	835
NH65 BN, GM	1 860	11 300	805	1 480	550	1 040

Note: Clearance for Fine clearance Z0 is 0 to 3 μm, Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15 μm.

Table 7 Preload and rigidity of preloaded assembly
(2) NS Series

Model No.	Preload (N)		Rigidity (N/μm)			
			Vertical direction		Lateral direction	
	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
NS15 AL, EM	69	390	127	226	88	167
NS20 AL, EM	88	540	147	284	108	206
NS25 AL, EM	147	880	206	370	147	275
NS30 AL, EM	245	1 370	255	460	186	345
NS35 AL, EM	345	1 960	305	550	216	400
NS15 CL, JM	49	294	78	147	59	108
NS20 CL, JM	69	390	108	186	78	137
NS25 CL, JM	98	635	127	235	88	177
NS30 CL, JM	147	980	147	275	108	206
NS35 CL, JM	245	1 370	186	335	137	245

Note: Clearance for Fine clearance Z0 is 0 to 3 μm, Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15 μm.

Table 9 Combinations of accuracy and preload

		Accuracy grade						
		Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
Without NSK K1 lubrication unit		P3	P4	P5	P6	PN	PH	PC
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KH	KC
With NSK K1 for food and medical equipment		F3	F4	F5	F6	FN	FH	FC
Preload	Fine clearance Z0	○	○	○	○	○	—	—
	Slight preload Z1	○	○	○	○	○	—	—
	Medium preload Z3	○	○	○	○	—	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○	○
	Random-matching type with medium preload ZH	—	—	—	—	—	○	○

Table 6 Clearance and preload of random-matching type
(1) NH Series

Model No.	Fine clearance ZT	Slight preload ZZ	Medium preload ZH
NH15	−4 ~ 15	−4 ~ 0	−3 ~ −7
NH20	−5 ~ 15	−5 ~ 0	−3 ~ −8
NH25		−5 ~ 0	−4 ~ −9
NH30		−7 ~ 0	−5 ~ −12
NH35		−7 ~ 0	−5 ~ −12
NH45		−7 ~ 0	−7 ~ −14
NH55		−9 ~ 0	−9 ~ −18
NH65		−9 ~ 0	−10 ~ −19

Note: Minus sign denotes a value is an amount of preload (elastic deformation of balls).

Table 8 Clearance and preload of random-matching type
(2) NS Series

Model No.	Fine clearance ZT	Slight preload ZZ	Medium preload ZH
NS15	−4 ~ 15	−4 ~ 0	−3 ~ −7
NS20	−4 ~ 15	−4 ~ 0	−3 ~ −7
NS25	−5 ~ 15	−5 ~ 0	−4 ~ −9
NS30	−5 ~ 15	−5 ~ 0	−4 ~ −9
NS35	−5 ~ 15	−6 ~ 0	−4 ~ −10

Note: Minus sign denotes a value is an amount of preload (elastic deformation of balls).

5. Basic Load Rating and Rating Life

The basic load rating used for expressing the load capacity of the linear guide is determined by ISO standards (ISO 14728-1, 14728-2). The load rating applied to NSK Linear Guides complies with the ISO standards.

The basic dynamic load rating is the non-fluctuating load which acts on the center of the ball slide from above, and under which the rating fatigue life of 100 km or 50 km is expressed. When load *F* is only applied to the ball slide in the up/down direction, its rating fatigue life, *L* can be calculated using the following equation, where *C*₁₀₀ means a basic dynamic load rating for 100 km rating fatigue life and *C*₅₀ means a basic dynamic load rating for 50 km rating fatigue life respectively.

The basic static load rating is the static load which generates a contact stress of 4 200 MPa at the center of the contact area between the rolling element subjected to the maximum stress and the raceway surface. In this most heavily stressed contact area, the sum of the permanent deformation of the rolling element and that of the raceway is nearly 0.0001 times the rolling element's diameter.

The basic load rating values are written in the dimension table. In NH and NS series, the contact angle is set at 50 degrees, and thus increasing load carrying capacity in vertical direction. Each basic load rating in the down, up and lateral load direction is shown at Table 11.

- Please note that the equation used here for calculating the product life is different from the one used for the linear guides for which rollers are used as rolling elements.
- The load factor is expressed as “*fw*”. Select the best-suited load factor, referring to the values given in Table 10, according to the potential vibration or impact loads in the machine onto which the linear guide is to be mounted.

$$L = 100 \times \left(\frac{C_{100}}{fw \cdot F} \right)^3 \quad \text{or} \quad L = 50 \times \left(\frac{C_{50}}{fw \cdot F} \right)^3 \quad [\text{km}]$$

The loads applied to the linear guide (i.e., ball slide loads) range from loads in the up/down or right/left direction to moment loads. Sometimes, more than one type of load is applied simultaneously or the volume and direction of the load may vary.

Varying loads cannot be used for the life calculation of the linear guide as they are. Therefore, it is necessary to use a hypothetical constant load applied to the ball slide, which would generate a fatigue life equivalent to the actual fatigue life. This is called the dynamic equivalent load. To calculate the dynamic equivalent load, use the loads provided in Table 12.

Table 12 Loads in the arrangement of linear guides

Pattern	Arrangement of linear guide	Loads necessary to calculate dynamic equivalent load					Dynamic equivalent load
		Load		Moment load			
		Up/down (vertical)	Right/left (lateral)	Rolling	Pitching	Yawing	
1		Fr	Fs	Mr	Mp	My	Fr = Fr Fse = Fs tan α Fre = εr Mr Fpe = εp Mp Fye = εy My α : Contact angle (=50°) Dynamic equivalent coefficients εr : Rolling direction εp : Pitching direction εy : Yawing direction
2		Fr	Fs	Mr			
3		Fr	Fs		Mp	My	
4		Fr	Fs				

The formula is determined by the relationship of loads in terms of volume. A full dynamic equivalent load can be easily obtained by using each coefficient.
After obtaining the dynamic equivalent load of the necessary load direction from Table 13, use the formulas below to calculate full dynamic equivalent loads.
· When *F_r* is the largest load: *F_e* = *F_r* + 0.5*F_{se}* + 0.5*F_{re}* + 0.5*F_{pe}* + 0.5*F_{ye}*
· When *F_{se}* is the largest load: *F_e* = 0.5*F_r* + *F_{se}* + 0.5*F_{re}* + 0.5*F_{pe}* + 0.5*F_{ye}*
· When *F_{re}* is the largest load: *F_e* = 0.5*F_r* + 0.5*F_{se}* + *F_{re}* + 0.5*F_{pe}* + 0.5*F_{ye}*
· When *F_{pe}* is the largest load: *F_e* = 0.5*F_r* + 0.5*F_{se}* + 0.5*F_{re}* + *F_{pe}* + 0.5*F_{ye}*
· When *F_{ye}* is the largest load: *F_e* = 0.5*F_r* + 0.5*F_{se}* + 0.5*F_{re}* + 0.5*F_{pe}* + *F_{ye}*
For the values of each dynamic equivalent load in the formulas above, disregard load directions and take the absolute value.

Table 10 Load factor *fw*

Impact/vibration	Load factor
No external impact/vibration	1.0 ~ 1.5
There is impact/vibration from outside.	1.5 ~ 2.0
There is significant impact/vibration.	2.0 ~ 3.0

Table 11 Basic load rating by load direction

Direction	Downward	Upward	Lateral
Load rating			
Basic dynamic load rating	<i>C</i>	<i>C</i>	0.84 <i>C</i>
Basic static load rating	<i>C</i> ₀	0.78 <i>C</i> ₀	0.65 <i>C</i> ₀

Fig. 4 Load directions

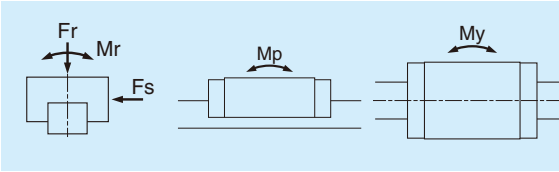


Table 13 Dynamic equivalent coefficients

Model	Dynamic equivalent coefficients (1/m)		
	ε _r	ε _p	ε _y
NH15AN, EM	188	111	132
NH15BN, GM	188	72	86
NH20AN, EM	142	81	97
NH20BN, GM	142	57	68
NH25AL, AN, EM	123	68	81
NH25BL, BN, GM	123	51	61
NH30AL, AN	98	70	83
NH30EM	98	58	69
NH30BL, BN, GM	98	44	52
NH35AL, AN, EM	78	51	61
NH35BL, BN, GM	78	36	43
NH45AL, AN, EM	60	38	45
NH45BL, BN, GM	60	30	36
NH55AL, AN, EM	51	31	37
NH55BL, BN, GM	51	25	30
NH65AN, EM	43	27	32
NH65BN, GM	43	20	24
NS15AL, EM	177	116	138
NS15CL, JM	177	174	208
NS20AL, EM	127	94	112
NS20CL, JM	127	136	162
NS25AL, EM	111	70	83
NS25CL, JM	111	108	129
NS30AL, EM	94	63	75
NS30CL, JM	94	102	121
NS35AL, EM	76	54	64
NS35CL, JM	76	87	104

6. Dust-proof parts and Lubrication accessories

(1) Standard specification

- Standard specification can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.
- Dust-proof parts are available, as shown in Table 14. Select the best-suited one according to the operation environment.

Table 14 Optional dust-proof parts

Name	Purpose
NSK K1 lubrication unit	Made of oil impregnated resin. Enhances lubricating functions.
Double seal	It combines two end seals for enhancing sealing function.
Protector	Protect the end seal from hot and hard contaminants.
Rail cap	Prevents foreign matters, such as swarf generated in cutting operation from clogging the rail-mounting holes.
Inner seal	Installed inside a slide, and prevents foreign matters from entering the rolling contact surface.
Bellows	Covers the linear guide.

Note: Inner seals can be selected for NH20-65 and NS20-35.


(2) Mounting position of the lubrication accessories

- The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (Fig. 6).
- Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

(3) NSK K1™ Lubrication unit

Table 15 shows the dimensions of the linear guides equipped with the NSK K1 lubrication unit.

Fig. 7

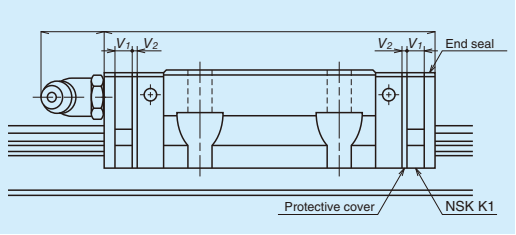

7. Rust Prevention

(1) Stainless steel

Stainless steel material can be selected for the parts made of carbon steel. The models which can be made with stainless steel are NH15-30 and NS15-35. However, the high precision (PH) grade and the medium preload (ZH) type of the random-matching type can not be made from stainless steel.

(2) Surface treatment

Regarding surface treatment, NSK recommends low temperature chrome plating or fluoride low temperature chrome plating. Please consult NSK for other surface treatment.

Table 16 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Fig. 5

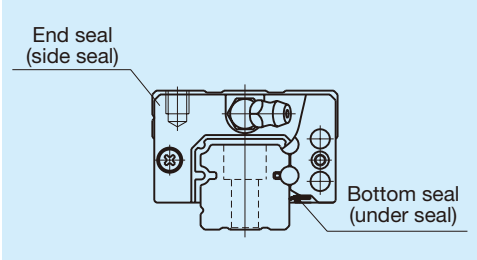


Fig. 6 Mounting position of lubrication accessories

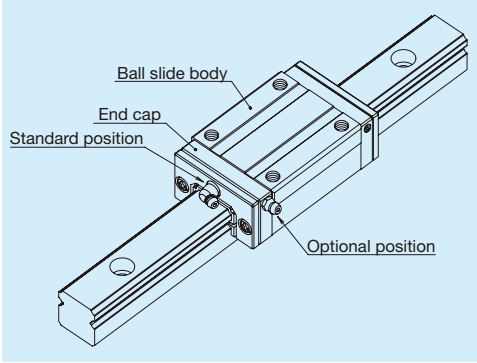


Table 15 Unit: mm

Model No.	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂	Protruding area of the grease fitting N
NH15	AN, EM 55	65.6	4.5	0.8	(5)
	BN, GM 74	84.6			
NH20	AN, EM 69.8	80.4	4.5	0.8	(14)
	BN, GM 91.8	102.4			
NH25	AL, AN, EM 79	90.6	5	0.8	(14)
	BL, BN, GM 107	118.6			
NH30	AL, AN 85.6	97.6	5	1	(14)
	EM 98.6	110.6			
NH35	BL, BN, GM 124.6	136.6	5.5	1	(14)
	AL, AN, EM 109	122			
NH45	AL, AN, EM 139	154	6.5	1	(15)
	BL, BN, GM 171	186			
NH55	AL, AN, EM 163	178	6.5	1	(15)
	BL, BN, GM 201	216			
NH65	AN, EM 193	211	8	1	(16)
	BN, GM 253	271			
NS15	AL, EM 56.8	66.4	4	0.8	(5)
	CL, JM 40.4	50			
NS20	AL, EM 65.2	75.8	4.5	0.8	(14)
	CL, JM 47.2	57.8			
NS25	AL, EM 81.6	92.2	4.5	0.8	(14)
	CL, JM 59.6	70.2			
NS30	AL, EM 96.4	108.4	5	1	(14)
	CL, JM 67.4	79.4			
NS35	AL, EM 108	121	5.5	1	(14)
	CL, JM 77	90			

Notes:
(1) NSK K1 for food and medical equipments are available for NH15-35 and NS15-35.
(2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ x Number of NSK K1) + (Thickness of the protective cover, V₂ x 2)

8. Installation

(1) Permissible values of mounting error

Mounting errors may result in harmful effects, such as shortened operating life, deteriorated motion accuracy and/or friction variation. Using those mounting errors shown in Figures 8 and 9 as representative errors, Tables 17 and 18 show the mounting tolerances.

Fig. 8

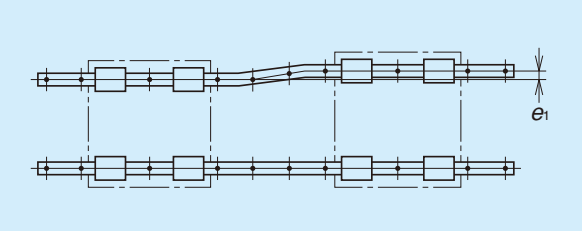


Fig. 9

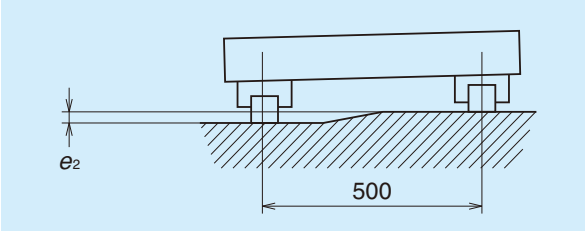


Table 17

Value	Preload	Model No.							
		NH15	NH20	NH25	NH30	NH35	NH45	NH55	NH65
Permissible values of parallelism in two rails e ₁	Z0, ZT	22	30	40	45	55	65	80	110
	Z1, ZZ	18	20	25	30	35	45	55	70
Permissible values of parallelism (height) in two rails e ₂	Z0, ZT	375μm/500mm							
	Z1, ZZ, Z3, ZH	330μm/500mm							

Table 18

Value	Preload	Model No.			
		NS15	NS20	NS25	NS35
Permissible values of parallelism in two rails e ₁	Z0, ZT	20	22	30	35
	Z1, ZZ	15	17	20	25
Permissible values of parallelism (height) in two rails e ₂	Z0, ZT	375μm/500mm			
	Z1, ZZ, Z3, ZH	330μm/500mm			

(2) Shoulder height and corner radius of the mounting surface

When horizontally fixing a rail or ball slide by pushing it to the shoulder (the riser portion of the mounting surface) of the bed or table, refer to the shoulder height and corner radius specified in Fig. 10 and 11 and Table 18 as well.

Shoulder height of the mounting surface and corner radius r





Fig. 10 Shoulder for the rail datum surface

Fig. 11 Shoulder for the ball slide datum surface

Table 19 Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	ra	rb	H'	H''
NH15	0.5	0.5	4	4
NH20	0.5	0.5	4.5	5
NH25	0.5	0.5	5	5
NH30	0.5	0.5	6	6
NH35	0.5	0.5	6	6
NH45	0.7	0.7	8	8
NH55	0.7	0.7	10	10
NH65	1	1	11	11
NS15	0.5	0.5	4	4
NS20	0.5	0.5	4.5	5
NS25	0.5	0.5	5	5
NS30	0.5	0.5	6	6
NS35	0.5	0.5	6	6

9. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with linear guide under normal conditions is shown in Table 19. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc.

If the operation is made exceeding the permissible distance and speed, please contact NSK.

Table 20 Maximum allowable speed

Series	Size	15	20	25	30	35	45	55	65
NH		300					200		150
NS		300					—		—

10. Handling Precautions

- (1) Beating a slide or hitting it against an object may cause damage.
- (2) Operating temperature should be less than 80°C. If exceeding this temperature, the plastic parts might be damaged.
- (3) If using NSK K1, maximum temperature in use : 50°C (momentary maximum temperature in use: 80°C). Do not leave NSK K1 lubrication unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust prevention oil which contains white kerosene.
- (4) Regarding the handling of random-matching products.
 - a) Slides of random-matching type are assembled on a provisional rail (an inserting tool) when it is delivered.
 - b) When a slide is installed to the rail, make certain to use a provisional rail.
 - c) Do not remove slides from the provisional rail, except installation to the rail.

11. Dimensions

NH-AN (High-load type/standard, square type)
NH-BN (Super-high-load type/long, square type)

(1) Reference number for assembly

NH 30 1200 ANC 2 -** P5 3															
Series name				Preload code (refer to Table 9 on page 5) 0 : Z0, 1 : Z1, 3 : Z3, T : ZT, Z : ZZ, H : ZH											
Size				Accuracy code (refer to Table 9 on page 5)											
Rail length (mm)				Design serial number Added to the reference number											
Ball slide shape code (refer to Fig. 2 on page 3)				Number of ball slides per rail											
Material/surface treatment code (refer to Table 16 on page 7) C: Special high carbon steel (NSK standard); K: Stainless steel															


(2) Reference number for random-matching type

NAH 30 ANSZ -K															
Ball slide				Option code											
Random-matching ball slide series code NAH: NH Series random-matching ball slide				-K: Equipped with NSK K1 -F: Fluoride low temperature chrome plating + AS2 grease -F50: Fluoride low temperature chrome plating + LG2 grease											
Size				Preload code No code: Fine clearance, Z: Slight preload, H: Medium preload											
Ball slide shape code (refer to Fig. 2 on page 3)				Material code No code: Special high carbon steel (NSK standard), S: Stainless steel											


N1H 30 1200 LCN -** PC Z															
Rail				Preload code T: Fine clearance, Z: Slight preload (common rail for slight or medium preload) (refer to Table 9 on page 5)											
Random-matching rail series code N1H: NH Series random-matching rail				Accuracy code PH: High precision grade random-matching type PC: Normal grade random-matching type											
Size				Design serial number Added to the reference number											
Rail length (mm)				Butting rail specification* N: Non-butting; L: Butting specification *Please consult with NSK for butting rail specification.											
Rail shape code: L L: Standard															
Material/surface treatment code (refer to Table 16 on page 7)															

Assembly (Preloaded assembly, random-matching type)


Front view of AN and BN types

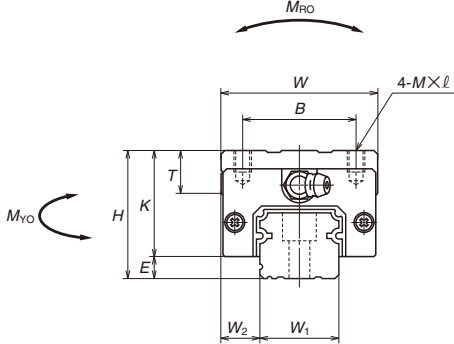

Side view of AN type

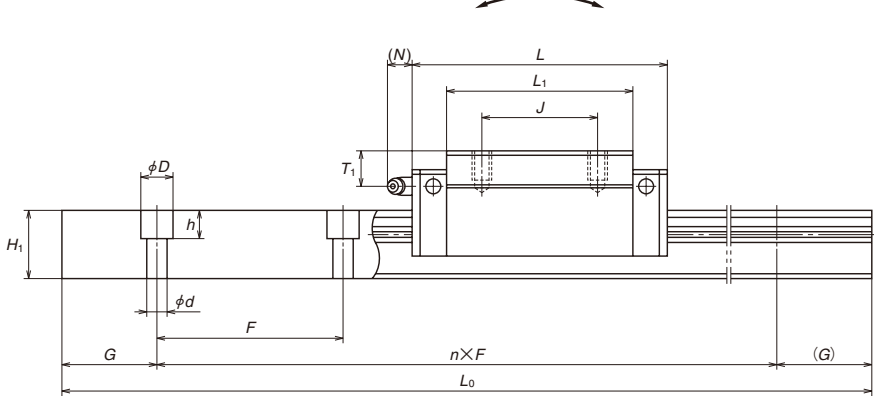


Side view of BN type

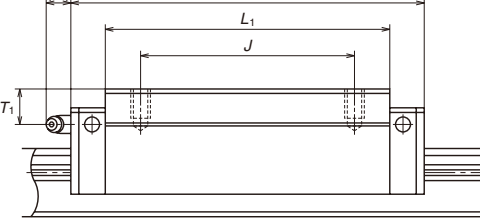


Ball slide of random-matching type


AN and BN types





AN type

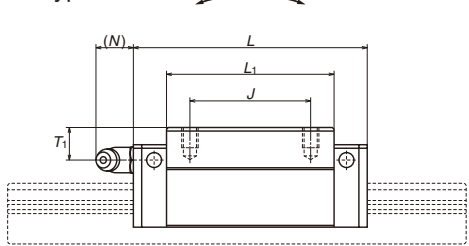

BN type

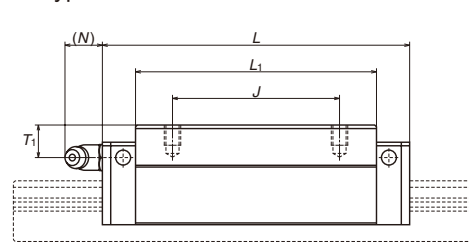

Rail of random-matching type

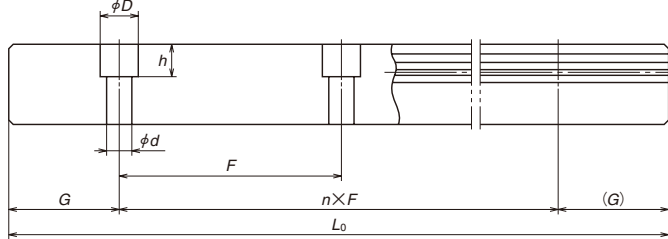

Model No.	Assembly			Ball slide											Width		Height
	Height			Width	Length	Mounting hole						Grease fitting					
												Hole size					
	<i>H</i>	<i>E</i>	<i>W₂</i>	<i>W</i>	<i>L</i>	<i>B</i>	<i>J</i>	<i>M</i> × <i>Pitch</i> × <i>ℓ</i>	<i>L₁</i>	<i>K</i>	<i>T</i>				<i>W₁</i>	<i>H₁</i>	
NH15AN NH15BN	28	4.6	9.5	34	55 74	26	26	M4×0.7×6	39 58	23.4	8	ϕ3	8.5	3.3	15	15	
NH20AN NH20BN	30	5	12	44	69.8 91.8	32	36 50	M5×0.8×6	50 72	25	12	M6×0.75	5	11	20	18	
NH25AN NH25BN	40	7	12.5	48	79 107	35	35 50	M6×1×9	58 86	33	12	M6×0.75	10	11	23	22	
NH30AN NH30BN	45	9	16	60	85.6 124.6	40	40 60	M8×1.25×10	59 98	36	14	M6×0.75	10	11	28	26	
NH35AN NH35BN	55	9.5	18	70	109 143	50	50 72	M8×1.25×12	80 114	45.5	15	M6×0.75	15	11	34	29	
NH45AN NH45BN	70	14	20.5	86	139 171	60	60 80	M10×1.5×17	105 137	56	17	Rc1/8	20	13	45	38	
NH55AN NH55BN	80	15	23.5	100	163 201	75	75 95	M12×1.75×18	126 164	65	18	Rc1/8	21	13	53	44	
NH65AN NH65BN	90	16	31.5	126	193 253	76	70 120	M16×2×20	147 207	74	23	Rc1/8	19	13	63	53	

Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Rail				Basic load rating								Weight	
Pitch	Mounting bolt hole $d \times D \times h$	G	Max. length L_{0max} () for stainless	2) Dynamic		Static C_0 (N)	M_{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
F				$C_{50}(N)$	$C_{100}(N)$			M_{PO}		M_{YO}			
								(One slide)	(Two slides)	(One slide)	(Two slides)		
60	4.5×7.5×5.3	20	2 980 (1 800)	14 200 18 100	11 300 14 400	20 700 32 000	108 166	94.5 216	575 1 150	79.5 181	480 965	0.18 0.26	1.6
60	6×9.5×8.5	20	3 960 (3 500)	23 700 30 000	18 800 24 000	32 500 50 500	219 340	185 420	1 140 2 230	155 355	955 1 870	0.33 0.48	2.6
60	7×11×9	20	3 960 (3 500)	33 500 45 500	26 800 36 500	46 000 71 000	360 555	320 725	1 840 3 700	267 610	1 540 3 100	0.55 0.82	3.6
80	9×14×12	20	4 000 (3 500)	41 000 61 000	32 500 48 500	51 500 91 500	490 870	350 1 030	2 290 5 600	292 865	1 920 4 700	0.77 1.3	5.2
80	9×14×12	20	4 000	62 500 81 000	49 500 64 500	80 500 117 000	950 1 380	755 1 530	4 500 8 350	630 1 280	3 800 7 000	1.5 2.1	7.2
105	14×20×17	22.5	3 990	107 000 131 000	84 500 104 000	140 000 187 000	2 140 2 860	1 740 3 000	9 750 15 600	1 460 2 520	8 150 13 100	3.0 3.9	12.3
120	16×23×20	30	3 960	158 000 193 000	125 000 153 000	198 000 264 000	3 600 4 850	3 000 5 150	16 300 26 300	2 510 4 350	13 700 22 100	4.7 6.1	16.9
150	18×26×22	35	3 900	239 000 310 000	190 000 246 000	281 000 410 000	6 150 8 950	4 950 10 100	27 900 51 500	4 150 8 450	23 400 43 500	7.7 10.8	24.3

2) The basic load rating comply with the ISO standard. (ISO14728-1 and ISO14728-2)

C50: the basic dynamic load rating for 50 km rating fatigue life, C100: the basic dynamic load rating for 100 km rating fatigue life

NH-AL (High-load type/standard, square low-profile type)
NH-BL (Super-high-load type/long, square low-profile type)

(1) Reference number for assembly

NH 30 1200 AL C 2 -** P5 3													
Series name				Preload code (refer to Table 9 on page 5) 0 : Z0, 1 : Z1, 3 : Z3, T : ZT, Z : ZZ, H : ZH									
Size				Accuracy code (refer to Table 9 on page 5)									
Rail length (mm)				Design serial number Added to the reference number									
Ball slide shape code (refer to Fig. 2 on page 3)				Number of ball slides per rail									
Material/surface treatment code (refer to Table 16 on page 7) C: Special high carbon steel (NSK standard); K: Stainless steel													


(2) Reference number for random-matching type

NAH 30 AL SZ -K													
Ball slide				Option code									
Random-matching ball slide series code NAH: NH Series random-matching ball slide				-K: Equipped with NSK K1 -F: Fluoride low temperature chrome plating + AS2 grease -F50: Fluoride low temperature chrome plating+ LG2 grease									
Size				Preload code No code: Fine clearance, Z: Slight preload, H: Medium preload									
Ball slide shape code (refer to Fig. 2 on page 3)				Material code No code: Special high carbon steel (NSK standard), S: Stainless steel									


Rail														N1H 30 1200 LCN -*** PC Z													
Random-matching rail series code														Preload code													
N1H: NH Series random-matching rail														T: Fine clearance, Z: Slight preload (common rail for slight or medium preload) (refer to Table 9 on page 5)													
Size														Accuracy code													
Rail length (mm)														PH: High precision grade random-matching type PC: Normal grade random-matching type													
Rail shape code: L														Design serial number													
L: Standard														Added to the reference number													
Material/surface treatment code (refer to Table 16 on page 7)														Butting rail specification*													
														N: Non-butting; L: Butting specification													
														*Please consult with NSK for butting rail specification.													

Assembly (Preloaded assembly, random-matching type)


Front view of AL and BL types

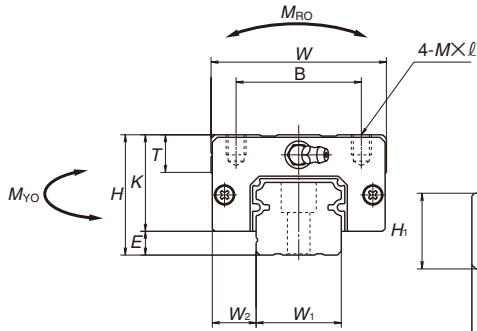

Side view of AL type

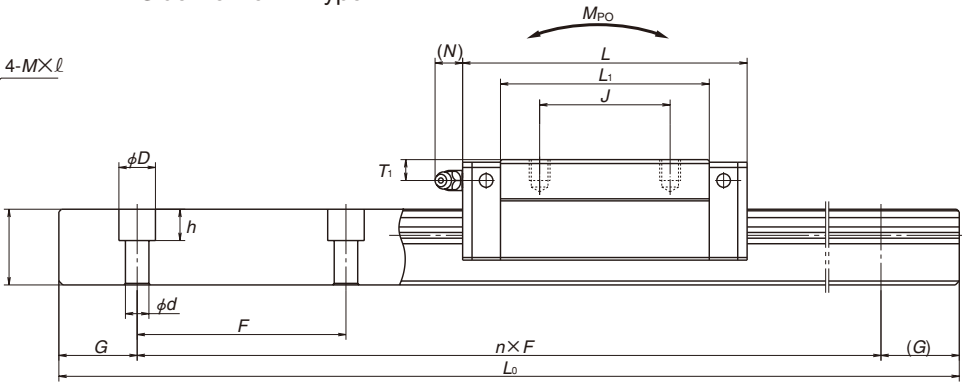

Side view of BL type



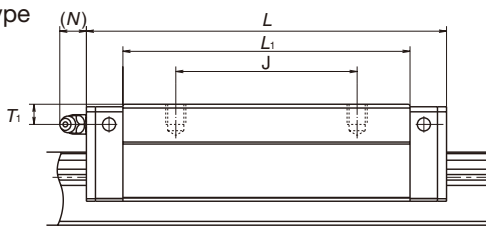


Ball slide of random-matching type



AL and BL types

AL type

BL type

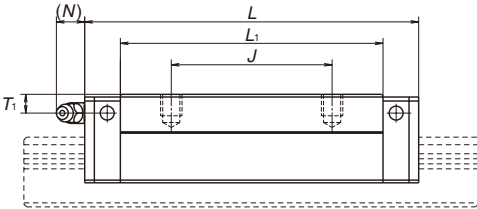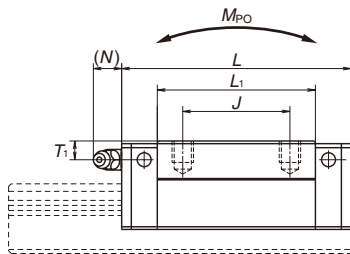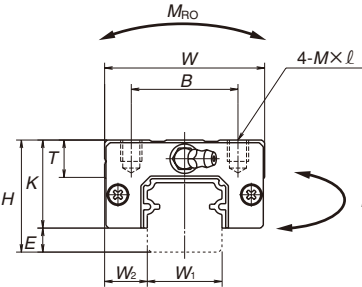

Rail of random-matching type

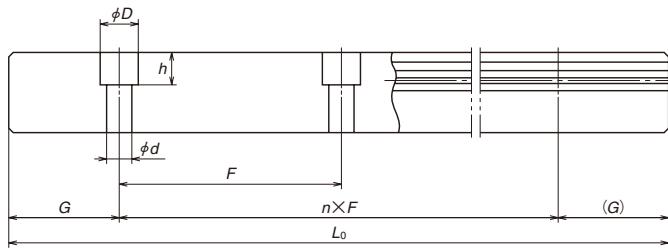

Model No.	Assembly			Ball slide											Width	Height
	Height			Width	Length	Mounting hole						Grease fitting				
												Hole size				
NH25AL NH25BL	36	7	12.5	48	79 107	35	35 50	M6×1×6	58 86	29	12	M6×0.75	6	11	23	22
NH30AL NH30BL	42	9	16	60	85.6 124.6	40	40 60	M8×1.25×8	59 98	33	14	M6×0.75	7	11	28	26
NH35AL NH35BL	48	9.5	18	70	109 143	50	50 72	M8×1.25×8	80 114	38.5	15	M6×0.75	8	11	34	29
NH45AL NH45BL	60	14	20.5	86	139 171	60	60 80	M10×1.5×10	105 137	46	17	Rc1/8	10	13	45	38
NH55AL NH55BL	70	15	23.5	100	163 201	75	75 95	M12×1.75×13	126 164	55	15	Rc1/8	11	13	53	44

Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Unit: mm													
Rail				Basic load rating								Weight	
Pitch <i>F</i>	Mounting bolt hole <i>d</i> × <i>D</i> × <i>h</i>	G (reference)	Max. length <i>L</i> _{0max} () for stainless	2) Dynamic		Static	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)	
				[50km] <i>C</i> ₅₀ (N)	[100km] <i>C</i> ₁₀₀ (N)	<i>C</i> ₀ (N)	<i>M</i> _{RO}	<i>M</i> _{PO}		<i>M</i> _{YO}			
								(One slide)	(Two slides)	(One slide)	(Two slides)		
60	7×11×9	20	3 960 (3 500)	33 500 45 500	26 800 36 500	46 000 71 000	360 555	320 725	1 840 3 700	267 610	1 540 3 100	0.46 0.69	3.6
80	9×14×12	20	4 000 (3 500)	41 000 61 000	32 500 48 500	51 500 91 500	490 870	350 1 030	2 290 5 600	292 865	1 920 4 700	0.69 1.16	5.2
80	9×14×12	20	4 000	62 500 81 000	49 500 64 500	80 500 117 000	950 1 380	755 1 530	4 500 8 350	630 1 280	3 800 7 000	1.2 1.7	7.2
105	14×20×17	22.5	3 990	107 000 131 000	84 500 104 000	140 000 187 000	2 140 2 860	1 740 3 000	9 750 15 600	1 460 2 520	8 150 13 100	2.2 2.9	12.3
120	16×23×20	30	3 960	158 000 193 000	125 000 153 000	198 000 264 000	3 600 4 850	3 000 5 150	16 300 26 300	2 510 4 350	13 700 22 100	3.7 4.7	16.9

2) The basic load rating comply with the ISO standard. (ISO14728-1 and ISO14728-2)

C₅₀: the basic dynamic load rating for 50 km rating fatigue life, C₁₀₀: the basic dynamic load rating for 100 km rating fatigue life

NH-EM (High-load type/standard, flange type)
NH-GM (Super-high-load type/long, flange type)

(1) Reference number for assembly

NH 30 1200 EMC 2 -** P5 3															
Series name				Preload code (refer to Table 9 on page 5) 0 : Z0, 1 : Z1, 3 : Z3, T : ZT, Z : ZZ, H : ZH											
Size				Accuracy code (refer to Table 9 on page 5)											
Rail length (mm)				Design serial number Added to the reference number											
Ball slide shape code (refer to Fig. 2 on page 3)				Number of ball slides per rail											
Material/surface treatment code (refer to Table 16 on page 7) C: Special high carbon steel (NSK standard); K: Stainless steel															

(2) Reference number for random-matching type


NAH 30 EMSZ -K															
Ball slide				Option code											
Random-matching ball slide series code NAH: NH Series random-matching ball slide				-K: Equipped with NSK K1 -F: Fluoride low temperature chrome plating + AS2 grease -F50: Fluoride low temperature chrome plating + LG2 grease											
Size				Preload code No code: Fine clearance, Z: Slight preload, H: Medium preload											
Ball slide shape code (refer to Fig. 2 on page 3)				Material code No code: Special high carbon steel (NSK standard), S: Stainless steel											

Rail																N1H 30 1200 LCN -*** PC Z															
Random-matching rail series code																Preload code															
N1H: NH Series random-matching rail																T: Fine clearance, Z: Slight preload (common rail for slight or medium preload) (refer to Table 9 on page 5)															
Size																Accuracy code															
Rail length (mm)																PH: High precision grade random-matching type PC: Normal grade random-matching type															
Rail shape code: L																Design serial number															
L: Standard																Added to the reference number															
Material/surface treatment code (refer to Table 16 on page 7)																Butting rail specification*															
																N: Non-butting; L: Butting specification															
*Please consult with NSK for butting rail specification.																															


Assembly (Preloaded assembly, random-matching type)

Front view of EM and GM types

Side view of EM type

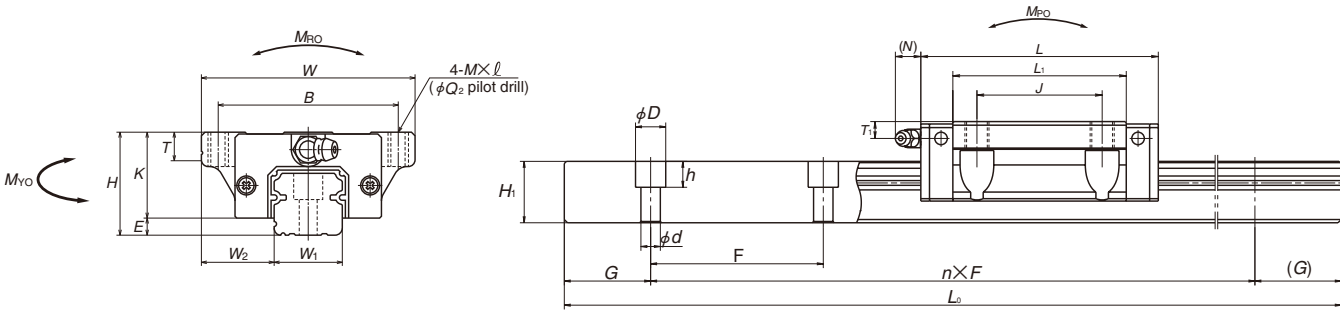

Side view of GM type

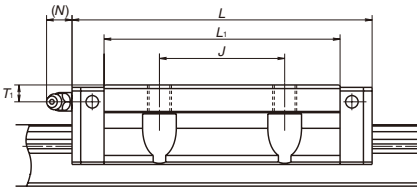


Ball slide of random-matching type



EM and GM types

EM type

GM type

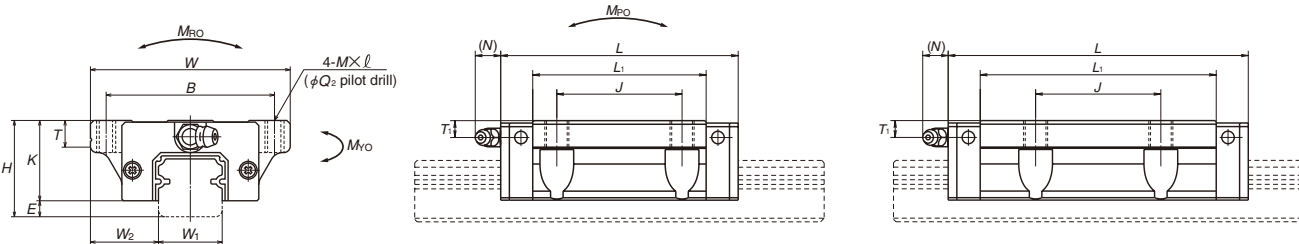

Rail of random-matching type

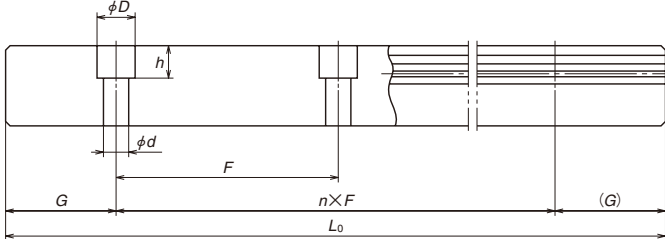

Model No.	Assembly			Ball slide												Width		Height
	Height			Width	Length	Mounting hole								Grease fitting				
														Hole size				
	H	E	W_2	W	L	B	J	$M \times \text{Pitch} \times \ell$	Q_2	L_1	K	T		T_1	N	W_1	H_1	
NH15EM NH15GM	24	4.6	16	47	55 74	38	30	M5×0.8×7	4.4	39 58	19.4	8	φ3	4.5	3.3	15	15	
NH20EM NH20GM	30	5	21.5	63	69.8 91.8	53	40	M6×1×9.5	5.3	50 72	25	10	M6×0.75	5	11	20	18	
NH25EM NH25GM	36	7	23.5	70	79 107	57	45	M8×1.25×10 (M8×1.25×11.5)	6.8	58 86	29	11 (12)	M6×0.75	6	11	23	22	
NH30EM NH30GM	42	9	31	90	98.6 124.6	72	52	M10×1.5×12 (M10×1.5×14.5)	8.6	72 98	33	11 (15)	M6×0.75	7	11	28	26	
NH35EM NH35GM	48	9.5	33	100	109 143	82	62	M10×1.5×13	8.6	80 114	38.5	12	M6×0.75	8	11	34	29	
NH45EM NH45GM	60	14	37.5	120	139 171	100	80	M12×1.75×15	10.5	105 137	46	13	Rc1/8	10	13	45	38	
NH55EM NH55GM	70	15	43.5	140	163 201	116	95	M14×2×18	12.5	126 164	55	15	Rc1/8	11	13	53	44	
NH65EM NH65GM	90	16	53.5	170	193 253	142	110	M16×2×24	14.6	147 207	74	23	Rc1/8	19	13	63	53	

Notes: 1) Parenthesized dimensions are for items made of stainless steel.
2) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Unit: mm													
Rail				Basic load rating								Weight	
Pitch <i>F</i>	Mounting bolt hole <i>d</i> × <i>D</i> × <i>h</i>	G (reference)	Max. length <i>L</i> _{0max} () for stainless	3) Dynamic		Static <i>C</i> ₀ (N)	<i>M</i> _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] <i>C</i> ₅₀ (N)	[100km] <i>C</i> ₁₀₀ (N)			<i>M</i> _{PO}		<i>M</i> _{YO}			
								(One slide)	(Two slides)	(One slide)	(Two slides)		
60	4.5×7.5×5.3	20	2 980 (1 800)	14 200 18 100	11 300 14 400	20 700 32 000	108 166	94.5 216	575 1 150	79.5 181	480 965	0.17 0.25	1.6
60	6×9.5×8.5	20	3 960 (3 500)	23 700 30 000	18 800 24 000	32 500 50 500	219 340	185 420	1 140 2 230	155 355	955 1 870	0.45 0.65	2.6
60	7×11×9	20	3 960 (3 500)	33 500 45 500	26 800 36 500	46 000 71 000	360 555	320 725	1 840 3 700	267 610	1 540 3 100	0.63 0.93	3.6
80	9×14×12	20	4 000 (3 500)	47 000 61 000	37 500 48 500	63 000 91 500	600 870	505 1 030	3 150 5 600	425 865	2 650 4 700	1.2 1.6	5.2
80	9×14×12	20	4 000	62 500 81 000	49 500 64 500	80 500 117 000	950 1 380	755 1 530	4 500 8 350	630 1 280	3 800 7 000	1.7 2.4	7.2
105	14×20×17	22.5	3 990	107 000 131 000	84 500 104 000	140 000 187 000	2 140 2 860	1 740 3 000	9 750 15 600	1 460 2 520	8 150 13 100	3 3.9	12.3
120	16×23×20	30	3 960	158 000 193 000	125 000 153 000	198 000 264 000	3 600 4 850	3 000 5 150	16 300 26 300	2 510 4 350	13 700 22 100	5 6.5	16.9
150	18×26×22	35	3 900	239 000 310 000	190 000 246 000	281 000 410 000	6 150 8 950	4 950 10 100	27 900 51 500	4 150 8 450	23 400 43 500	10 14.1	24.3

3) The basic load rating comply with the ISO standard. (ISO14728-1 and ISO14728-2)
 C_{50} : the basic dynamic load rating for 50 km rating fatigue life, C_{100} : the basic dynamic load rating for 100 km rating fatigue life

NS-CL (Medium-load type/short, square low-profile type)
NS-AL (High-load type/standard, square low-profile type)

(1) Reference number for assembly

NS 30 1200 AL C 2 -** P5 3													
Series name				Preload code (refer to Table 9 on page 5) 0 : Z0, 1 : Z1, 3 : Z3, T : ZT, Z : ZZ, H : ZH									
Size				Accuracy code (refer to Table 9 on page 5)									
Rail length (mm)				Design serial number Added to the reference number									
Ball slide shape code (refer to Fig. 2 on page 3)				Number of ball slides per rail									
Material/surface treatment code (refer to Table 16 on page 7) C: Special high carbon steel (NSK standard); K: Stainless steel													


(2) Reference number for random-matching type

NAS 30 AL SZ -K													
Ball slide				Option code									
Random-matching ball slide series code NAS: NS Series random-matching ball slide				-K: Equipped with NSK K1 -F: Fluoride low temperature chrome plating + AS2 grease -F50: Fluoride low temperature chrome plating + LG2 grease									
Size				Preload code No code: Fine clearance, Z: Slight preload, H: Medium preload									
Ball slide shape code (refer to Fig. 2 on page 3)				Material code No code: Special high carbon steel (NSK standard), S: Stainless steel									


Rail														N1S 30 1200 LCN -** PC Z													
Random-matching rail series code														Preload code													
N1S: NS Series random-matching rail														T: Fine clearance, Z: Slight preload (common rail for slight or medium preload) (refer to Table 9 on page 5)													
Size														Accuracy code													
Rail length (mm)														PH: High precision grade random-matching type PC: Normal grade random-matching type													
Rail shape code: L														Design serial number													
L: Standard, T: The rail mounting bolt hole M4 for NS15														Added to the reference number													
Material/surface treatment code (refer to Table 16 on page 7)														Butting rail specification*													
														N: Non-butting; L: Butting specification													
														*Please consult with NSK for butting rail specification.													

Assembly (Preloaded assembly, random-matching type)


Front view of AL and CL types

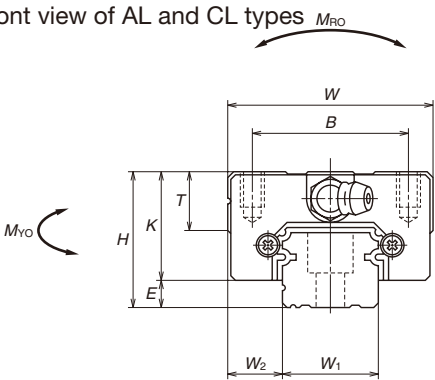

Side view of AL type

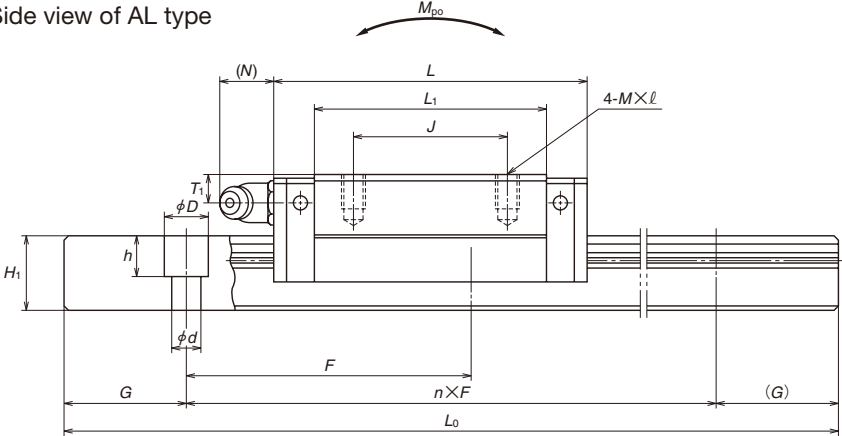


Side view of CL type

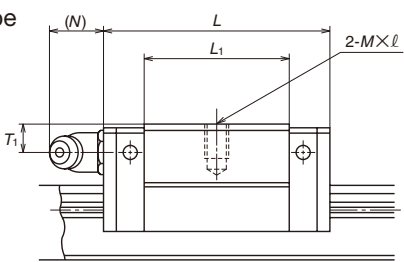


Ball slide of random-matching type


AL and CL types





AL type

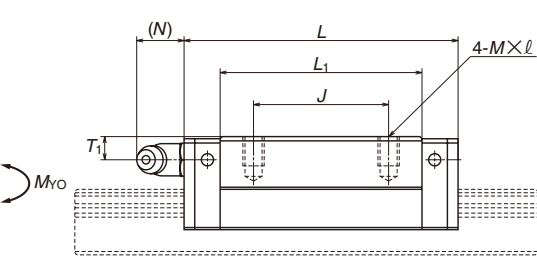

CL type

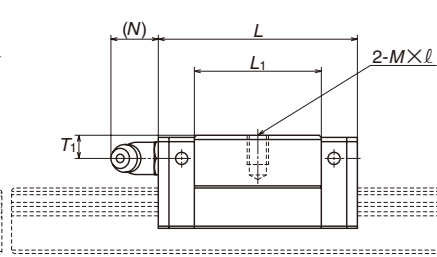

Rail of random-matching type

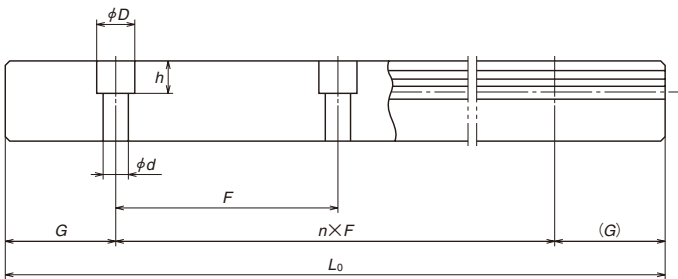

Model No.	Assembly			Ball slide											Width		Height
	Height			Width	Length	Mounting hole						Grease fitting					
												Hole size					
NS15CL NS15AL	24	4.6	W ₂	W	L	B	J	M×Pitch×ℓ	L ₁	K	T	ϕ 3	T ₁	N	W ₁	H ₁	
NS20CL NS20AL	28	6	11	42	40.4 56.8	26	— 26	M4×0.7×6	23.6 40	19.4	10	6	3	15	12.5		
NS25CL NS25AL	33	7	12.5	48	47.2 65.2	32	— 32	M5×0.8×7	30 48	22	12	M6×0.75	5.5	11	20	15.5	
NS30CL NS30AL	42	9	16	60	59.6 81.6	35	— 35	M6×1×9	38 60	26	12	M6×0.75	7	11	23	18	
NS35CL NS35AL	48	10.5	18	70	67.4 96.4	40	— 40	M8×1.25×12	42 71	33	13	M6×0.75	8	11	28	23	
NS35CL NS35AL	48	10.5	18	70	77 108	50	— 50	M8×1.25×12	49 80	37.5	14	M6×0.75	8.5	11	34	27.5	

Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.
2) The basic load rating comply with the ISO standard. (ISO14728-1 and ISO14728-2)
C50: the basic dynamic load rating for 50 km rating fatigue life, C100: the basic dynamic load rating for 100 km rating fatigue life

Unit: mm													
Rail				Basic load rating								Weight	
Pitch <i>F</i>	Mounting bolt hole <i>d</i> × <i>D</i> × <i>h</i>	G (reference)	Max. length <i>L</i> _{0max} () for stainless	2) Dynamic		Static	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)	
				[50km] <i>C</i> ₅₀ (N)	[100km] <i>C</i> ₁₀₀ (N)	<i>C</i> ₀ (N)	<i>M</i> _{RO}	<i>M</i> _{PO}		<i>M</i> _{YO}			
								(One slide)	(Two slides)	(One slide)	(Two slides)		
60	*3.5×6×4.5 4.5×7.5×5.3	20	2 920 (1 700)	7 250 11 200	5 750 8 850	9 100 16 900	45.5 84.5	24.5 77	196 470	20.5 64.5	165 395	0.14 0.20	1.4
60	6×9.5×8.5	20	3 960 (3 500)	10 600 15 600	8 400 12 400	13 400 23 500	91.5 160	46.5 133	330 755	39 111	279 630	0.19 0.28	2.3
60	7×11×9	20	3 960 (3 500)	17 700 26 100	14 000 20 700	20 800 36 500	164 286	91 258	655 1 470	76 217	550 1 230	0.34 0.51	3.1
80	7×11×9	20	4 000 (3 500)	24 700 38 000	19 600 30 000	29 600 55 000	282 520	139 435	1 080 2 650	116 365	905 2 220	0.58 0.85	4.8
80	9×14×12	20	4 000 (3 500)	34 500 52 500	27 300 42 000	40 000 74 500	465 865	220 695	1 670 4 000	185 580	1 400 3 350	0.86 1.3	7.0

*1) Standard rail mounting bolt hole for NS15 is specified as hole for M3 (3.5 × 6 × 4.5).
Please contact NSK to request a different hole for M4 (4.5 × 7.5 × 5.3).

NS-JM (Medium-load type/short, flange type)
NS-EM (High-load type/standard, flange type)

(1) Reference number for assembly

NS 30 1200 EMC 2 -** P5 3									
Series name				Preload code (refer to Table 9 on page 5) 0 : Z0, 1 : Z1, 3 : Z3, T : ZT, Z : ZZ, H : ZH					
Size				Accuracy code (refer to Table 9 on page 5)					
Rail length (mm)				Design serial number Added to the reference number					
Ball slide shape code (refer to Fig. 2 on page 3)				Number of ball slides per rail					
Material/surface treatment code (refer to Table 16 on page 7) C: Special high carbon steel (NSK standard); K: Stainless steel									


(2) Reference number for random-matching type

NAS 30 EMSZ -K									
Ball slide				Option code					
Random-matching ball slide series code NAS: NS Series random-matching ball slide				-K: Equipped with NSK K1 -F: Fluoride low temperature chrome plating + AS2 grease -F50: Fluoride low temperature chrome plating + LG2 grease					
Size				Preload code No code: Fine clearance, Z: Slight preload, H: Medium preload					
Ball slide shape code (refer to Fig. 2 on page 3)				Material code No code: Special high carbon steel (NSK standard), S: Stainless steel					


Rail										N1S 30 1200 LCN -*** PC Z									
Random-matching rail series code										Preload code									
N1S: NS Series random-matching rail										T: Fine clearance, Z: Slight preload (common rail for slight or medium preload) (refer to Table 9 on page 5)									
Size										Accuracy code									
Rail length (mm)										PH: High precision grade random-matching type PC: Normal grade random-matching type									
Rail shape code: L										Design serial number									
L: Standard, T: The rail mounting bolt hole M4 for NS15										Added to the reference number									
Material/surface treatment code (refer to Table 16 on page 7)										Butting rail specification*									
										N: Non-butting; L: Butting specification									
										*Please consult with NSK for butting rail specification.									

Assembly (Preloaded assembly, random-matching type)


Front view of EM and JM types

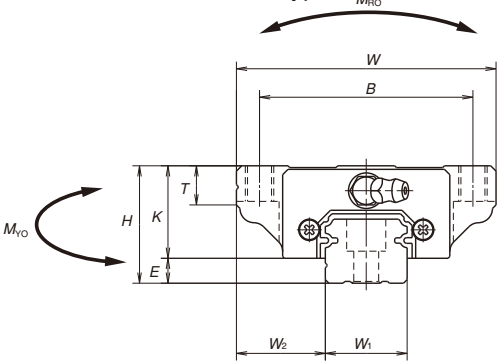

Side view of EM type

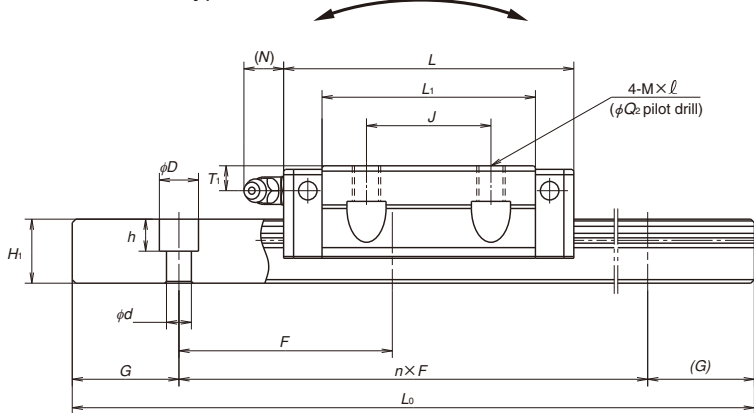


Side view of JM type

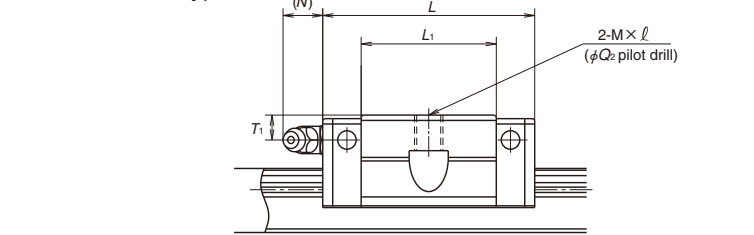


Ball slide of random-matching type


EM and JM types





EM type

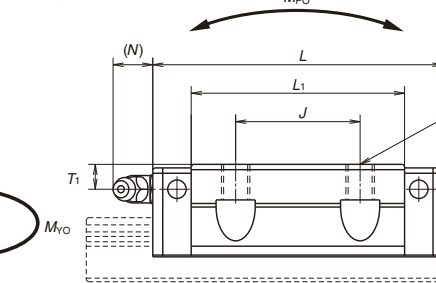

JM type

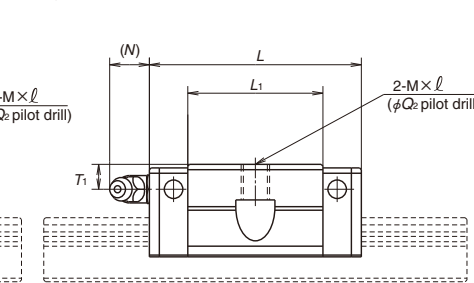

Rail of random-matching type

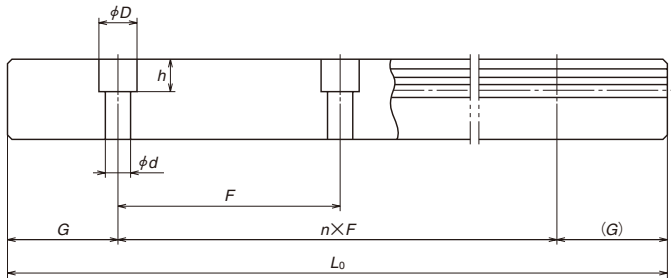

Model No.	Assembly			Ball slide												Width W_1	Height H_1
	Height H	E	W_2	Width W	Length L	Mounting hole				L_1	K	T	Grease fitting				
						B	J	$M \times \text{Pitch} \times \ell$	Q_2				Hole size	T_1	N		
NS15JM NS15EM	24	4.6	18.5	52	40.4 56.8	41	— 26	$M5 \times 0.8 \times 7$	4.4	23.6 40	19.4	8	$\phi 3$	6	3	15	12.5
NS20JM NS20EM	28	6	19.5	59	47.2 65.2	49	— 32	$M6 \times 1 \times 9$ ($M6 \times 1 \times 9.5$)	5.3	30 48	22	10	$M6 \times 0.75$	5.5	11	20	15.5
NS25JM NS25EM	33	7	25	73	59.6 81.6	60	— 35	$M8 \times 1.25 \times 10$ ($M8 \times 1.25 \times 11.5$)	6.8	38 60	26	11 (12)	$M6 \times 0.75$	7	11	23	18
NS30JM NS30EM	42	9	31	90	67.4 96.4	72	— 40	$M10 \times 1.5 \times 12$ ($M10 \times 1.5 \times 14.5$)	8.6	42 71	33	11 (15)	$M6 \times 0.75$	8	11	28	23
NS35JM NS35EM	48	10.5	33	100	77 108	82	— 50	$M10 \times 1.5 \times 13$ ($M10 \times 1.5 \times 14.5$)	8.6	49 80	37.5	12 (15)	$M6 \times 0.75$	8.5	11	34	27.5

Notes: 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.
2) Parenthesized dimensions are for items made of stainless steel.

Unit: mm													
Rail				Basic load rating								Weight	
Pitch <i>F</i>	Mounting bolt hole <i>d</i> × <i>D</i> × <i>h</i>	G (reference)	Max. length <i>L</i> _{0max} () for stainless	3) Dynamic		Static	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)	
				[50km] <i>C</i> ₅₀ (N)	[100km] <i>C</i> ₁₀₀ (N)	<i>C</i> ₀ (N)	<i>M</i> _{RO}	<i>M</i> _{PO}		<i>M</i> _{YO}			
								(One slide)	(Two slides)	(One slide)	(Two slides)		
60	*3.5×6×4.5 4.5×7.5×5.3	20	2 920 (1 700)	7 250 11 200	5 750 8 850	9 100 16 900	45.5 84.5	24.5 77	196 470	20.5 64.5	165 395	0.17 0.26	1.4
60	6×9.5×8.5	20	3 960 (3 500)	10 600 15 600	8 400 12 400	13 400 23 500	91.5 160	46.5 133	330 755	39 111	279 630	0.24 0.35	2.3
60	7×11×9	20	3 960 (3 500)	17 700 26 100	14 000 20 700	20 800 36 500	164 286	91 258	655 1 470	76 217	550 1 230	0.44 0.66	3.1
80	7×11×9	20	4 000 (3 500)	24 700 38 000	19 600 30 000	29 600 55 000	282 520	139 435	1 080 2 650	116 365	905 2 220	0.76 1.2	4.8
80	9×14×12	20	4 000 (3 500)	34 500 52 500	27 300 42 000	40 000 74 500	465 865	220 695	1 670 4 000	185 580	1 400 3 350	1.2 1.7	7

3) The basic load rating comply with the ISO standard, (ISO14728-1 and ISO14728-2).
C50: the basic dynamic load rating for 50 km rating fatigue life, C100: the basic dynamic load rating for 100 km rating fatigue life
*) Standard rail mounting bolt hole for NS15 is specified as hole for M3 (3.5 x 6 x 4.5).
Please contact NSK to request a different hole for M4 (4.5 x 7.5 x 5.3).

Worldwide Sales Offices

P: Phone ☆: Head Office

NSK LTD. HEADQUARTERS, TOKYO JAPAN

INDUSTRIAL MACHINERY BUSINESS DIVISION-HEADQUARTERS P: +81-3-3779-7227
AUTOMOTIVE BUSINESS DIVISION-HEADQUARTERS P: +81-3-3779-7189

Africa

South Africa:

NSK SOUTH AFRICA (PTY) LTD.

JOHANNESBURG P: +27-11-458-3600

Aisia and Oceania

Australia:

NSK AUSTRALIA PTY. LTD.

MELBOURNE ☆ P: +61-3-9765-4400
SYDNEY P: +61-2-8843-8100
BRISBANE P: +61-7-3347-2600
PERTH P: +61-8-9256-5000

New Zealand:

NSK NEW ZEALAND LTD.

AUCKLAND P: +64-9-276-4992

China:

NSK HONG KONG LTD.

HONG KONG ☆ P: +852-2739-9933
SHENZHEN P: +86-755-25904886

NSK (SHANGHAI) TRADING CO., LTD.

JIANGSU P: +86-512-5796-3000

NSK (CHINA) INVESTMENT CO., LTD.

JIANGSU ☆ P: +86-512-5796-3000
BEIJING P: +86-10-6590-8161
TIAN JIN P: +86-22-8319-5030
CHANGCHUN P: +86-431-8898-8682
SHENYANG P: +86-24-2334-2868
DALIAN P: +86-411-8800-8168
NANJING P: +86-25-8472-6671
FUZHOU P: +86-591-8380-1030
WUHAN P: +86-27-8556-9630
QINGDAO P: +86-532-5568-3877
GUANGZHOU P: +86-20-3817-7800
CHANGSHA P: +86-731-8571-3100
LUOYANG P: +86-379-6069-6188
XI'AN P: +86-29-8765-1896
CHONGQING P: +86-23-6806-5310
CHENGDU P: +86-28-8528-3680

NSK CHINA SALES CO., LTD.

JIANGSU P: +86-512-5796-3000

India:

NSK INDIA SALES CO.PVT.LTD.

CHENNAI ☆ P: +91-44-2847-9600
GURGAON P: +91-124-4104-530
MUMBAI P: +91-22-2838-7787

Indonesia:

PT. NSK INDONESIA

JAKARTA P: +62-21-252-3458

Korea:

NSK KOREA CO., LTD.

SEOUL P: +82-2-3287-0300

Malaysia:

NSK BEARINGS (MALAYSIA) SDN.BHD.

SHAH ALAM ☆ P: +60-3-7803-8859
PRAI P: +60-4-3902275
JOHOR BAHRU P: +60-7-3546290
IPOH P: +60-5-2555000

Philippines:

NSK REPRESENTATIVE OFFICE

MANILA P: +63-2-893-9543

Singapore:

NSK INTERNATIONAL (SINGAPORE) PTE LTD.

SINGAPORE P: +65-6496-8000

NSK SINGAPORE (PRIVATE) LTD.

SINGAPORE P: +65-6496-8000

Taiwan:

TAIWAN NSK PRECISION CO., LTD.

TAIPEI ☆ P: +886-2-2509-3305
TAICHUNG P: +886-4-2708-3393
TAINAN P: +886-6-505-5861

TAIWAN NSK TECHNOLOGY CO., LTD.

TAIPEI ☆ P: +886-2-2509-3305
TAICHUNG P: +886-4-2358-2945
TAINAN P: +886-6-505-5861

Thailand:

NSK BEARINGS (THAILAND) CO., LTD.

BANGKOK P: +66-2320-2555

Vietnam:

NSK VIETNAM CO., LTD.

HANOI P: +84-4-3955-0159

NSK REPRESENTATIVE OFFICE

HO CHI MINH CITY P: +84-8-3822-7907

Europe

United Kingdom:

NSK EUROPE LTD. (EUROPEAN HEADQUARTERS)

MAIDENHEAD P: +44-1628-509-800

NSK UK LTD.

NEWARK P: +44-1636-605-123

France:

NSK FRANCE S.A.S.

PARIS P: +33-1-30-57-39-39

Germany:

NSK DEUTSCHLAND GMBH

DUSSELDORF ☆ P: +49-2102-4810
STUTTGART P: +49-711-79082-0
WOLFSBURG P: +49-5361-27647-10

Italy:

NSK ITALIA S.P.A.

MILANO P: +39-299-5191

Netherlands:

NSK EUROPEAN DISTRIBUTION CENTRE B.V.

TILBURG P: +31-13-4647647

Poland:

NSK REPRESENTATIVE OFFICE

WARSAW P: +48-22-645-1525

Russia:

NSK POLSKA SP. Z O.O.

SAINT-PETERSBURG P: +7-812-332-5071

Spain:

NSK SPAIN S.A.

BARCELONA P: +34-93-433-5775

Turkey:

NSK RULMANLARI ORTA DOGU TIC. LTD. STI.

ISTANBUL P: +90-216-477-7111

UAE:

NSK BEARINGS GULF TRADING CO.

DUBAI P: +971-4-804-8200

North and South America

United States of America:

NSK AMERICAS, INC. (AMERICAN HEADQUARTERS)

ANN ARBOR P: +1-734-913-7500

NSK CORPORATION

ANN ARBOR P: +1-734-913-7500

NSK PRECISION AMERICA, INC.

FRANKLIN ☆ P: +1-317-738-5000
SAN JOSE P: +1-408-944-9400

NSK LATIN AMERICA, INC.

MIAMI P: +1-305-477-0605

Canada:

NSK CANADA INC.

TORONTO ☆ P: +1-905-890-0740
MONTREAL P: +1-514-633-1220
VANCOUVER P: +1-877-994-6675

Argentina:

NSK ARGENTINA SRL

BUENOS AIRES P: +54-11-4704-5100

Brazil:

NSK BRASIL LTDA.

SAO PAULO ☆ P: +55-11-3269-4786
BELO HORIZONTE P: +55-31-3274-2591
JOINVILLE P: +55-47-3422-5445
PORTO ALEGRE P: +55-51-3222-1324
RECIFE P: +55-81-3326-3781

Peru:

NSK PERU S.A.C.

LIMA P: +51-1-652-3372

Mexico:

NSK RODAMIENTOS MEXICANA, S.A. DE C.V.

MEXICO CITY ☆ P: +52-55-3682-2900
MONTERREY P: +52-81-8000-7300

<As of March 2014>

For the latest information, please refer to the NSK website.

www.nsk.com

NSK Ltd. has a basic policy not to export any products or technology designated as controlled items by export-related laws. When exporting the products in this brochure, the laws of the exporting country must be observed. Specifications are subject to change without notice and without any obligation on the part of the manufacturer. Every care has been taken to ensure the accuracy of the data contained in this brochure, but no liability can be accepted for any loss or damage suffered through errors or omissions. We will gratefully acknowledge any additions or corrections.

For more information about NSK products, please contact: _____

