


**T_{aper}
B_{ore}** *V-pulleys*


BS3790 - 1981

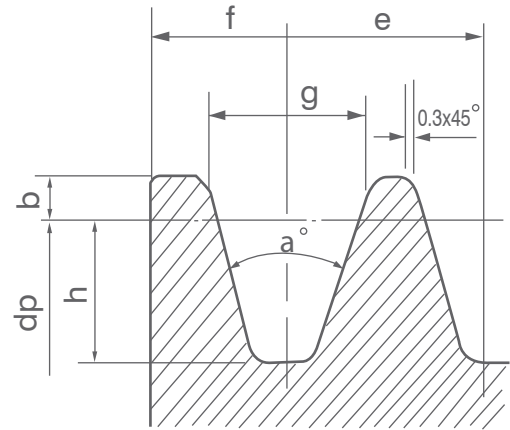

SPZ - SPA - SPB - SPC


SELECTION	PD(mm)	a°	f	e	g	h	b
Z-SPZ	≤80	34	8	12	9.7	9	2
	>80	38			9.9		
A-SPA	≤118	34	10	15	12.7	11	2.75
	>118	38			12.9		
B-SPB	≤190	34	12.5	19	16.1	14	3.5
	>190	38			16.4		
C-SPC	≤315	34	17	25.5	21.9	19	4.8
	>315	38			22.3		

SELECTION FOR STOCK V-BELT PULLEYS

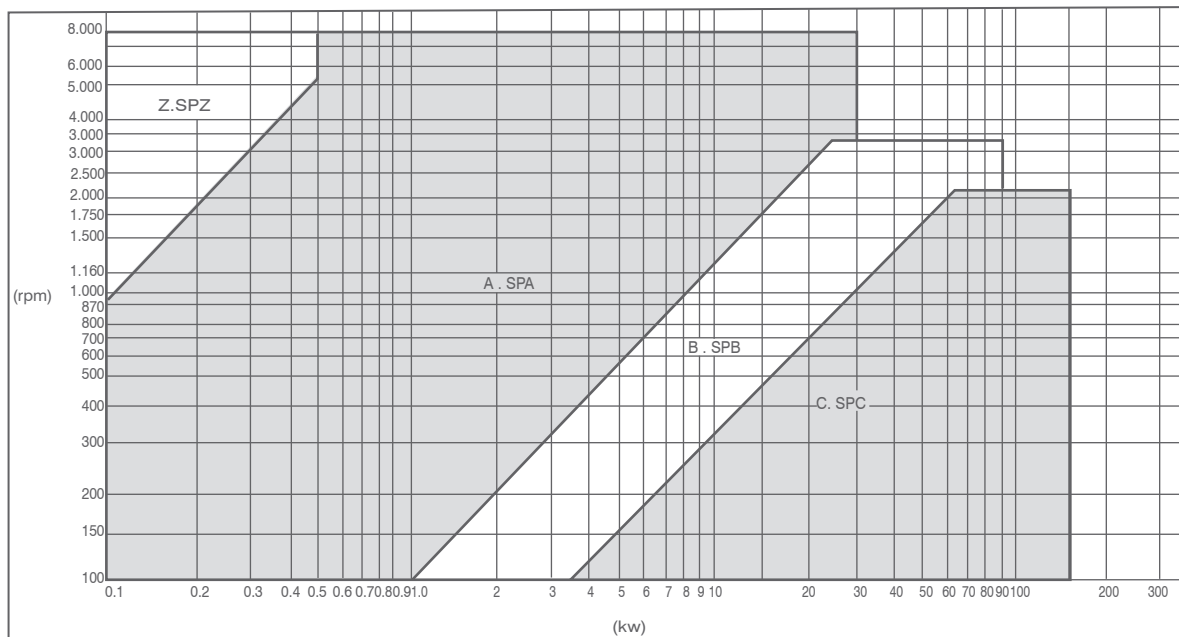

Taper Bore V-pulleys


SPZ-1

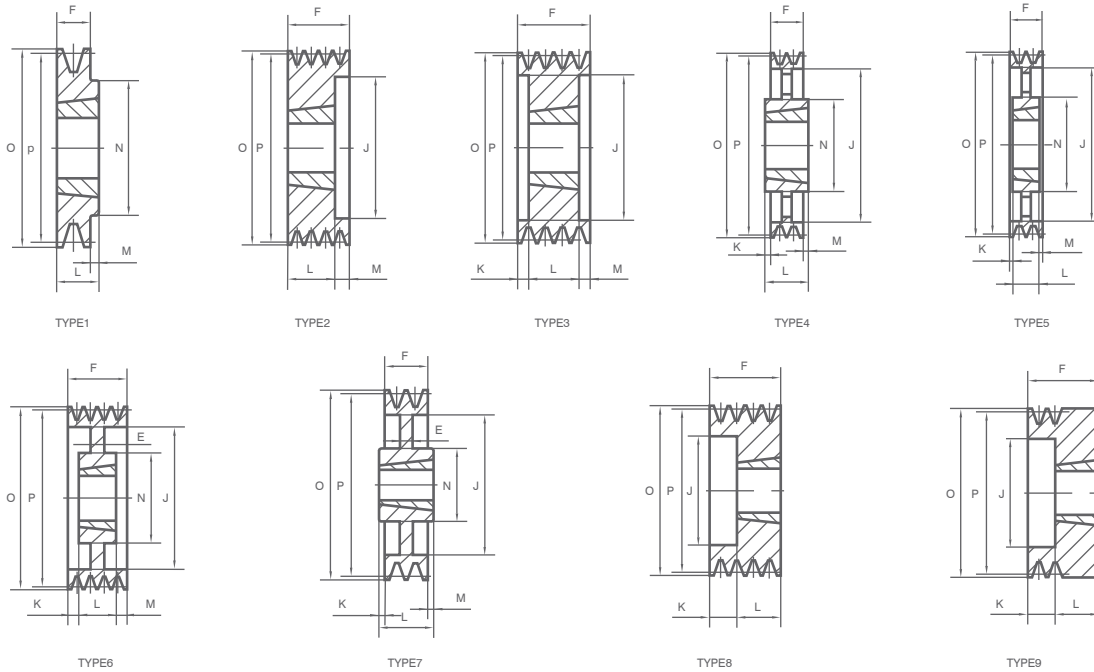

PART NO.	NO.OF GROOVES	RD	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
1SPZ050MM	1	50.0	54.0	9	1008	25	-	37	28	15	22	-	-
1SPZ056MM	1	56.0	60.0	9	1008	25	-	37	33	15	22	-	-
1SPZ060MM	1	60.0	64.0	9	1008	25	-	22	-	-	22	-	-
1SPZ063MM	1	63.0	67.0	1	1108	28	-	16	-	-	22	6	62
1SPZ067MM	1	67.0	71.0	1	1108	28	-	16	-	-	22	6	62
1SPZ071MM	1	71.0	75.0	1	1108	28	-	16	-	-	22	6	62
1SPZ075MM	1	75.0	79.0	1	1108	28	-	16	-	-	22	6	62
1SPZ080MM	1	80.0	84.0	1	1210	32	-	16	-	-	25	9	75
1SPZ085MM	1	85.0	89.0	1	1210	32	-	16	-	-	25	9	75
1SPZ090MM	1	90.0	94.0	1	1210	32	-	16	-	-	25	-	75
1SPZ095MM	1	95.0	99.0	1	1210	32	-	16	-	-	25	9	75
1SPZ100MM	1	100.0	104.0	1	1210	32	-	16	-	-	25	9	75
1SPZ106MM	1	106.0	110.0	1	1610	42	-	16	-	-	25	9	80
1SPZ112MM	1	112.0	116.0	1	1610	42	-	16	-	-	25	9	80
1SPZ118MM	1	118.0	122.0	1	1610	42	-	16	-	-	25	9	80
1SPZ125MM	1	125.0	129.0	1	1610	42	-	16	-	-	25	9	80
1SPZ132MM	1	132.0	136.0	1	1610	42	-	16	-	-	25	9	80
1SPZ140MM	1	140.0	144.0	1	1610	42	-	16	-	-	25	9	80
1SPZ150MM	1	150.0	154.0	1	1610	42	-	16	-	-	25	9	80
1SPZ160MM	1	160.0	164.0	1	1610	42	-	16	-	-	25	9	80
1SPZ170MM	1	170.0	174.0	1	1610	42	-	16	-	-	25	9	80
1SPZ180MM	1	180.0	184.0	1	1610	42	-	16	-	-	25	9	80
1SPZ190MM	1	190.0	194.0	7	1610	42	-	16	161	-	25	9	80
1SPZ200MM	1	200.0	204.0	7	2012	50	-	16	172	-	32	16	100
1SPZ224MM	1	224.0	228.0	7	2012	50	15	16	196	-	32	16	100
1SPZ250MM	1	250.0	254.0	4	2012	50	-	16	222	8	32	8	100
1SPZ280MM	1	280.0	284.0	4	2012	50	-	16	252	8	32	8	100
1SPZ315MM	1	315.0	319.0	4	2012	50	-	1	287	8	32	8	100
1SPZ355MM	1	355.0	359.0	4	2012	50	-	16	326	8	32	8	112
1SPZ400MM	1	400.0	404.0	4	2012	50	-	16	371	8	32	8	112
1SPZ450MM	1	450.0	454.0	4	2517	60	-	16	421	14.5	45	14.5	120

Taper Bore V-pulleys


SPZ-2

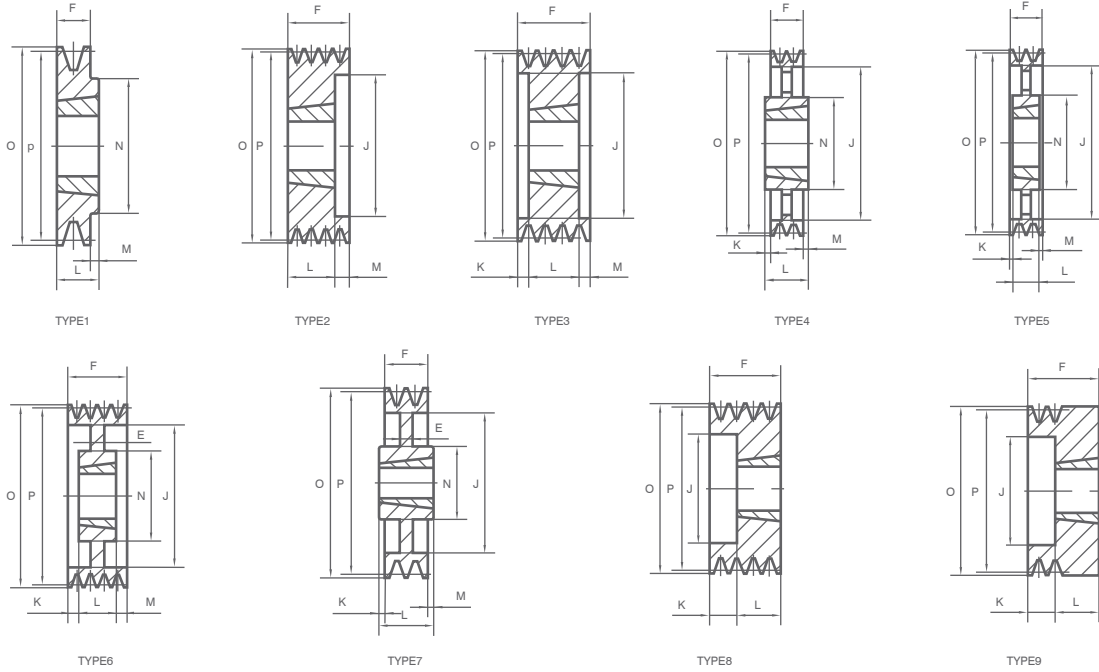

PART NO.	NO.OF GROOVES	R.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
2SPZX050MM	2	50.0	54.0	9	1008	25	-	49	28	27	22	-	-
2SPZX056MM	2	56.0	60.0	9	1108	28	-	49	35	27	22	-	-
2SPZX060MM	2	60.0	64.0	9	1108	28	-	49	36	27	22	-	-
2SPZX063MM	2	63.0	67.0	8	1108	28	-	28	40	6	22	-	-
2SPZX067MM	2	67.0	71.0	8	1108	28	-	28	42	6	22	-	-
2SPZX071MM	2	71.0	75.0	8	1108	28	-	28	42	6	22	-	-
2SPZX075MM	2	75.0	79.0	8	1210	32	-	28	51	3	25	-	-
2SPZX080MM	2	80.0	84.0	8	1210	32	-	28	51	3	25	-	-
2SPZX085MM	2	85.0	89.0	8	1610	42	-	28	60	3	25	-	-
2SPZX090MM	2	90.0	94.0	8	1610	42	-	28	61	3	25	-	-
2SPZX095MM	2	95.0	99.0	8	1610	42	-	28	66	3	25	-	-
2SPZX100MM	2	100.0	104.0	8	1610	42	-	28	71	3	25	-	-
2SPZX106MM	2	106.0	110.0	8	1610	42	-	28	76	3	25	-	-
2SPZX112MM	2	112.0	116.0	8	1610	42	-	28	84	3	25	-	-
2SPZX118MM	2	118.0	122.0	8	1610	42	-	28	90	3	25	-	-
2SPZX125MM	2	125.0	129.0	8	1610	42	-	28	97	3	25	-	-
2SPZX132MM	2	132.0	136.0	8	1610	42	-	28	104	3	25	-	-
2SPZX140MM	2	140.0	146.0	8	1610	42	-	28	112	3	25	-	-
2SPZX150MM	2	150.0	154.0	1	2012	50	-	28	-	-	32	4	100
2SPZX160MM	2	160.0	164.0	1	2012	50	-	28	-	-	32	4	100
2SPZX170MM	2	170.0	174.0	1	2012	50	-	28	-	-	32	4	100
2SPZX180MM	2	180.0	184.0	7	2012	50	10	28	152	-	32	4	100
2SPZX190MM	2	190.0	194.0	7	2012	50	10	28	161	-	32	4	100
2SPZX200MM	2	200.0	204.0	7	2012	50	10	28	171	-	32	4	100
2SPZX224MM	2	224.0	228.0	7	2012	50	10	28	196	-	32	4	100
2SPZX250MM	2	250.0	254.0	4	2012	50	-	28	222	2	32	2	100
2SPZX280MM	2	280.0	284.0	4	2012	50	-	28	252	2	32	2	100
2SPZX315MM	2	315.0	319.0	4	2012	50	-	28	286	2	32	2	100
2SPZX355MM	2	355.0	359.0	4	2012	50	-	28	326	2	32	2	112
2SPZX400MM	2	400.0	404.0	4	2517	50	-	28	371	8.5	45	8.5	120
2SPZX450MM	2	450.0	454.0	4	2517	60	-	28	421	8.5	45	8.5	120

Taper Bore V-pulleys


SPZ-3

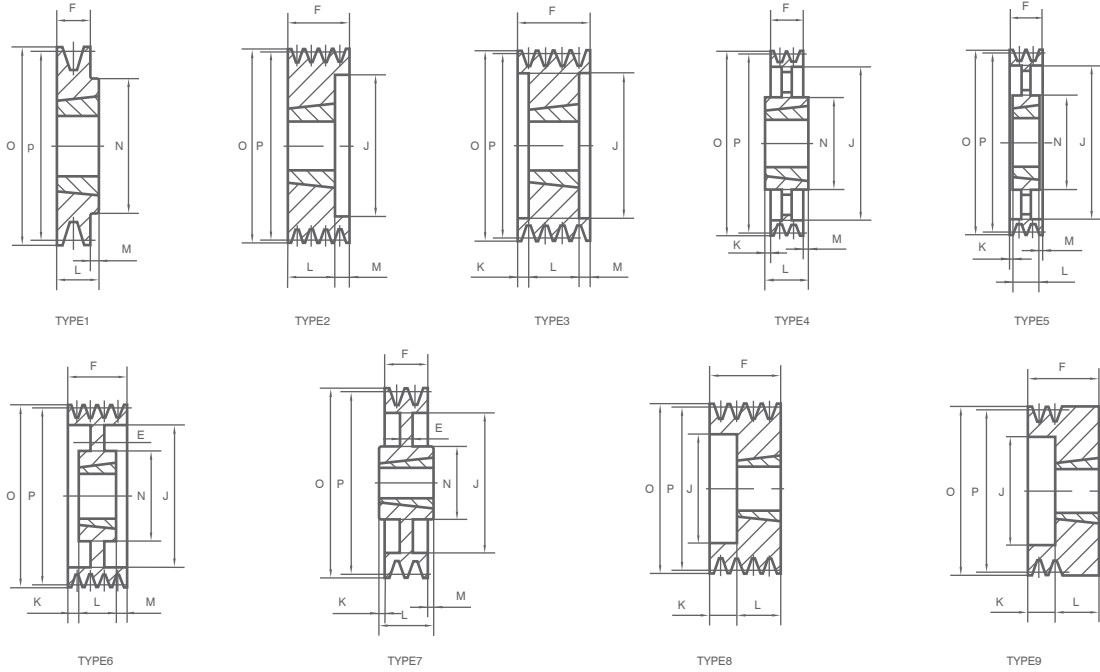

PART NO.	NO.OF GROOVES	RD	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
3SPZX063MM	3	63.0	67.0	8	1108	28	-	40	40	18	22	-	-
3SPZX067MM	3	67.0	71.0	8	1108	28	-	40	42	18	22	-	-
3SPZX071MM	3	71.0	75.0	8	1108	28	-	40	42	18	22	-	-
3SPZX075MM	3	75.0	79.0	8	1210	32	-	40	48	15	25	-	-
3SPZX080MM	3	80.0	84.0	8	1210	32	-	40	51	15	25	-	-
3SPZX085MM	3	85.0	89.0	8	1610	42	-	40	60	15	25	-	-
3SPZX090MM	3	90.0	94.0	8	1610	42	-	40	61	15	25	-	-
3SPZX095MM	3	95.0	99.0	8	1610	42	-	40	66	15	25	-	-
3SPZX100MM	3	100.0	104.0	8	1610	42	-	40	71	15	25	-	-
3SPZX106MM	3	106.0	110.0	8	1610	42	-	40	78	15	25	-	-
3SPZX112MM	3	112.0	116.0	8	2012	50	-	40	84	8	32	-	-
3SPZX118MM	3	118.0	122.0	8	2012	50	-	40	92	8	32	-	-
3SPZX125MM	3	125.0	129.0	2	2012	50	-	40	97	-	32	8	-
3SPZX132MM	3	132.0	136.0	2	2012	50	-	40	104	-	32	8	-
3SPZX140MM	3	140.0	144.0	2	2012	50	-	40	112	-	32	8	-
3SPZX150MM	3	150.0	154.0	2	2012	50	-	40	122	-	32	8	-
3SPZX160MM	3	160.0	164.0	2	2012	50	-	40	132	-	32	8	-
3SPZX170MM	3	170.0	174.0	2	2012	50	-	40	141	-	32	8	-
3SPZX180MM	3	180.0	184.0	2	2012	50	-	40	152	-	32	8	-
3SPZX190MM	3	190.0	194.0	6	2012	50	20	40	161	4	32	4	100
3SPZX200MM	3	200.0	204.0	6	2012	50	20	40	172	4	32	4	100
3SPZX224MM	3	224.0	228.0	6	2012	50	20	40	196	4	32	4	100
3SPZX250MM	3	250.0	254.0	5	2012	50	-	40	222	4	32	4	100
3SPZX280MM	3	280.0	284.0	4	2517	50	-	40	252	2.5	45	2.5	120
3SPZX315MM	3	315.0	319.0	4	2517	50	-	40	287	2.5	45	2.5	120
3SPZX355MM	3	355.0	359.0	4	2517	60	-	40	326	2.5	45	2.5	120
3SPZX400MM	3	400.0	404.0	4	2517	60	-	40	371	2.5	45	2.5	120
3SPZX450MM	3	450.0	454.0	4	2517	60	-	40	421	2.5	45	2.5	120
3SPZX500MM	3	500.0	504.0	4	2517	60	-	40	471	2.5	45	2.5	120
3SPZX630MM	3	630.0	634.0	4	2517	60	-	40	601	2.5	45	2.5	120
3SPZX800MM	3	800.0	804.0	4	3020	75	-	40	771	2.5	51	5.5	150

Taper Bore V-pulleys


SPZ-4

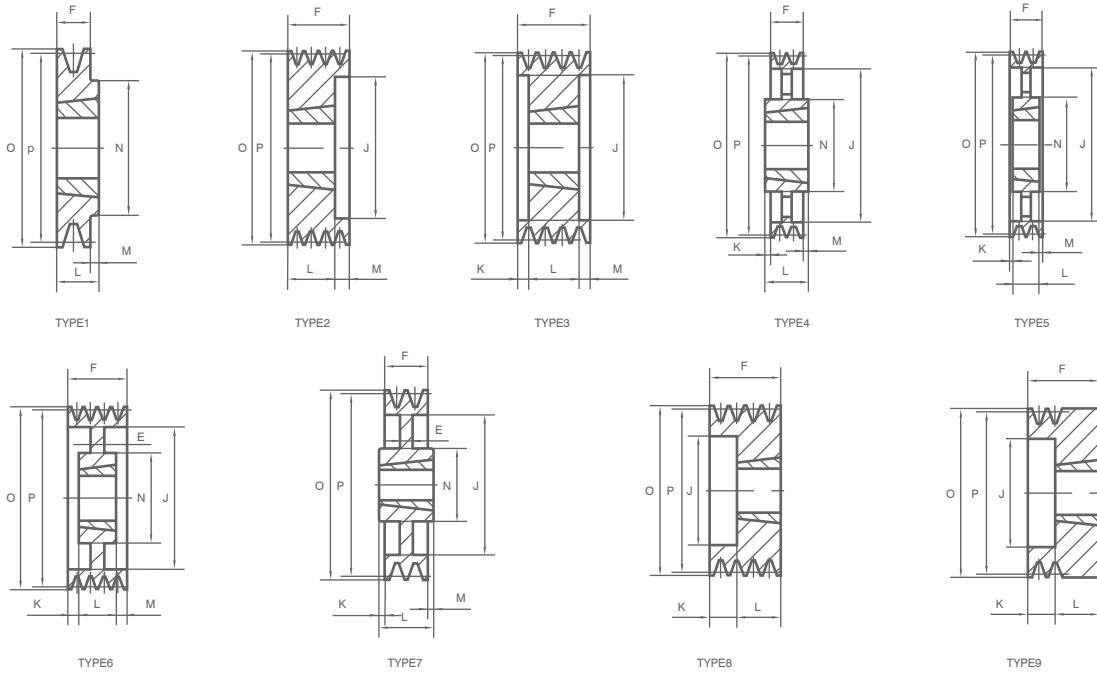

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
4SPZX080MM	4	80.0	84.0	8	1210	32	-	52	51	27	25	-	-
4SPZX085MM	4	85.0	89.0	8	1610	42	-	52	60	27	25	-	-
4SPZX090MM	4	90.0	94.0	8	1610	42	-	52	61	27	25	-	-
4SPZX095MM	4	95.0	99.0	8	1610	42	-	52	66	27	25	-	-
4SPZX100MM	4	100.0	104.0	8	1610	42	-	52	72	27	25	-	-
4SPZX106MM	4	106.0	110.0	8	1610	42	-	52	80	27	25	-	-
4SPZX112MM	4	112.0	116.0	8	2012	50	-	52	86	20	32	-	-
4SPZX118MM	4	118.0	122.0	8	2012	50	-	52	92	20	32	-	-
4SPZX125MM	4	125.0	129.0	2	2012	50	-	52	99	20	32	20	-
4SPZX132MM	4	132.0	136.0	2	2012	50	-	52	104	20	32	20	-
4SPZX140MM	4	140.0	144.0	2	2012	50	-	52	112	7	32	20	-
4SPZX150MM	4	150.0	154.0	2	2517	60	-	52	122	7	45	7	-
4SPZX160MM	4	160.0	164.0	2	2517	60	-	52	132	-	45	7	-
4SPZX170MM	4	170.0	174.0	2	2517	60	-	52	141	-	45	7	-
4SPZX180MM	4	180.0	184.0	2	2517	60	-	52	152	-	45	7	-
4SPZX190MM	4	190.0	194.0	6	2517	60	10	52	161	3.5	45	3.5	120
4SPZX200MM	4	200.0	204.0	6	2517	60	10	52	172	3.5	45	3.5	120
4SPZX224MM	4	224.0	228.0	6	2517	60	10	52	196	3.5	45	3.5	120
4SPZX250MM	4	250.0	254.0	5	2517	60	-	52	222	3.5	45	3.5	120
4SPZX280MM	4	280.0	284.0	5	2517	60	-	52	252	3.5	45	3.5	120
4SPZX315MM	4	315.0	319.0	5	2517	60	-	52	287	3.5	45	3.5	120
4SPZX355MM	4	355.0	359.0	5	2517	60	-	52	326	3.5	45	3.5	120
4SPZX400MM	4	400.0	404.0	5	2517	60	-	52	371	3.5	45	3.5	120
4SPZX450MM	4	450.0	454.0	5	3020	75	-	52	421	0.5	51	0.5	150
4SPZX500MM	4	500.0	504.0	5	3020	75	-	52	471	0.5	51	0.5	150
4SPZX630MM	4	630	634.0	4	3030	75	-	52	601-	12	76	12	150
4SPZX800MM	4	800.0	804.0	4	3030	75	-	52	771	12	76	12	150

Taper Bore V-pulleys


SPZ-5

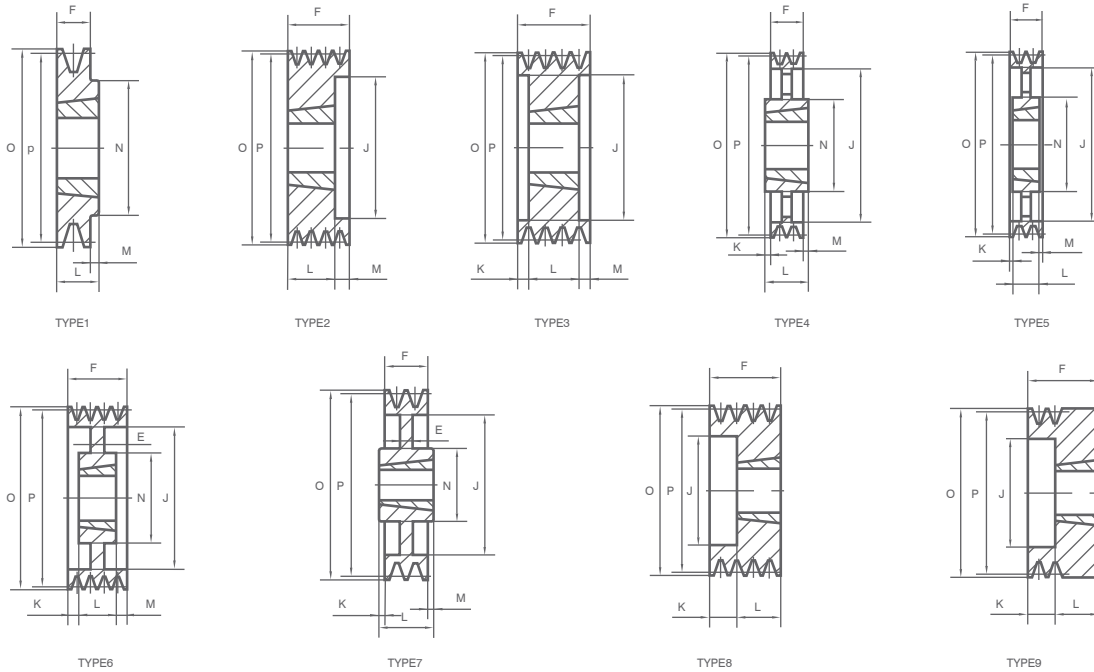

PART NO.	NO.OF GROOVES	R.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
5SPZX085MM	5	85.0	89.0	8	1610	42	-	64	60	39	25	-	-
5SPZX090MM	5	90.0	94.0	8	1610	42	-	64	61	39	25	-	-
5SPZX095MM	5	95.0	99.0	8	1610	42	-	64	66	39	25	-	-
5SPZX100MM	5	100.0	104.0	8	2012	50	-	64	72	32	32	-	-
5SPZX106MM	5	106.0	110.0	8	2012	50	-	64	78	32	32	-	-
5SPZX112MM	5	112.0	116.0	8	2012	50	-	64	84	32	32	-	-
5SPZX118MM	5	118.0	122.0	8	2012	50	-	64	90	32	32	-	-
5SPZX125MM	5	125.0	129.0	8	2012	50	-	64	97	32	32	-	-
5SPZX132MM	5	132.0	136.0	8	2517	60	-	64	104	19	45	-	-
5SPZX140MM	5	140.0	144.0	2	2517	60	-	64	112	-	45	19	-
5SPZX150MM	5	150.0	154.0	2	2517	60	-	64	122	-	45	19	-
5SPZX160MM	5	160.0	164.0	2	2517	60	-	64	132	-	45	19	-
5SPZX170MM	5	170.0	174.0	2	2517	60	-	64	141	-	45	19	-
5SPZX180MM	5	180.0	184.0	2	2517	60	-	64	152	-	45	19	-
5SPZX190MM	5	190.0	194.0	6	2517	60	10	64	161	9.5	45	9.5	120
5SPZX200MM	5	200.0	204.0	6	2517	60	10	64	172	9.5	45	9.5	120
5SPZX224MM	5	224.0	228.0	6	2517	60	10	64	196	9.5	45	9.5	120
5SPZX250MM	5	250.0	254.0	5	2517	60	-	64	222	9.5	45	9.5	120
5SPZX280MM	5	280.0	284.0	5	2517	60	-	64	252	9.5	45	9.5	120
5SPZX315MM	5	315.0	319.0	5	2517	60	-	64	287	9.5	45	9.5	120
5SPZX355MM	5	355.0	359.0	5	2517	60	-	64	326	9.5	45	9.5	120
5SPZX400MM	5	400.0	404.0	5	3020	75	-	64	371	6.5	51	6.5	150
5SPZX450MM	5	450.0	454.0	5	3020	75	-	64	421	6.5	51	6.5	150
5SPZX500MM	5	500.0	504.0	4	3030	75	-	64	471	6	76	6	150
5SPZX630MM	5	630.0	634.0	4	3030	75	-	64	601	6	76	6	150
5SPZX800MM	5	800.0	804.0	4	3535	90	-	64	771	12.5	89	12.5	170

Taper Bore V-pulleys


SPZ-6

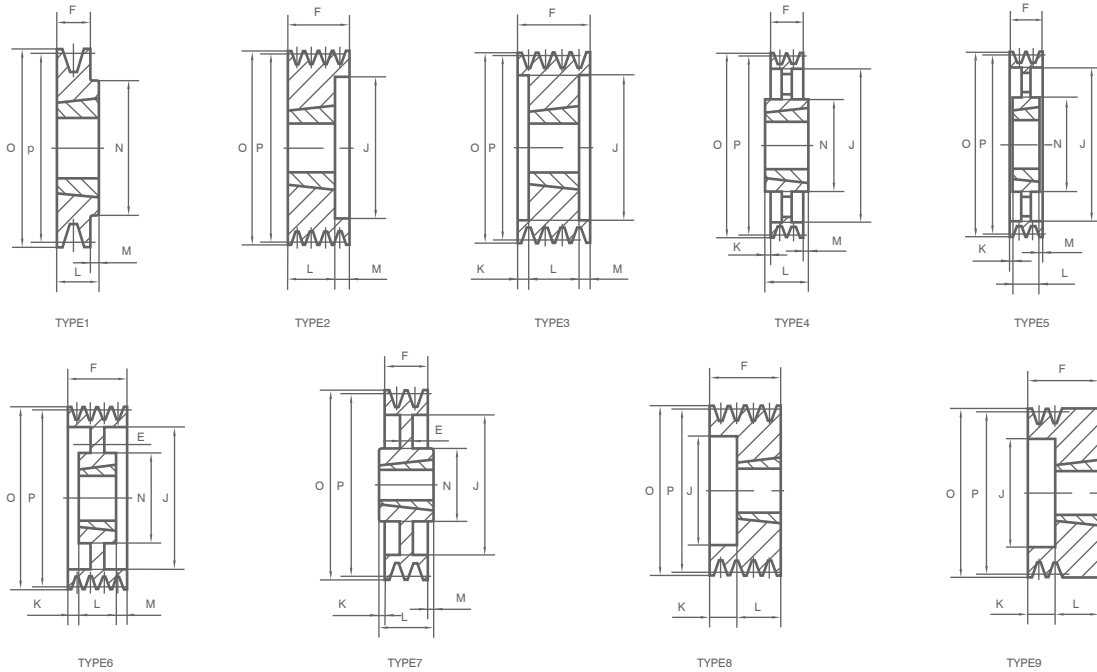

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
6SPZX090MM	6	90.0	94.0	8	1610	42	-	76	61	51	25	-	-
6SPZX095MM	6	95.0	99.0	8	1610	42	-	76	66	51	25	-	-
6SPZX100MM	6	100.0	104.0	8	2012	50	-	76	72	44	32	-	-
6SPZX106MM	6	106.0	110.0	8	2012	50	-	76	78	44	32	-	-
6SPZX112MM	6	112.0	116.0	8	2012	50	-	76	84	44	32	-	-
6SPZX118MM	6	118.0	122.0	8	2517	60	-	76	90	31	45	-	-
6SPZX125MM	6	125.0	129.0	8	2517	60	-	76	97	31	45	-	-
6SPZX132MM	6	132.0	136.0	8	2517	60	-	76	104	31	45	-	-
6SPZX140MM	6	140.0	146.0	2	2517	60	-	76	112	-	45	31	-
6SPZX150MM	6	150.0	154.0	2	2517	60	-	76	122	-	45	31	-
6SPZX160MM	6	160.0	164.0	2	2517	60	-	76	132	-	45	31	-
6SPZX170MM	6	170.0	174.0	2	2517	60	-	76	141	-	45	31	-
6SPZX180MM	6	180.0	184.0	2	2517	60	-	76	152	-	45	31	-
6SPZX190MM	6	190	194.0	6	2517	60	10	76	161	15.0	45	15.5	120
6SPZX200MM	6	200.0	204.0	6	2517	60	10	76	172	15.0	45	15.5	120
6SPZX224MM	6	224.0	228.0	6	2517	60	10	76	196	15.5	45	15.5	120
6SPZX250MM	6	250.0	254.0	5	2517	60	-	76	222	15.5	45	15.5	120
6SPZX280MM	6	280.0	284.0	5	2517	60	-	76	252	15.5	45	15.5	120
6SPZX315MM	6	315.0	319.0	5	2517	60	-	76	287	15.5	45	15.5	120
6SPZX355MM	6	355.0	359.0	5	2517	60	-	76	326	15.5	45	15.5	125
6SPZX400MM	6	400.0	404.0	5	3030	75	-	76	371	-	76	-	150
6SPZX450MM	6	450.0	454.0	5	3030	75	-	76	421	-	76	-	150
6SPZX500MM	6	500.0	504.0	5	3030	75	-	76	471	-	76	-	150
6SPZX630MM	6	630.0	634.0	4	3535	90	-	76	601	6.5	89	6.5	170
6SPZX800MM	6	800.0	804.0	4	3535	90	-	76	771	6.5	89	6.5	170

Taper Bore V-pulleys

SPZ-8

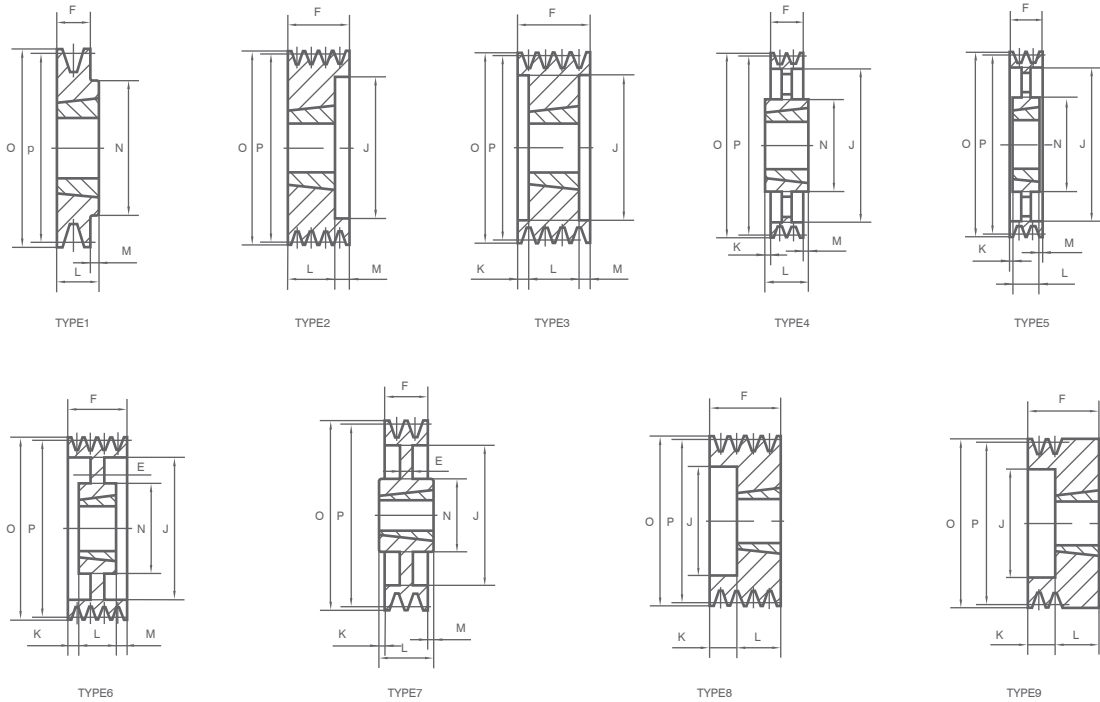


PART NO.	NO.OF GROOVES	PD	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
8SPZX140MM	8	140.0	144.0	3	2517	60	-	100	112	27.5	45	27.5	-
8SPZX150MM	8	150.0	154.0	3	2517	60	-	100	122	27.5	45	27.5	-
8SPZX160MM	8	160.0	164.0	3	2517	60	-	100	132	27.5	45	27.5	-
8SPZX180MM	8	180.0	184.0	3	2517	60	-	100	152	27.5	45	27.5	-
8SPZX200MM	8	200.0	204.0	3	3020	75	-	100	171	24.5	51	24.5	-
8SPZX224MM	8	224.0	228.0	3	3020	75	-	100	195	24.5	51	24.5	-
8SPZX250MM	8	250.0	254.0	6	3020	75	-	100	221	24.5	51	24.5	150
8SPZX280MM	8	280.0	284.0	5	3020	75	-	100	252	24.5	51	24.5	150
8SPZX355MM	8	355.0	359.0	5	3030	75	-	100	326	12	76	12	150
8SPZX400MM	8	400.0	404.0	5	3030	75	-	100	371	12	76	12	150
8SPZX450MM	8	450.0	454.0	5	3535	90	-	100	421	5.5	89	5.5	170

Standard bore dimensions of BTL bushings

Bushing	Stock Bores																							
	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	60	65	70	75	80	85	90	95	100
2517	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●								
3020				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
3030				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
3535								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Taper Bore V-pulleys


SPA-1

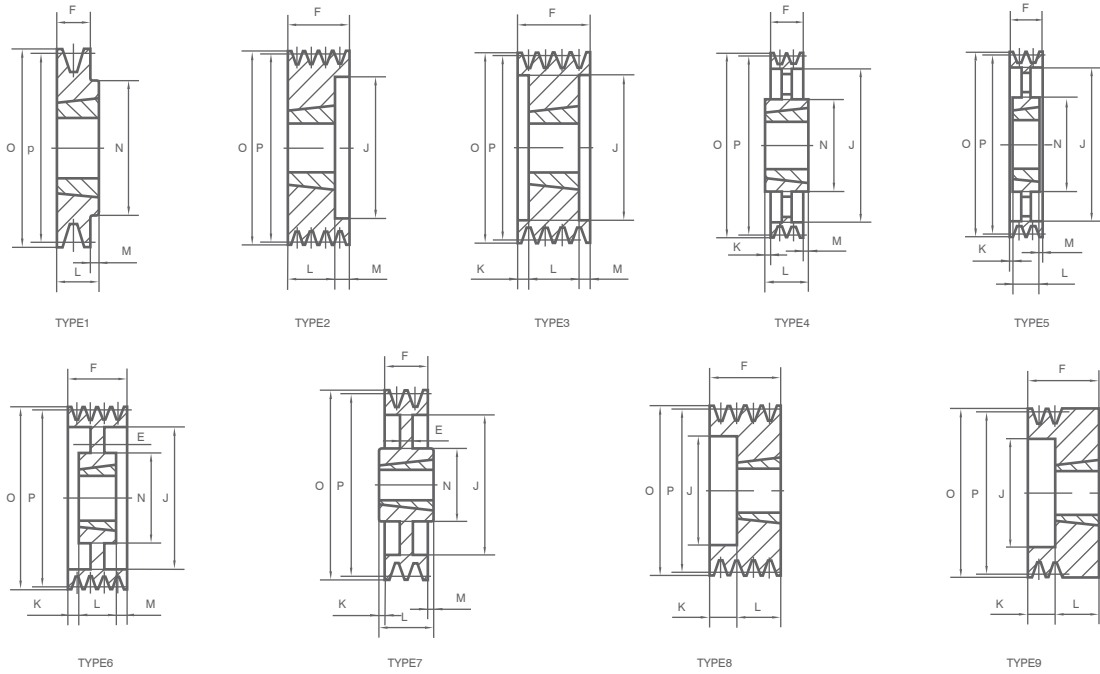

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
1SPAX063MM	1	63.0	68.5	1	1008	28	-	20	-	-	22	2	56
1SPAX067MM	1	67.0	72.5	1	1108	28	-	20	-	-	22	2	62
1SPAX071MM	1	71.0	76.5	1	1108	28	-	20	-	-	22	2	62
1SPAX075MM	1	75.0	80.5	1	1108	28	-	20	-	-	22	2	62
1SPAX080MM	1	80.0	85.5	1	1210	32	-	20	-	-	25	5	75
1SPAX085MM	1	85.0	90.5	1	1210	32	-	20	-	-	25	5	75
1SPAX090MM	1	90.0	95.5	1	1210	32	-	20	-	-	25	5	75
1SPAX095MM	1	95.0	100.5	1	1210	32	-	20	-	-	25	5	75
1SPAX100MM	1	100.0	105.5	1	1610	42	-	20	-	-	25	5	80
1SPAX106MM	1	106.0	111.5	1	1610	42	-	20	-	-	25	5	80
1SPAX112MM	1	112.0	117.5	1	1610	42	-	20	-	-	25	5	80
1SPAX118MM	1	118.0	123.5	1	1610	42	-	20	-	-	25	5	80
1SPAX125MM	1	125.0	130.5	1	1610	42	-	20	-	-	25	5	80
1SPAX132MM	1	132.0	137.5	1	1610	42	-	20	-	-	25	5	80
1SPAX140MM	1	140.0	145.5	1	1610	42	-	20	-	-	25	5	80
1SPAX150MM	1	150.0	155.5	1	1610	42	-	20	-	-	25	5	80
1SPAX160MM	1	160.0	165.5	1	1610	42	-	20	-	-	25	5	80
1SPAX170MM	1	170.0	175.5	1	1610	42	-	20	-	-	25	5	80
1SPAX180MM	1	180.0	185.5	1	1610	42	-	20	-	-	25	5	80
1SPAX190MM	1	190.0	195.5	1	1610	42	-	20	-	-	25	5	80
1SPAX200MM	1	200.0	205.5	7	2012	50	10	20	165	-	32	12	100
1SPAX224MM	1	224.0	229.5	7	2012	50	10	20	189	-	32	12	100
1SPAX250MM	1	250.0	255.5	7	2012	50	10	20	215	6	32	6	100
1SPAX280MM	1	280.0	285.5	7	2012	50	10	20	245	-	32	12	100
1SPAX315MM	1	315.0	320.5	4	2012	50	-	20	280	-	32	12	100
1SPAX355MM	1	355.0	360.5	4	2012	50	-	20	320	-	32	12	100
1SPAX400MM	1	400.0	405.5	4	2012	50	-	20	365	-	32	12	100
1SPAX450MM	1	450.0	455.5	4	2012	50	-	20	415	-	32	12	100
1SPAX500MM	1	500.0	505.5	4	2517	60	-	20	465	-	45	25	120
1SPAX630MM	1	630.0	635.5	4	2517	60	-	20	595	-	45	25	120

Taper Bore V-pulleys


SPA-2

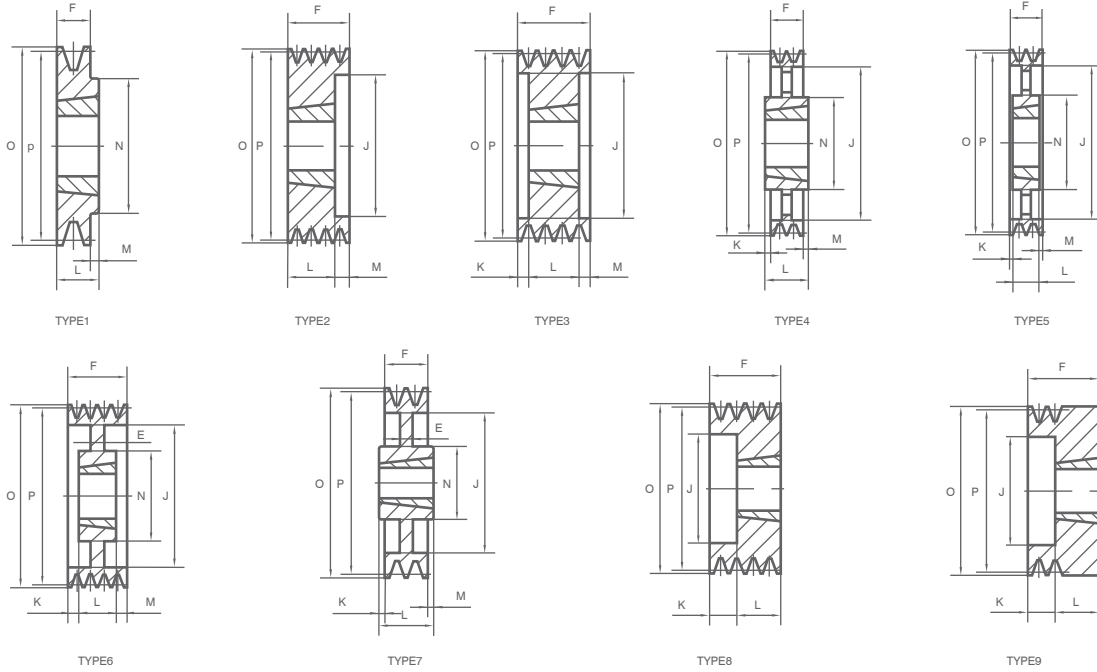

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
2SPAX063MM	2	63.0	68.5	8	1008	28	-	35	36	13	22	-	-
2SPAX067MM	2	67.0	72.5	8	1108	28	-	35	37	13	22	-	-
2SPAX071MM	2	71.0	76.5	8	1108	28	-	35	40	13	22	-	-
2SPAX075MM	2	75.0	80.5	8	1108	28	-	35	44	13	22	-	-
2SPAX080MM	2	80.0	85.5	8	1210	32	-	35	47	10	25	-	-
2SPAX085MM	2	85.0	90.5	8	1210	32	-	35	50	10	25	-	-
2SPAX090MM	2	90.0	95.5	8	1610	42	-	35	60	10	25	-	-
2SPAX095MM	2	95.0	100.5	8	1610	42	-	35	64	10	25	-	-
2SPAX100MM	2	100.0	105.5	8	1610	42	-	35	70	10	25	-	-
2SPAX106MM	2	106.0	111.5	8	1610	42	-	35	76	10	25	-	-
2SPAX112MM	2	112.0	117.5	8	1610	42	-	35	80	10	25	-	-
2SPAX118MM	2	118.0	123.5	8	1610	42	-	35	86	10	25	-	-
2SPAX125MM	2	125.0	130.5	8	1610	42	-	35	90	10	25	-	-
2SPAX132MM	2	132.0	137.5	8	2012	50	-	35	98	3	32	-	-
2SPAX140MM	2	140.0	145.5	8	2012	50	-	35	106	3	32	-	-
2SPAX150MM	2	150.0	155.5	8	2012	50	-	35	116	3	32	-	-
2SPAX160MM	2	160.0	165.5	8	2012	50	15	35	125	3	32	-	-
2SPAX170MM	2	170.0	175.5	8	2012	50	15	35	135	3	32	-	-
2SPAX180MM	2	180.0	185.5	6	2012	50	15	35	148	1.5	32	1.5	100
2SPAX190MM	2	190.0	195.5	6	2012	50	15	35	158	1.5	32	1.5	100
2SPAX200MM	2	200.0	205.5	7	2517	60	15	35	165	5	45	5	120
2SPAX224MM	2	224.0	229.5	7	2517	60	15	35	189	-	45	10	120
2SPAX250MM	2	250.0	255.5	7	2517	60	20	35	215	5	45	5	120
2SPAX280MM	2	280.0	285.5	7	2517	60	20	35	245	-	45	10	120
2SPAX315MM	2	315.0	320.5	4	2517	60	-	35	280	-	45	10	120
2SPAX355MM	2	355.0	360.5	4	2517	60	-	35	320	-	45	10	120
2SPAX400MM	2	400.0	405.5	4	2517	60	-	35	365	-	45	10	120
2SPAX500MM	2	500.0	505.5	4	2517	60	-	35	465	-	45	10	120
2SPAX560MM	2	560.0	565.5	4	3020	75	-	35	525	-	51	16	150
2SPAX630MM	2	630.0	635.5	4	3020	75	-	35	595	-	51	16	150

Taper Bore V-pulleys


SPA-3

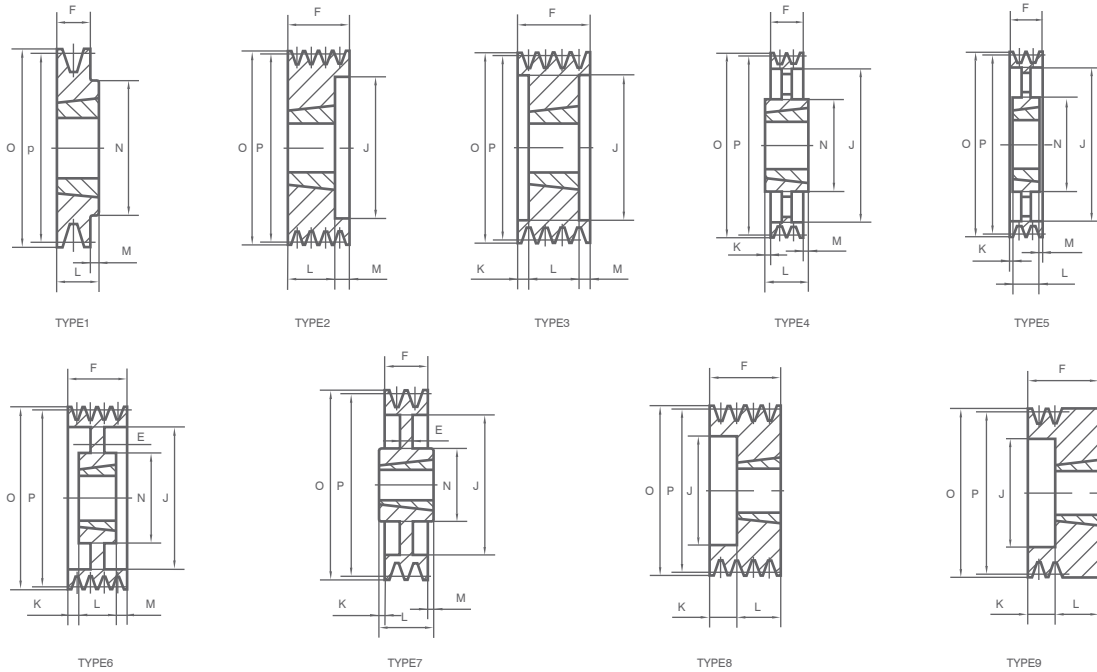

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
3SPAX071MM	3	71.0	76.5	8	1108	28	-	50	40	28	22	-	-
3SPAX075MM	3	75.0	80.5	8	1108	32	-	50	44	28	22	-	-
3SPAX080MM	3	80.0	85.5	8	1210	32	-	50	47	25	25	-	-
3SPAX085MM	3	85.0	90.5	8	1210	32	-	50	50	25	25	-	-
3SPAX090MM	3	90.0	95.5	8	1610	42	-	50	60	25	25	-	-
3SPAX095MM	3	95.0	100.5	8	1610	42	-	50	64	25	25	-	-
3SPAX100MM	3	100.0	105.5	2	1610	42	-	50	70	-	25	25	-
3SPAX106MM	3	106.0	111.5	2	1610	42	-	50	76	-	25	25	-
3SPAX112MM	3	112.0	117.5	8	2012	50	-	50	83	18	32	-	-
3SPAX118MM	3	118.0	123.5	2	2012	50	-	50	86	-	32	18	-
3SPAX125MM	3	125.0	128.5	2	2012	50	-	50	92	-	32	18	-
3SPAX132MM	3	132.0	137.5	2	2012	50	-	50	98	-	32	18	-
3SPAX140MM	3	140.0	145.5	8	2517	60	-	50	106	5	45	-	-
3SPAX150MM	3	150.0	155.5	8	2517	60	-	50	116	5	45	-	-
3SPAX160MM	3	160.0	165.5	8	2517	60	-	50	126	5	45	-	-
3SPAX170MM	3	170.0	175.5	8	2517	60	-	50	138	5	45	-	-
3SPAX180MM	3	180.0	185.5	8	2517	60	-	50	146	5	45	-	-
3SPAX190MM	3	190.0	195.5	8	2517	60	-	50	158	5	45	-	-
3SPAX200MM	3	200.0	205.5	6	2517	60	20	50	165	2.5	45	2.5	120
3SPAX224MM	3	224.0	229.5	6	2517	60	20	50	189	2.5	45	2.5	120
3SPAX250MM	3	250.0	255.5	6	2517	60	20	50	215	2.5	45	2.5	120
3SPAX280MM	3	280.0	285.5	6	2517	60	20	50	245	2.5	45	2.5	120
3SPAX315MM	3	315.0	320.5	7	3020	75	25	50	280	0.5	51	0.5	150
3SPAX355MM	3	355.0	360.5	4	3020	75	-	50	320	0.5	51	0.5	160
3SPAX400MM	3	400.0	405.5	4	3020	75	-	50	365	0.5	51	0.5	150
3SPAX450MM	3	450.0	455.5	4	3020	75	-	50	415	0.5	51	0.5	150
3SPAX500MM	3	500.0	505.5	4	3020	75	-	50	465	0.5	51	0.5	150
3SPAX560MM	3	560.0	565.5	4	3020	75	-	50	525	0.5	51	0.5	150
3SPAX630MM	3	630.0	635.5	4	3020	75	-	50	595	0.5	51	0.5	150
3SPAX800MM	3	800.0	805.5	4	3535	90	-	50	765	19.5	89	19.5	170
3SPAX1000MM	3	1000.0	1005.5	4	3535	90	-	50	965	19.5	89	19.5	178

Taper Bore V-pulleys


SPA-4

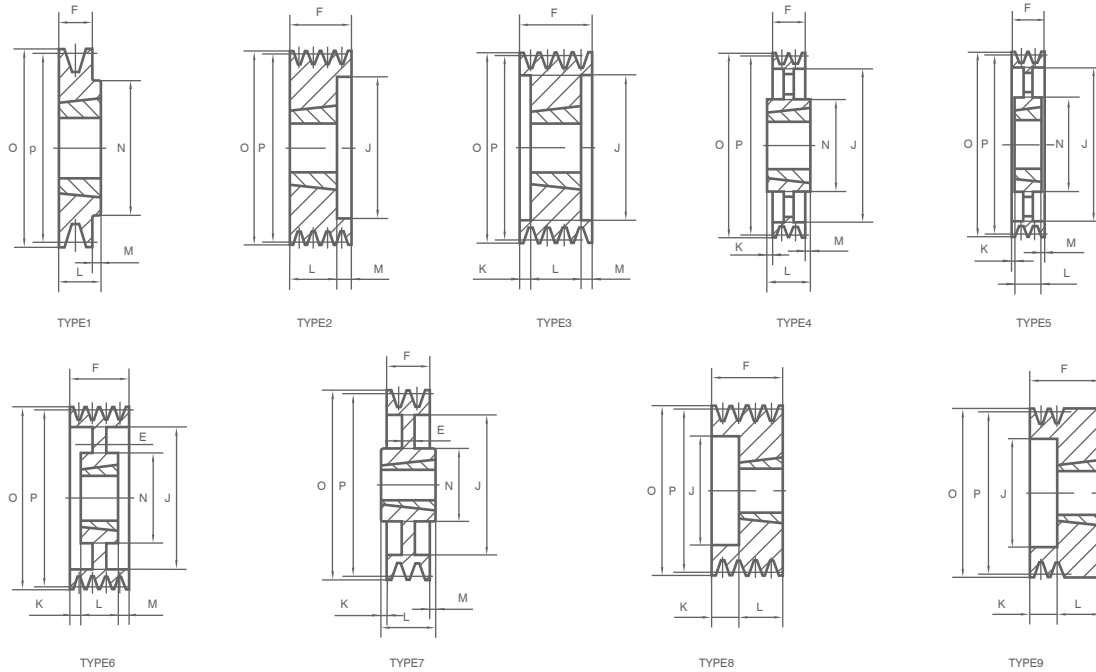

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
4SPAX090MM	4	90.0	95.5	3	1615	42	-	65	64	13.5	38	13.5	-
4SPAX095MM	4	95.0	100.5	3	1615	42	-	65	64	13.5	38	13.5	-
4SPAX100MM	4	100.0	105.5	2	1615	42	-	65	70	-	38	27	-
4SPAX106MM	4	106.0	111.5	8	2012	50	-	65	76	33	32	-	-
4SPAX112MM	4	112.0	117.5	8	2012	50	-	65	80	33	32	-	-
4SPAX118MM	4	118.0	123.5	2	2012	50	-	65	86	-	32	33	-
4SPAX125MM	4	125.0	130.5	2	2012	50	-	65	92	-	32	33	-
4SPAX132MM	4	132.0	137.5	2	2517	60	-	65	98	-	45	20	-
4SPAX140MM	4	140.0	145.5	2	2517	60	-	65	106	-	45	20	-
4SPAX150MM	4	150.0	155.5	2	2517	60	-	65	116	-	45	20	-
4SPAX160MM	4	160.0	165.5	2	2517	60	-	65	126	-	45	20	-
4SPAX170MM	4	170.0	175.5	2	2517	60	-	65	138	-	45	20	-
4SPAX180MM	4	180.0	185.5	2	2517	60	-	65	146	-	45	20	-
4SPAX190MM	4	190.0	195.5	2	2517	60	-	65	158	-	45	20	-
4SPAX200MM	4	200.0	205.5	2	3020	75	-	65	165	-	51	14	-
4SPAX224MM	4	224.0	229.5	2	3020	75	-	65	189	-	51	14	-
4SPAX250MM	4	250.0	255.5	6	3020	75	10	65	215	7	51	7	150
4SPAX280MM	4	280.0	285.5	6	3020	75	10	65	245	7	51	7	150
4SPAX315MM	4	315.0	320.5	6	3020	75	10	65	280	7	51	7	150
4SPAX355MM	4	355.0	360.5	5	3020	75	-	65	320	7	51	7	150
4SPAX400MM	4	400.0	405.5	5	3020	75	-	65	365	7	51	7	150
4SPAX450MM	4	450.0	455.5	5	3020	75	-	65	415	7	51	7	150
4SPAX500MM	4	500.0	505.5	5	3020	75	-	65	465	7	51	7	150
4SPAX560MM	4	560.0	565.5	4	3535	90	-	65	525	12	89	12	170
4SPAX630MM	4	630.0	635.5	4	3535	90	-	65	595	12	89	12	170
4SPAX800MM	4	800.0	805.5	4	3535	90	-	65	765	12	89	12	170
4SPAX1000MM	4	1000.0	1005.5	4	4040	100	-	65	965	18.5	102	18.5	216

Taper Bore V-pulleys


SPA-5

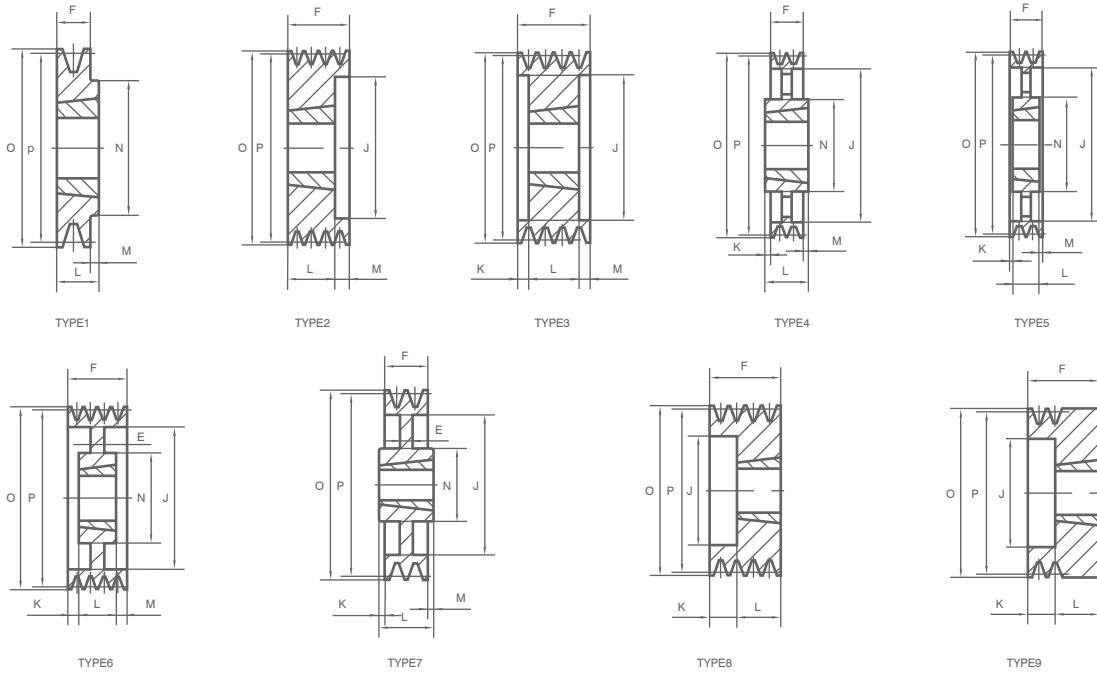

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
5SPAX100MM	5	100.0	105.5	2	1615	42	-	80	70	-	38	42	-
5SPAX106MM	5	106.0	111.5	8	2012	50	-	80	76	48	32	-	-
5SPAX112MM	5	112.0	117.5	8	2012	50	-	80	80	48	32	-	-
5SPAX118MM	5	118.0	123.5	2	2012	50	-	80	86	-	32	48	-
5SPAX125MM	5	125.0	130.5	3	2012	50	-	80	92	24	32	24	-
5SPAX132MM	5	132.0	137.5	3	2517	60	-	80	98	17.5	45	17.5	-
5SPAX140MM	5	140.0	145.5	3	2517	60	-	80	106	17.5	45	17.5	-
5SPAX150MM	5	150.0	155.5	3	2517	60	-	80	116	17.5	45	17.5	-
5SPAX160MM	5	160.0	165.5	3	2517	60	-	80	126	17.5	45	17.5	-
5SPAX180MM	5	180.0	185.5	3	3020	75	-	80	146	14.5	51	14.5	-
5SPAX200MM	5	200.0	205.5	3	3020	75	-	80	165	14.5	51	14.5	-
5SPAX224MM	5	224.0	229.5	2	3020	75	-	80	189	-	51	29	-
5SPAX250MM	5	250.0	255.5	6	3020	75	10	80	215	14.5	51	14.5	150
5SPAX280MM	5	280.0	285.5	7	3535	90	10	80	245	4.5	89	4.5	170
5SPAX315MM	5	315.0	320.5	7	3535	90	12	80	280	4.5	89	4.5	170
5SPAX355MM	5	355.0	360.5	4	3535	90	-	80	320	4.5	89	4.5	170
5SPAX400MM	5	400.0	405.5	4	3535	90	-	80	365	4.5	89	4.5	170
5SPAX450MM	5	450.0	455.5	4	3535	90	-	80	415	4.5	89	4.5	170
5SPAX500MM	5	500.0	505.5	4	3535	90	-	80	465	4.5	89	4.5	170
5SPAX560MM	5	560.0	565.5	4	3535	90	-	80	525	4.5	89	4.5	170
5SPAX630MM	5	630.0	635.5	4	3535	90	-	80	595	4.5	89	4.5	170
5SPAX800MM	5	800.0	805.5	4	4040	100	-	80	765	11	102	11	216
5SPAX1000MM	5	1000.0	1005.5	4	4545	110	-	80	965	17	114	17	225

T_{aper} B_{ore} V-pulleys


SPA-6

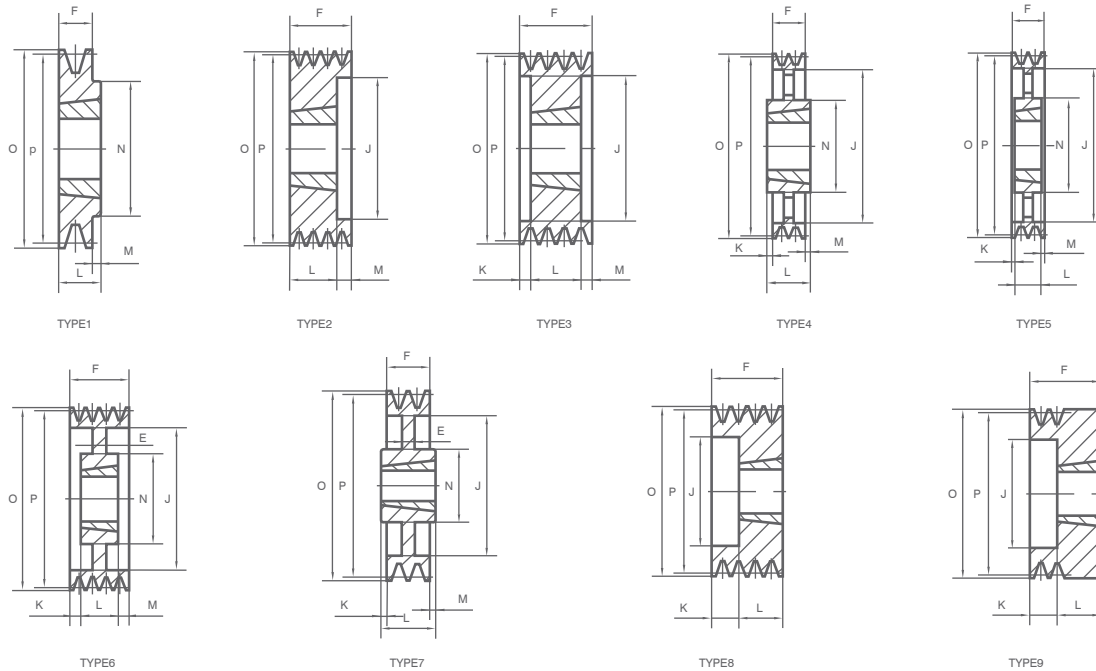

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
6SPAX100MM	6	100.0	105.5	3	1615	42	—	95	70	28.5	38	28.5	—
6SPAX106MM	6	106.0	111.5	8	2012	50	—	95	76	63	32	—	—
6SPAX112MM	6	112.0	117.5	8	2012	50	—	95	80	63	32	—	—
6SPAX118MM	6	118.0	123.5	8	2012	50	—	95	86	63	32	—	—
6SPAX125MM	6	125.0	130.5	3	2012	50	—	95	92	31.5	32	31.5	—
6SPAX132MM	6	132.0	137.5	3	2517	60	—	95	98	25	45	25	—
6SPAX140MM	6	140.0	145.5	3	2517	60	—	95	106	25	45	25	—
6SPAX150MM	6	150.0	155.5	3	2517	60	—	95	116	25	45	25	—
6SPAX160MM	6	160.0	165.5	3	2517	60	—	95	126	25	45	25	—
6SPAX180MM	6	180.0	185.5	3	3020	75	—	95	146	22	51	22	—
6SPAX200MM	6	200.0	205.5	3	3020	75	—	95	165	22	51	22	—
6SPAX224MM	6	224.0	229.5	3	3020	75	—	95	189	22	51	22	—
6SPAX250MM	6	250.0	255.5	6	3020	75	20	95	215	22	51	22	150
6SPAX280MM	6	280.0	285.5	6	3535	90	25	95	245	3	89	3	170
6SPAX315MM	6	315.0	320.5	6	3535	90	25	95	280	3	89	3	170
6SPAX355MM	6	355.0	360.5	5	3535	90	—	95	320	3	89	3	170
6SPAX400MM	6	400.0	405.5	5	3535	90	—	95	365	3	89	3	170
6SPAX450MM	6	450.0	455.5	5	3535	90	—	95	415	3	89	3	170
6SPAX500MM	6	500.0	505.5	5	3535	90	—	95	465	3	89	3	170
6SPAX560MM	6	560.0	565.5	5	3535	90	—	95	525	3	89	3	170
6SPAX630MM	6	630.0	635.5	4	4040	100	—	95	595	3.5	102	3.5	216
6SPAX800MM	6	800.0	805.5	4	4040	100	—	95	765	3.5	102	3.5	216
6SPAX1000MM	6	1000.0	1005.5	4	4545	110	—	95	965	9.5	114	9.5	225

Taper Bore V-pulleys

SPB-1

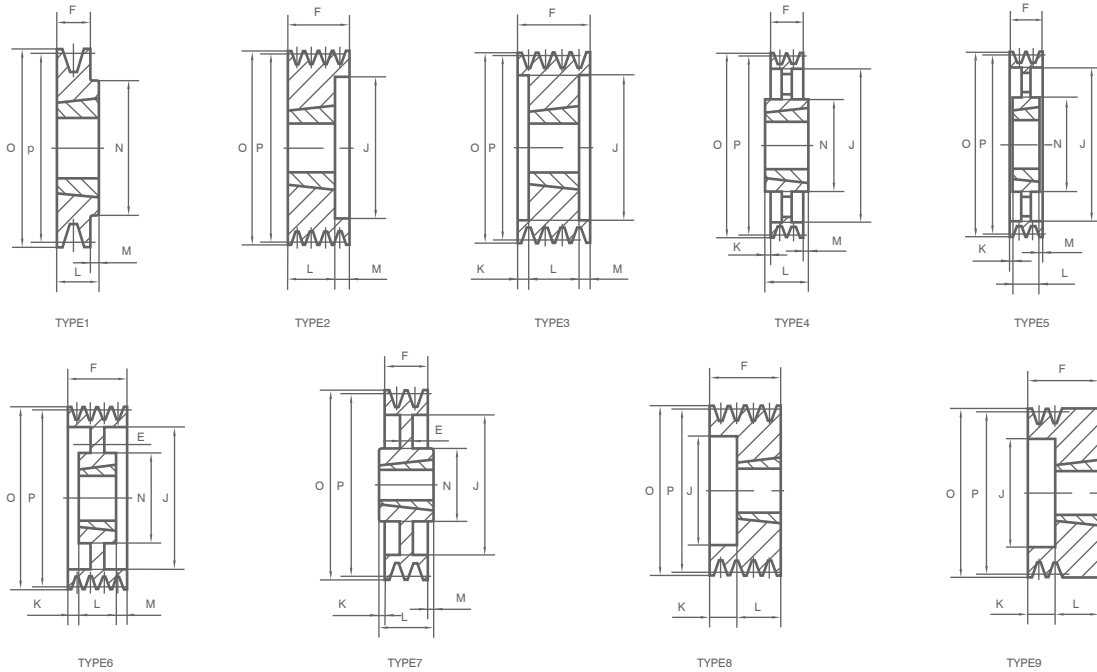

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
1SPBX100MM	1	100.0	107.0	1	1610	42	-	25	-	-	25	-	-
1SPBX112MM	1	112.0	119.0	1	1610	42	-	25	-	-	25	-	-
1SPBX118MM	1	118.0	125.0	1	1610	42	-	25	-	-	25	-	-
1SPBX125MM	1	125.0	132.0	1	1610	42	-	25	-	-	25	-	-
1SPBX132MM	1	132.0	139.0	1	1610	42	-	25	-	-	25	-	-
1SPBX140MM	1	140.0	147.0	1	1610	42	-	25	-	-	25	-	-
1SPBX150MM	1	150.0	157.0	1	1610	42	-	25	-	-	25	-	-
1SPBX160MM	1	160.0	167.0	1	1610	42	-	25	-	-	25	-	-
1SPBX170MM	1	170.0	177.0	1	1610	42	-	25	-	-	25	-	-
1SPBX180MM	1	180.0	187.0	6	1610	42	10	25	137	-	25	-	80
1SPBX190MM	1	190.0	197.0	7	2012	50	10	25	147	3.5	32	3.5	100
1SPBX200MM	1	200.0	207.0	7	2012	50	10	25	157	3.5	32	3.5	100
1SPBX212MM	1	212.0	219.0	7	2012	50	10	25	169	3.5	32	3.5	100
1SPBX224MM	1	224.0	231.0	7	2012	50	10	25	181	3.5	32	3.5	100
1SPBX236MM	1	236.0	243.0	7	2012	50	10	25	193	3.5	32	3.5	100
1SPBX250MM	1	250.0	257.0	7	2012	50	10	25	207	3.5	32	3.5	100
1SPBX280MM	1	280.0	287.0	7	2012	50	10	25	237	3.5	32	3.5	100
1SPBX315MM	1	315.0	322.0	7	2012	50	10	25	272	3.5	32	3.5	100


Standard bore dimensions of BTL bushings

Bushing	Stock Bores																							
	11	12	14	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	60		
1210	●	●	●	●	●	●	●	●	●	●	●	●	●											
1610			●	●	●	●	●	●	●	●	●	●	●	●	●	●	△							
2012					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
2517							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

shallow keyway △

Taper Bore V-pulleys


SPB-2

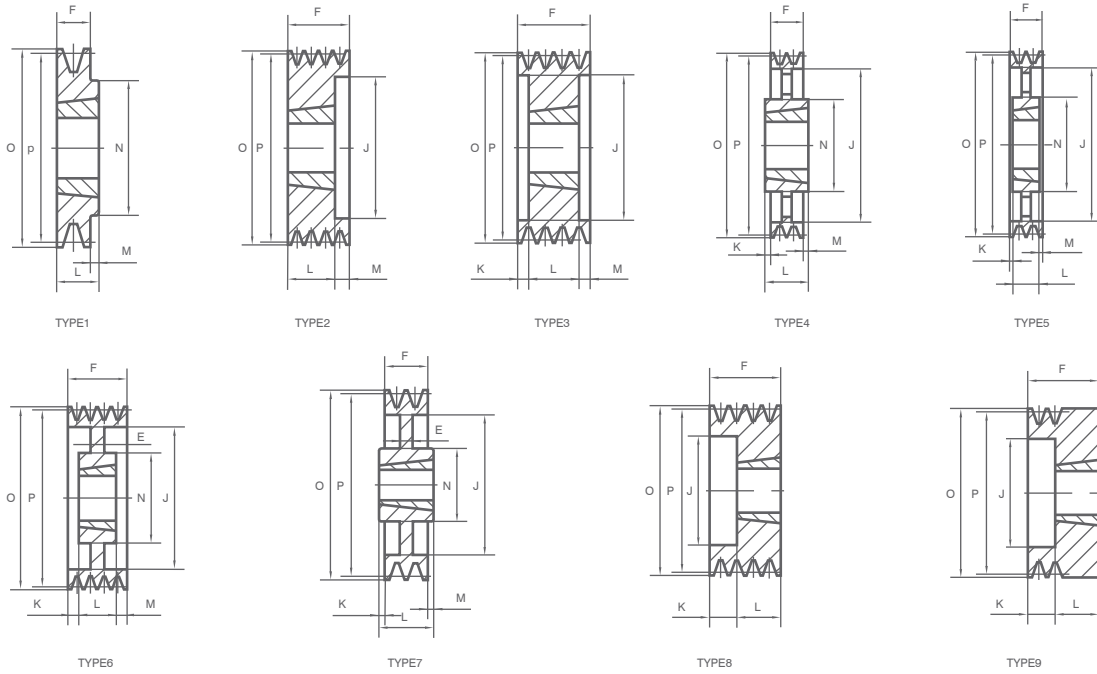

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
2SPBX100MM	2	100.0	107.0	8	1610	42	-	44	62	-	25	19	-
2SPBX112MM	2	112.0	119.0	2	1610	42	-	44	72	-	25	19	-
2SPBX118MM	2	118.0	127.0	2	1610	42	-	44	78	-	25	19	-
2SPBX125MM	2	125.0	132.0	2	2012	50	-	44	82	-	32	12	-
2SPBX132MM	2	132.0	139.0	2	2012	50	-	44	89	-	32	12	-
2SPBX140MM	2	140.0	147.0	2	2012	50	-	44	97	-	32	12	-
2SPBX150MM	2	150.0	157.0	2	2012	50	-	44	107	-	32	12	-
2SPBX160MM	2	160.0	167.0	2	2012	50	-	44	117	-	32	12	-
2SPBX170MM	2	170.0	177.0	2	2012	50	-	44	127	-	32	12	-
2SPBX180MM	2	180.0	187.0	1	2517	60	-	44	-	-	45	1	120
2SPBX190MM	2	190.0	197.0	1	2517	60	-	44	-	-	45	1	120
2SPBX200MM	2	200.0	207.0	1	2517	60	-	44	-	-	45	1	120
2SPBX212MM	2	212.0	219.0	7	2517	60	10	44	169	-	45	1	120
2SPBX224MM	2	224.0	231.0	7	2517	60	10	44	181	1	45	-	120
2SPBX236MM	2	236.0	243.0	7	2517	60	10	44	193	1	45	-	120
2SPBX250MM	2	250.0	257.0	7	2517	60	10	44	207	1	45	-	120
2SPBX280MM	2	280.0	287.0	7	2517	60	12	44	237	1	45	-	120
2SPBX300MM	2	300.0	307.0	7	2517	60	12	44	257	1	45	-	120
2SPBX315MM	2	315.0	322.0	7	2517	60	12	44	272	1	45	-	120
2SPBX335MM	2	335.0	342	7	2517	60	12	44	292	1	45	-	120
2SPBX355MM	2	355.0	362.0	4	3020	75		44	312	3.5	51	3.5	150
2SPBX400MM	2	400.0	407.0	4	3020	75		44	357	3.5	51	3.5	150
2SPBX450MM	2	450.0	457.0	4	3020	75		44	407	3.5	51	3.5	150
2SPBX500MM	2	500.0	507.0	4	3020	75		44	457	3.5	51	3.5	150
2SPBX560MM	2	560.0	567.0	4	3030	75		44	517	4	76	28	150
2SPBX630MM	2	630.0	637.0	4	3030	75		44	587	4	76	28	150

Taper Bore V-pulleys


SPB-3

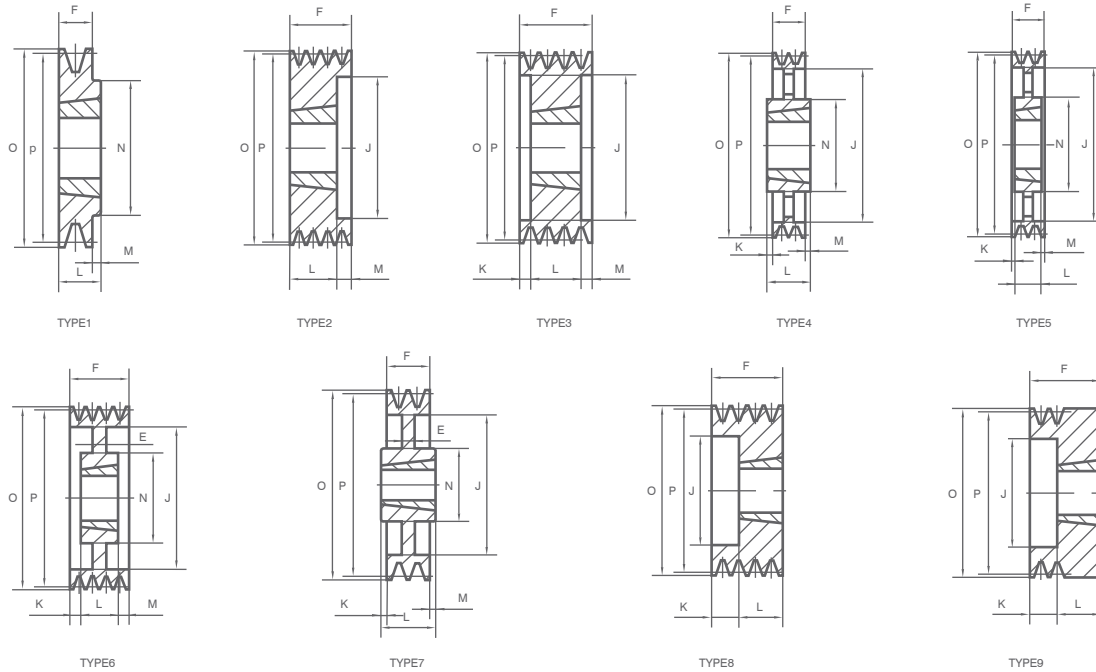

PART NO.	NO.OF GROOVES	RD	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
3SPBX100MM	3	100.0	107.0	8	1610	42	-	63	57	-	25	38	-
3SPBX112MM	3	112.0	119.0	2	1610	42	-	63	72	-	25	38	-
3SPBX118MM	3	118.0	125.0	2	1610	42	-	63	78	-	25	38	-
3SPBX125MM	3	125.0	132.0	2	2012	50	-	63	82	-	32	31	-
3SPBX132MM	3	132.0	139.0	2	2012	50	-	63	89	-	32	31	-
3SPBX140MM	3	140.0	147.0	2	2012	50	-	63	97	-	32	31	-
3SPBX150MM	3	150.0	157.0	2	2517	60	-	63	107	-	45	18	-
3SPBX160MM	3	160.0	167.0	2	2517	60	-	63	117	-	45	18	-
3SPBX170MM	3	170.0	177.0	2	2517	60	-	63	127	-	45	18	-
3SPBX180MM	3	180.0	187.0	2	2517	60	-	63	137	-	45	18	-
3SPBX190MM	3	190.0	197.0	2	2517	60	-	63	147	-	45	18	-
3SPBX200MM	3	200.0	207.0	2	2517	60	-	63	157	-	45	18	-
3SPBX212MM	3	212.0	219.0	6	2517	60	12	63	169	-	45	18	120
3SPBX224MM	3	224.0	231.0	6	2517	60	12	63	181	-	45	18	120
3SPBX236MM	3	236.0	243.0	6	2517	60	10	63	193	-	45	18	120
3SPBX250MM	3	250.0	257.0	6	3020	75	12	63	207	-	51	12	150
3SPBX280MM	3	280.0	287.0	6	3020	75	13	63	237	6	51	6	150
3SPBX300MM	3	300.0	307.0	6	3020	75	13	63	257	6	51	6	150
3SPBX315MM	3	315.0	322.0	6	3020	75	13	63	272	6	51	6	150
3SPBX335MM	3	335.0	342.0	6	3020	75	13	63	292	6	51	6	150
3SPBX355MM	3	355.0	362.0	5	3020	75	-	63	312	6	51	6	150
3SPBX400MM	3	400.0	407.0	4	3535	90	-	63	357	13	89	13	170
3SPBX450MM	3	450.0	457.0	4	3535	90	-	63	407	-	89	26	170
3SPBX500MM	3	500.0	507.0	4	3535	90	-	63	457	-	89	26	170
3SPBX560MM	3	560.0	567.0	4	3535	90	-	63	517	-	89	26	170
3SPBX630MM	3	630.0	637.0	4	3535	90	-	63	587	-	89	26	170
3SPBX710MM	3	710.0	717.0	4	3535	90	-	63	664	4	89	22	170
3SPBX800MM	3	800.0	807.0	4	3535	90	-	63	754	4	89	22	170
3SPBX900MM	3	900.0	907.0	4	3535	90	-	63	854	4	89	22	170
3SPBX1000MM	3	1000.0	1007.0	4	4040	100	-	63	954	6	102	33	200
3SPBX1250MM	3	1250.0	1257.0	4	4040	100	-	63	1204	6	102	33	200

Taper Bore V-pulleys


SPB-4

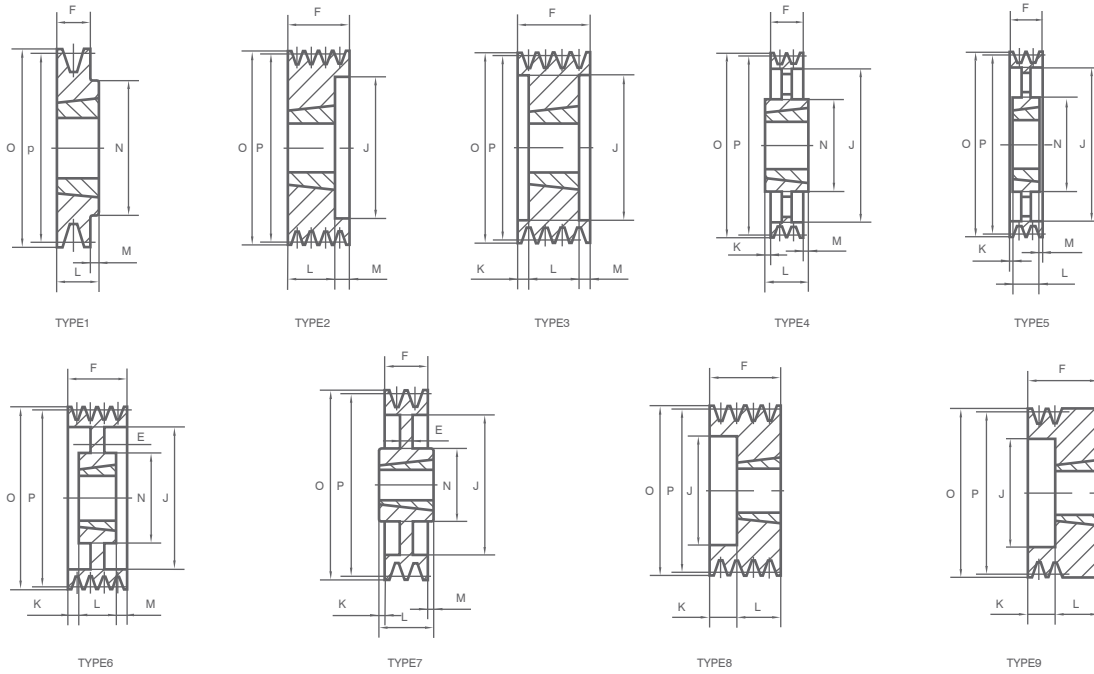

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
4SPBX125MM	4	125.0	132.0	3	2012	50	-	82	82	25	32	25	-
4SPBX132MM	4	132.0	139.0	3	2012	50	-	82	89	25	32	25	-
4SPBX140MM	4	140.0	147.0	3	2517	60	-	82	97	18.5	45	18.5	-
4SPBX150MM	4	150.0	157.0	3	2517	60	-	82	107	18.5	45	18.5	-
4SPBX160MM	4	160.0	167.0	3	2517	60	-	82	117	18.5	45	18.5	-
4SPBX170MM	4	170.0	177.0	3	2517	60	-	82	127	18.5	45	18.5	-
4SPBX180MM	4	180.0	187.0	3	2517	60	-	82	137	18.5	45	18.5	-
4SPBX190MM	4	190.0	197.0	3	2517	60	-	82	147	18.5	45	18.5	-
4SPBX200MM	4	200.0	207.0	3	3020	75	-	82	157	15.5	51	15.5	-
4SPBX212MM	4	212.0	219.0	3	3020	75	-	82	169	15.5	51	15.5	-
4SPBX224MM	4	224.0	231.0	3	3020	75	-	82	181	15.5	51	15.5	-
4SPBX236MM	4	236.0	243.0	3	3020	75	-	82	193	15.5	51	15.5	-
4SPBX250MM	4	250.0	257.0	6	3020	75	14	82	207	15.5	51	15.5	150
4SPBX280MM	4	280.0	287.0	6	3020	75	16	82	237	15.5	51	15.5	150
4SPBX300MM	4	300.0	307.0	6	3020	75	16	82	257	15.5	51	15.5	150
4SPBX315MM	4	315.0	322.0	7	3535	90	16	82	272	3.5	89	3.5	170
4SPBX335MM	4	335.0	342.0	7	3535	90	16	82	292	3.5	89	3.5	170
4SPBX355MM	4	355.0	362.0	7	3535	90	16	82	312	3.5	89	3.5	170
4SPBX400MM	4	400.0	407.0	4	3535	90	-	82	357	3.5	89	3.5	170
4SPBX450MM	4	450.0	457.0	4	3535	90	-	82	407	-	89	7	170
4SPBX500MM	4	500.0	507.0	4	3535	90	-	82	457	-	89	7	170
4SPBX560MM	4	560.0	567.0	4	3535	90	-	82	517	-	89	7	170
4SPBX630MM	4	630.0	637.0	4	3535	90	-	82	587	-	89	7	170
4SPBX710MM	4	710.0	717.0	4	3535	90	-	82	664	3.5	89	3.5	187
4SPBX800MM	4	800.0	807.0	4	4040	100	-	82	754	4	102	16	200
4SPBX900MM	4	900.0	907.0	4	4040	100	-	82	854	4	102	16	216
4SPBX1000MM	4	1000.0	1007.0	4	4040	100	-	82	954	4	102	16	216
4SPBX1250MM	4	1250.0	1257.0	4	4545	110	-	82	1204	6	114	26	225

Taper Bore V-pulleys


SPB-5

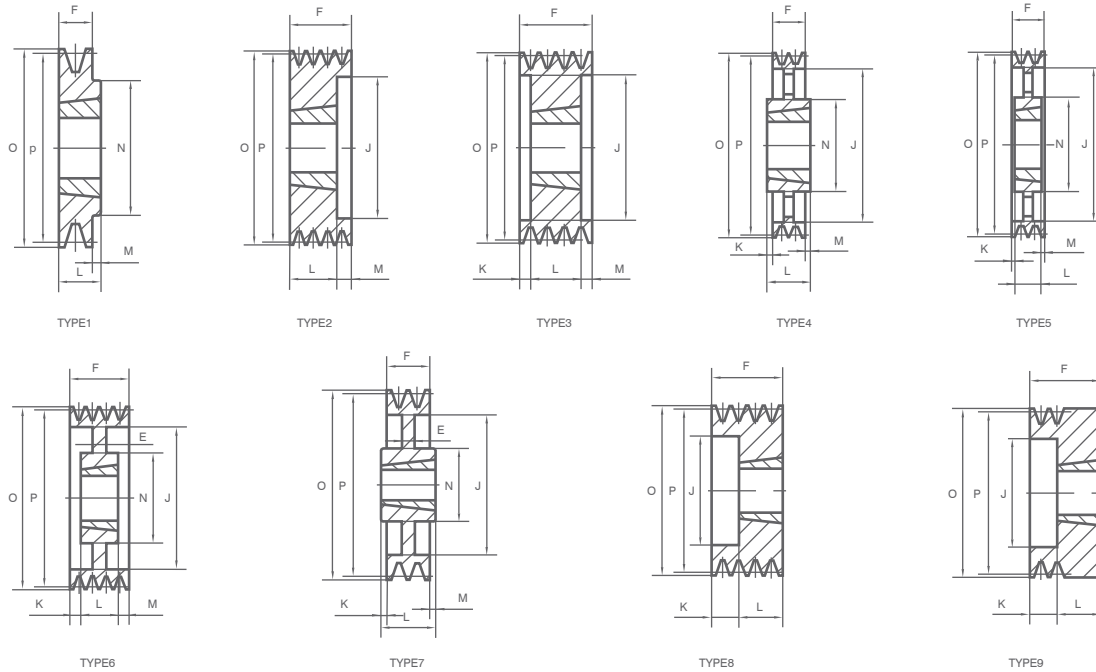

PART NO.	NO.OF GROOVES	R.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
5SPBX125MM	5	125.0	132.0	8	2012	50	-	101	82	69	32	-	-
5SPBX132MM	5	132.0	139.0	8	2517	60	-	101	89	56	45	-	-
5SPBX140MM	5	140.0	147.0	3	2517	60	-	101	97	28	45	28	-
5SPBX150MM	5	150.0	157.0	3	2517	60	-	101	107	28	45	28	-
5SPBX160MM	5	160.0	167.0	3	2517	60	-	101	117	28	45	28	-
5SPBX170MM	5	170.0	177.0	3	3020	75	-	101	127	25	51	25	-
5SPBX180MM	5	180.0	187.0	3	3020	75	-	101	137	25	51	25	-
5SPBX190MM	5	190.0	197.0	3	3020	75	-	101	147	25	51	25	-
5SPBX200MM	5	200.0	207.0	3	3020	75	-	101	157	25	51	25	-
5SPBX212MM	5	212.0	219.0	3	3020	75	-	101	169	25	51	25	-
5SPBX224MM	5	224.0	231.0	3	3020	75	-	101	181	25	51	25	-
5SPBX236MM	5	236.0	243.0	3	3535	90	-	101	193	6	89	6	-
5SPBX250MM	5	250.0	257.0	3	3535	90	-	101	207	6	89	6	-
5SPBX280MM	5	280.0	287.0	6	3535	90	18	101	237	6	89	6	170
5SPBX300MM	5	300.0	307.0	6	3535	90	18	101	257	6	89	6	170
5SPBX315MM	5	315.0	322.0	6	3535	90	18	101	272	6	89	6	170
5SPBX335MM	5	335.0	342.0	6	3535	90	16	101	292	6	89	6	170
5SPBX355MM	5	355.0	362.0	5	3535	90	-	101	312	6	89	6	170
5SPBX400MM	5	400.0	407.0	5	3535	90	-	101	357	6	89	6	170
5SPBX450MM	5	450.0	457.0	5	3535	90	-	101	407	-	89	12	170
5SPBX500MM	5	500.0	507.0	5	3535	90	-	101	457	-	89	12	170
5SPBX560MM	5	560.0	567.0	4	4040	100	-	101	517	-	102	1	200
5SPBX630MM	5	630.0	637.0	4	4040	100	-	101	587	-	102	1	200
5SPBX710MM	5	710.0	717.0	4	4040	100	-	101	664	0.5	102	0.5	200
5SPBX800MM	5	800.0	807.0	4	4040	100	-	101	754	0.5	102	0.5	200
5SPBX900MM	5	900.0	907.0	4	4545	110	-	101	854	6.5	114	6.5	225
5SPBX1000MM	5	1000.0	1007.0	4	4545	110	-	101	954	6.5	114	6.5	225
5SPBX1250MM	5	1250.0	1257.0	4	4545	110	-	101	1204	6.5	114	6.5	225

Taper Bore V-pulleys

SPB-6

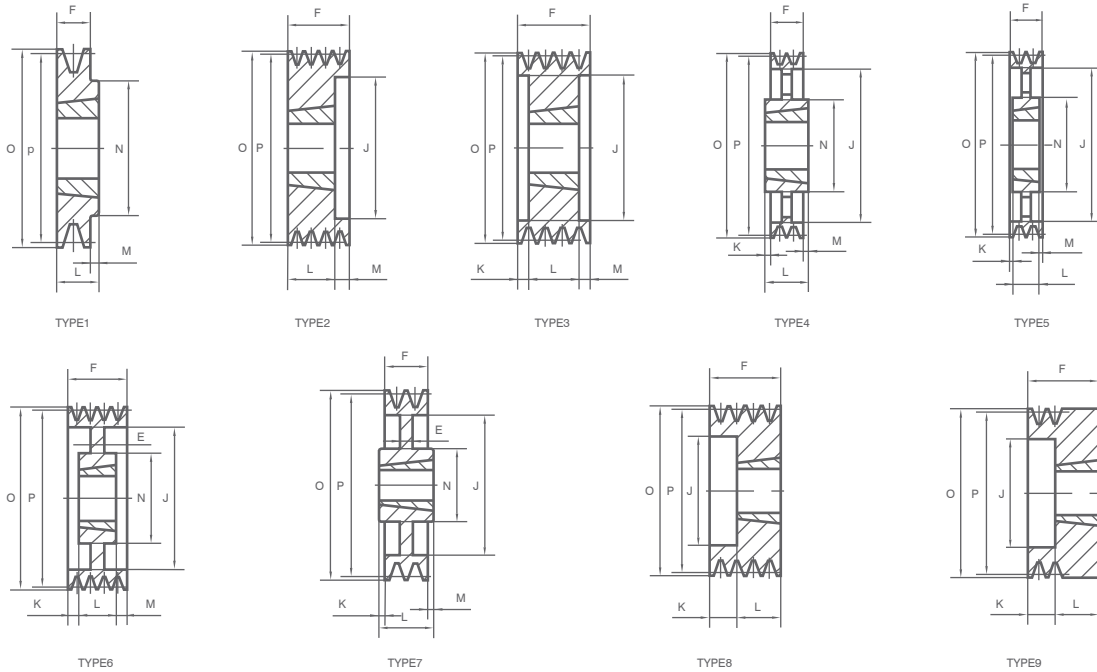

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
6SPBX140MM	6	140.0	147.0	3	2517	60	—	120	97	37.5	45	37.5	—
6SPBX150MM	6	150.0	157.0	3	2517	60	—	120	107	37.5	45	37.5	—
6SPBX160MM	6	160.0	167.0	3	3020	75	—	120	117	34.5	51	34.5	—
6SPBX170MM	6	170.0	177.0	3	3020	75	—	120	127	34.5	51	34.5	—
6SPBX180MM	6	180.0	187.0	3	3020	75	—	120	137	34.5	51	34.5	—
6SPBX190MM	6	190.0	197.0	3	3020	75	—	120	147	34.5	51	34.5	—
6SPBX200MM	6	200.0	207.0	3	3020	75	—	120	157	34.5	51	34.5	—
6SPBX212MM	6	212.0	219.0	3	3535	90	—	120	169	15.5	89	15.5	—
6SPBX224MM	6	224.0	231.0	3	3535	90	—	120	181	15.5	89	15.5	—
6SPBX236MM	6	236.0	243.0	3	3535	90	—	120	193	15.5	89	15.5	—
6SPBX250MM	6	250.0	257.0	3	3535	90	—	120	207	15.5	89	15.5	—
6SPBX280MM	6	280.0	287.0	6	3535	90	18	120	237	15.5	89	15.5	170
6SPBX300MM	6	300.0	307.0	6	3535	90	18	120	257	15.5	89	15.5	170
6SPBX315MM	6	315.0	322.0	6	3535	90	18	120	272	15.5	89	15.5	170
6SPBX335MM	6	335.0	342.0	6	3535	90	18	120	292	15.5	89	15.5	170
6SPBX355MM	6	355.0	362.0	6	3535	90	18	120	312	15.5	89	15.5	170
6SPBX400MM	6	400.0	407.0	5	3535	90	—	120	357	15.5	89	15.5	170
6SPBX450MM	6	450.0	457.0	5	4040	100	—	120	407	—	102	18	200
6SPBX500MM	6	500.0	507.0	5	4040	100	—	120	457	—	102	18	200
6SPBX560MM	6	560.0	567.0	5	4040	100	—	120	517	—	102	18	200
6SPBX630MM	6	630.0	637.0	5	4040	100	—	120	587	—	102	18	200
6SPBX710MM	6	710.0	717.0	5	4040	100	—	120	664	9	102	9	216
6SPBX800MM	6	800.0	807.0	5	4545	110	—	120	754	3	114	3	225
6SPBX900MM	6	900.0	907.0	5	4545	110	—	120	854	3	114	3	225
6SPBX1000MM	6	1000.0	1007.0	5	4545	110	—	120	954	3	114	3	225
6SPBX1250MM	6	1250.0	1257.0	4	5050	125	—	120	1204	3.5	127	3.5	245


T_{aper}
B_{ore}

V-pulleys


SPB-8




TYPE1




TYPE2




TYPE3




TYPE4




TYPE5




TYPE6



TYPE7



TYPE8




TYPE9

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
8SPBX160MM	8	160.0	167.0	3	3020	75	-	158	117	53.5	51	53.5	-
8SPBX170MM	8	170.0	177.0	3	3030	75	-	158	127	41	76	41	-
8SPBX180MM	8	180.0	187.0	3	3030	75	-	158	137	41	76	41	-
8SPBX190MM	8	190.0	197.0	3	3030	75	-	158	147	41	76	41	-
8SPBX200MM	8	200.0	207.0	3	3535	90	-	158	157	34.5	89	34.5	-
8SPBX212MM	8	212.0	219.0	3	3535	90	-	158	169	34.5	89	34.5	-
8SPBX224MM	8	224.0	231.0	3	3535	90	-	158	181	34.5	89	34.5	-
8SPBX236MM	8	236.0	243.0	3	3535	90	-	158	193	34.5	89	34.5	-
8SPBX250MM	8	250.0	257.0	3	3535	90	-	158	207	34.5	89	34.5	-
8SPBX280MM	8	280.0	287.0	3	3535	90	-	158	237	34.5	89	34.5	-
8SPBX300MM	8	300.0	307.0	6	3535	90	20	158	257	34.5	89	34.5	170
8SPBX315MM	8	315.0	322.0	6	3535	90	18	158	272	34.5	89	34.5	170
8SPBX335MM	8	335.0	342.0	6	3535	90	18	158	292	34.5	89	34.5	170
8SPBX355MM	8	355.0	362.0	6	3535	90	18	158	312	34.5	89	34.5	170
8SPBX400MM	8	400.0	407.0	5	4040	100	-	158	357	28	102	28	200
8SPBX450MM	8	450.0	457.0	5	4040	100	-	158	407	28	102	28	200
8SPBX500MM	8	500.0	507.0	5	4040	100	-	158	457	28	102	28	200
8SPBX560MM	8	560.0	567.0	5	4545	110	-	158	517	22	114	22	225
8SPBX630MM	8	630.0	637.0	5	4545	110	-	158	587	22	114	22	225
8SPBX710MM	8	710.0	717.0	5	4545	110	-	158	664	22	114	22	225
8SPBX800MM	8	800.0	807.0	5	4545	110	-	158	754	22	114	22	225
8SPBX900MM	8	900.0	907.0	5	4545	110	-	158	854	22	114	22	225
8SPBX1000MM	8	1000.0	1007.0	5	5050	125	-	158	954	15.5	127	15.5	245
8SPBX1250MM	8	1250.0	1257.0	5	5050	125	-	158	1204	15.5	127	15.5	245

Taper Bore V-pulleys

SPB-10

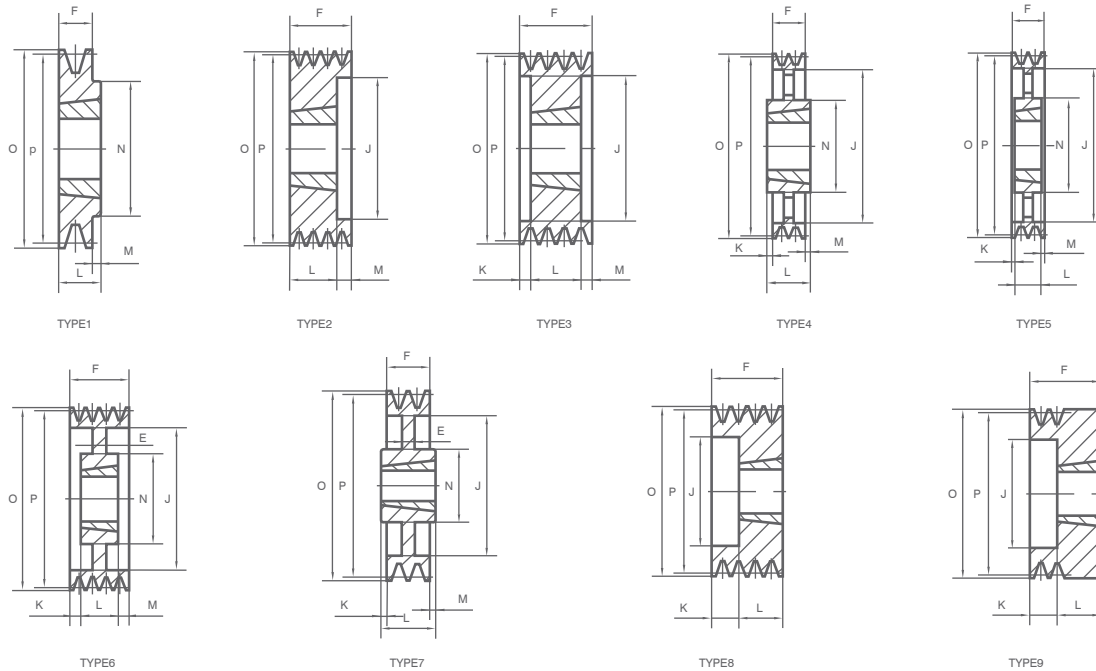


PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
10SPBX224MM	10	224.0	231.0	3	3535	90	-	196	181	53.5	89	53.5	-
10SPBX236MM	10	236.0	243.0	3	3535	90	-	196	193	53.5	89	53.5	-
10SPBX250MM	10	250.0	257.0	3	3535	90	-	196	207	53.5	89	53.5	-
10SPBX280MM	10	280.0	287.0	3	3535	90	-	196	237	53.5	89	53.5	-
10SPBX315MM	10	315.0	322.0	6	3535	90	18	196	272	53.5	89	53.5	170
10SPBX335MM	10	335.0	342.0	6	4040	100	20	196	292	47	102	47	200
10SPBX355MM	10	355.0	362.0	6	4040	100	20	196	312	47	102	47	200
10SPBX400MM	10	400.0	407.0	5	4040	100	-	196	357	47	102	47	200
10SPBX450MM	10	450.0	457.0	5	4545	110	-	196	407	41	114	41	225
10SPBX500MM	10	500.0	507.0	5	4545	110	-	196	457	41	114	41	225
10SPBX560MM	10	560.0	567.0	5	4545	110	-	196	517	41	114	41	225
10SPBX630MM	10	630.0	637.0	5	4545	110	-	196	587	41	114	41	225
10SPBX710MM	10	710.0	717.0	5	4545	110	-	196	664	41	114	41	225
10SPBX800MM	10	800.0	807.0	5	4545	110	-	196	754	41	114	41	225
10SPBX900MM	10	900.0	907.0	5	5050	125	-	196	854	34.5	127	34.5	245
10SPBX1000MM	10	1000.0	1007.0	5	5050	125	-	196	954	34.5	127	34.5	245
10SPBX1250MM	10	1250.0	1257.0	5	5050	169	-	196	954	34.5	127	34.5	245

Standard bore dimensions of BTL bushings

Bushing	Stock Bores																									
	25	28	30	32	35	38	40	42	45	48	50	55	60	65	70	75	80	85	90	95	100	105	115	120	125	
3030	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●											
3535					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
4040							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
												●	●	●	●	●	●	●	●	●	●	●				
5050													●	●	●	●	●	●	●	●	●	●	●	●	●	●

Taper Bore V-pulleys


SPC-3

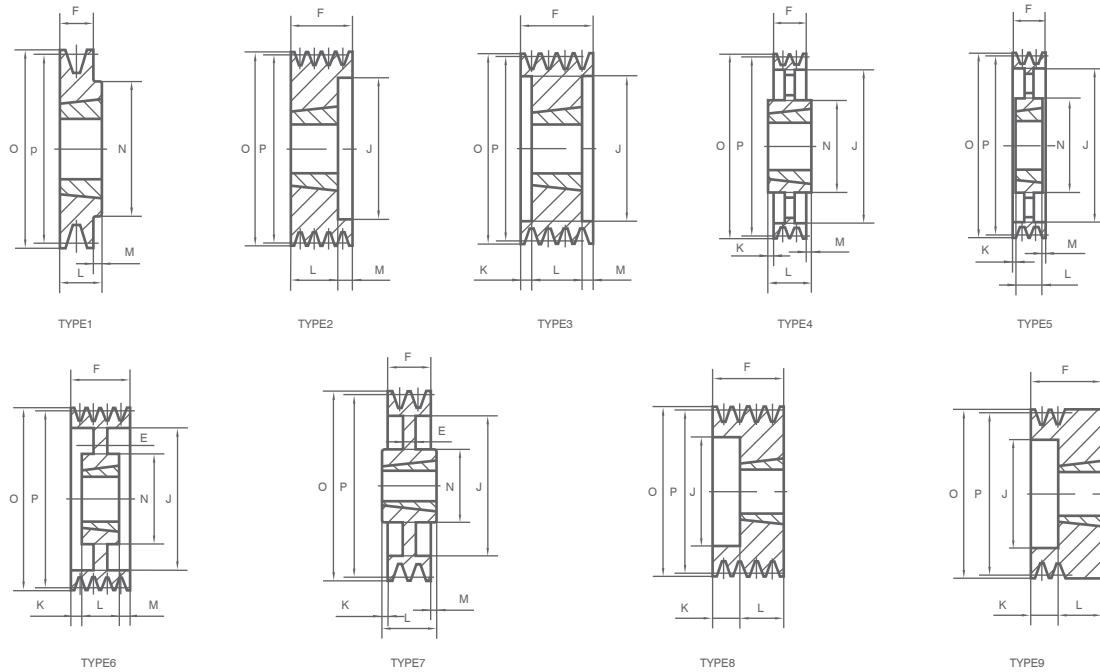

PART NO.	NO.OF GROOVES	RD	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
3SPCX200MM	3	200.0	209.6	3	2517	60	-	85	150	20	45	20	-
3SPCX212MM	3	212.0	221.6	3	3020	75	-	85	162	17	51	17	-
3SPCX224MM	3	224.0	233.6	3	3020	75	-	85	173	17	51	17	-
3SPCX236MM	3	236.0	245.6	3	3020	75	-	85	185	17	51	17	-
3SPCX250MM	3	250.0	259.6	3	3020	75	-	85	200	17	51	17	-
3SPCX265MM	3	265.0	274.6	1	3535	90	-	85	209	-	89	4	170
3SPCX280MM	3	280.0	289.6	1	3535	90	-	85	224	-	89	4	170
3SPCX300MM	3	300.0	309.6	7	3535	90	18	85	249	2	89	2	170
3SPCX315MM	3	315.0	324.6	7	3535	90	18	85	264	2	89	2	170
3SPCX335MM	3	335.0	345.0	7	3535	90	18	85	284	2	89	2	170
3SPCX355MM	3	355.0	365.0	7	3535	90	18	85	304	2	89	2	170
3SPCX375MM	3	375.0	384.6	7	3535	90	20	85	324	2	89	2	170
3SPCX400MM	3	400.0	409.6	4	3535	90	-	85	344	2	89	2	170
3SPCX425MM	3	425.0	434.6	4	3535	90	-	85	369	2	89	2	170
3SPCX450MM	3	450.0	459.6	4	3535	90	-	85	394	2	89	2	170
3SPCX475MM	3	475.0	484.6	4	3535	90	-	85	419	2	89	2	170
3SPCX500MM	3	500.0	509.6	4	3535	90	-	85	444	2	89	2	170
3SPCX530MM	3	530.0	539.6	4	3535	90	-	85	474	2	89	2	170
3SPCX560MM	3	560.0	569.6	4	3535	90	-	85	504	2	89	2	170
3SPCX630MM	3	630.0	639.6	4	4040	100	-	85	574	8.5	102	8.5	200
3SPCX800MM	3	800.0	809.6	4	4545	110	-	85	737	4	114	25	225
3SPCX1000MM	3	1000.0	1009.6	4	5050	125	-	85	937	8	127	34	245
3SPCX1250MM	3	1250.0	1259.6	4	5050	125	-	85	1187	8	127	34	245

Taper B_{ore} V-pulleys


SPC-4

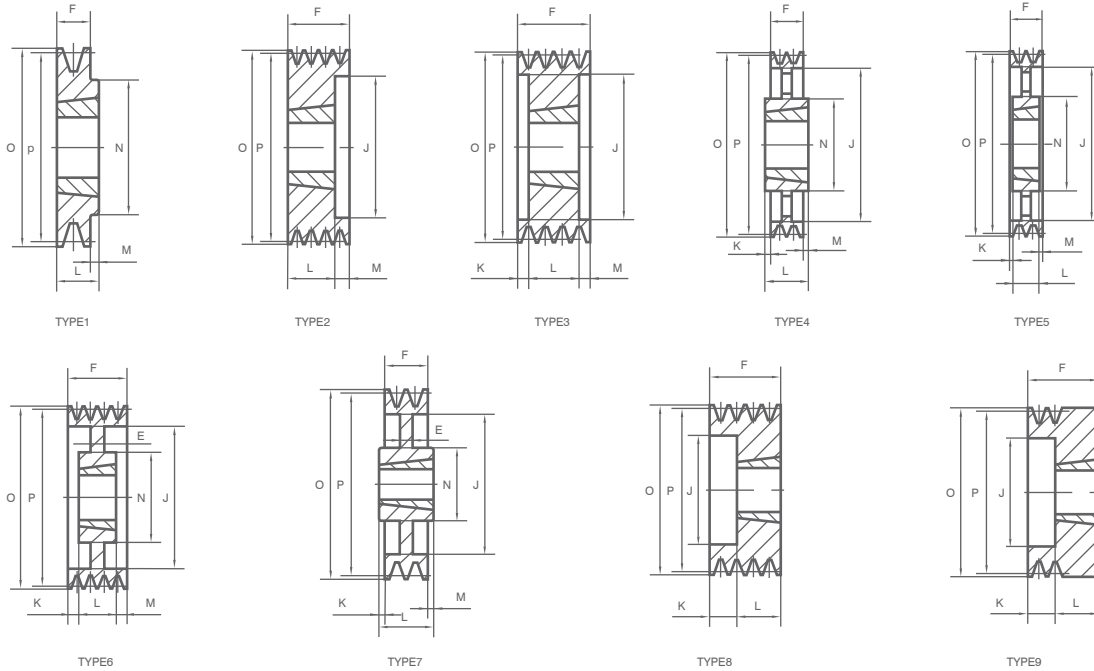

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
4SPCX200MM	4	200.0	209.6	3	3020	75	-	111	144	30	51	30	-
4SPCX212MM	4	212.0	221.6	3	3020	75	-	111	156	30	51	30	-
4SPCX224MM	4	224.0	233.6	3	3535	90	-	111	168	11	89	11	-
4SPCX236MM	4	236.0	245.6	3	3535	90	-	111	180	11	89	11	-
4SPCX250MM	4	250.0	259.6	3	3535	90	-	111	194	11	89	11	-
4SPCX265MM	4	265.0	274.6	3	3535	90	-	111	209	11	89	11	-
4SPCX280MM	4	280.0	289.6	3	3535	90	-	111	224	11	89	11	-
4SPCX300MM	4	300.0	309.6	6	3535	90	20	111	244	11	89	11	170
4SPCX315MM	4	315.0	324.6	6	3535	90	20	111	259	11	89	11	170
4SPCX335MM	4	335.0	344.6	6	3535	90	20	111	279	11	89	11	170
4SPCX355MM	4	355.0	365.0	6	3535	90	20	111	299	11	89	11	170
4SPCX375MM	4	375.0	384.6	6	3535	90	25	111	319	11	89	11	170
4SPCX400MM	4	400.0	409.6	5	3535	90	-	111	344	11	89	11	170
4SPCX425MM	4	425.0	434.6	5	3535	90	-	111	369	11	89	11	170
4SPCX450MM	4	450.0	459.6	5	3535	90	-	111	394	11	89	11	170
4SPCX475MM	4	475.0	484.6	5	3535	90	-	111	419	11	89	11	170
4SPCX500MM	4	500.0	509.6	5	3535	90	-	111	444	11	89	11	170
4SPCX530MM	4	530.0	539.6	5	3535	90	-	111	474	11	89	11	170
4SPCX560MM	4	560.0	569.6	5	4040	100	-	111	504	4.5	102	4.5	200
4SPCX630MM	4	630.0	639.6	4	4545	110	-	111	574	1.5	114	1.5	225
4SPCX800MM	4	800.0	809.6	4	5050	125	-	111	737	4	127	12	245
4SPCX1000MM	4	1000.0	1009.6	4	5050	125	-	111	937	1	127	12	245
4SPCX1250MM	4	1250.0	1259.6	4	5050	125	-	111	1187	4	127	12	245

Taper Bore V-pulleys


SPC-5

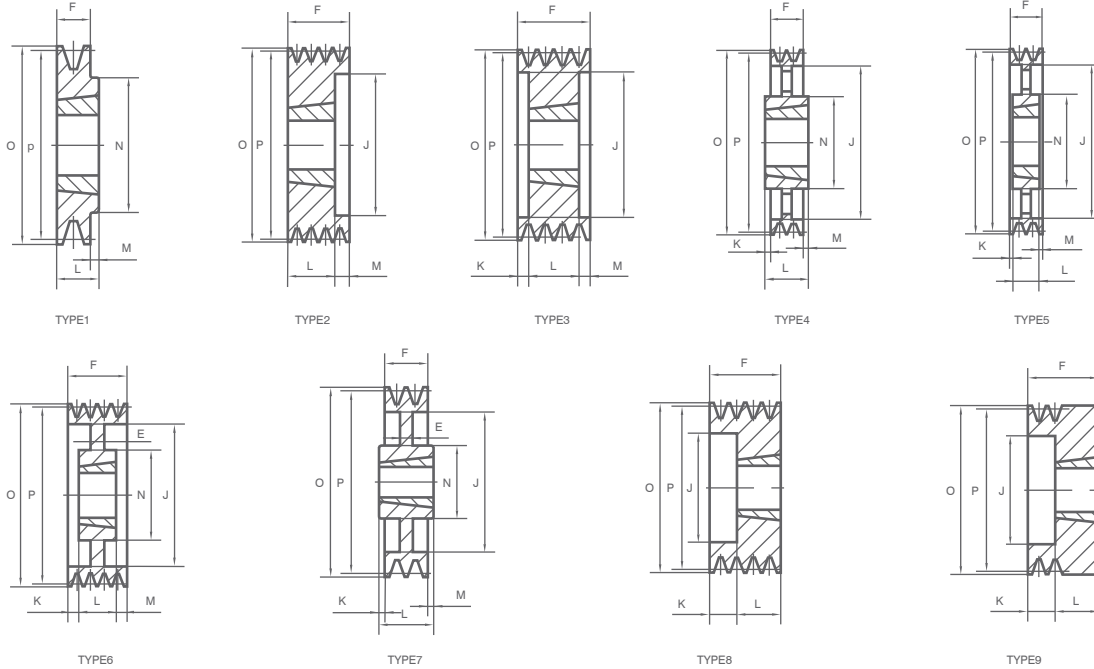

PART NO.	NO.OF GROOVES	R.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
5SPCX200MM	5	200.0	209.6	3	3535	90	-	136	150	23.5	89	23.5	-
5SPCX212MM	5	212.0	221.6	3	3535	90	-	136	160	23.5	89	23.5	-
5SPCX224MM	5	224.0	233.6	3	3535	90	-	136	173	23.5	89	23.5	-
5SPCX236MM	5	236.0	245.6	3	3535	90	-	136	185	23.5	89	23.5	-
5SPCX250MM	5	250.0	259.6	3	3535	90	-	136	198	23.5	89	23.5	-
5SPCX265MM	5	265.0	274.6	3	3535	90	-	136	213	23.5	89	23.5	-
5SPCX280MM	5	280.0	289.6	3	3535	90	-	136	228	23.5	89	23.5	-
5SPCX300MM	5	300.0	309.6	6	3535	90	20	136	247	23.5	89	23.5	170
5SPCX315MM	5	315.0	324.6	6	3535	90	20	136	264	23.5	89	23.5	170
5SPCX335MM	5	335.0	344.6	6	3535	90	20	136	280	23.5	89	23.5	170
5SPCX355MM	5	355.0	364.6	6	3535	90	20	136	304	23.5	89	23.5	170
5SPCX375MM	5	375.0	384.6	6	3535	90	20	136	324	23.5	89	23.5	170
5SPCX400MM	5	400.0	409.6	5	3535	90	-	136	344	23.5	89	23.5	170
5SPCX425MM	5	425.0	434.6	5	4040	100	-	136	369	17	102	17	200
5SPCX450MM	5	450.0	459.6	5	4040	100	-	136	394	17	102	17	200
5SPCX475MM	5	475.0	484.6	5	4040	100	-	136	419	17	102	17	200
5SPCX500MM	5	500.0	509.6	5	4040	100	-	136	444	17	102	14	200
5SPCX530MM	5	530.0	539.6	5	4040	100	-	136	474	17	102	17	200
5SPCX560MM	5	560.0	569.6	5	4545	110	-	136	504	11	114	11	225
5SPCX630MM	5	630.0	639.6	5	5050	125	-	136	574	4.5	127	4.5	245
5SPCX710MM	5	710.0	719.6	5	5050	125	-	136	654	4.5	127	4.5	245
5SPCX800MM	5	800.0	809.6	5	5050	125	-	136	737	4.5	127	4.5	245
5SPCX1000MM	5	1000.0	1009.6	5	5050	125	-	136	937	4.5	127	4.5	245
5SPCX1250MM	5	1250.0	1259.6	5	5050	125	-	136	1187	4.5	127	4.5	245
5SPCX1400MM	5	1400.0	1409.6	5	5050	125	-	136	1337	4.5	127	4.5	264
5SPCX1500MM	5	1500.0	1509.6	5	5050	125	-	136	1437	4.5	127	4.5	264

Taper B_{ore} V-pulleys


SPC-6

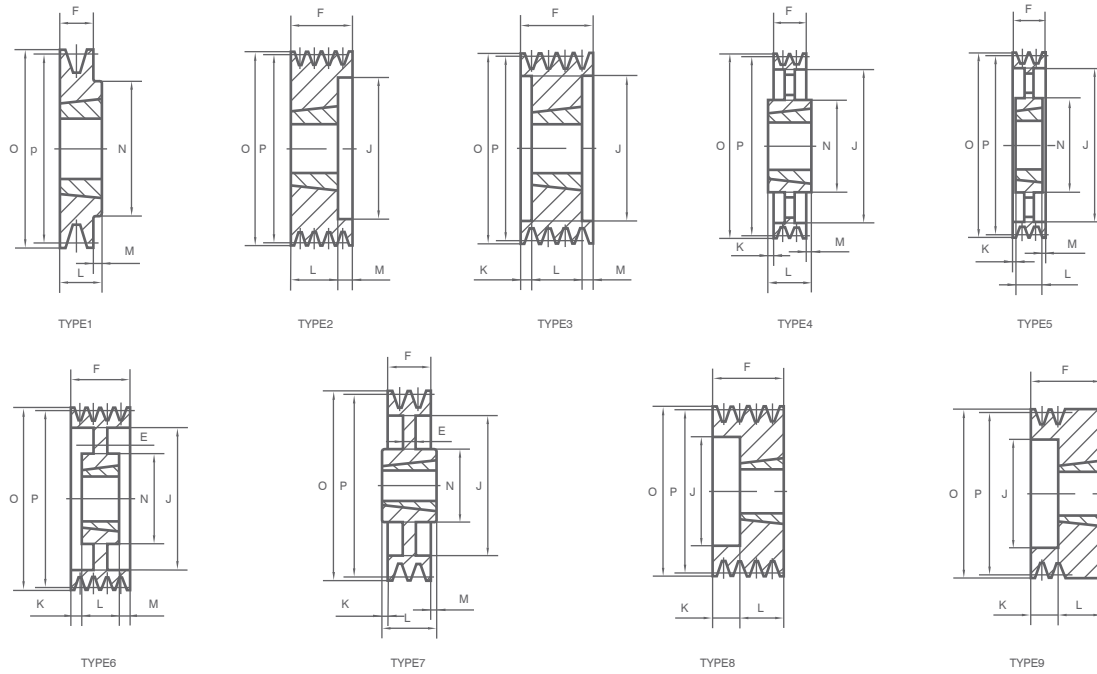

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
6SPCX200MM	6	200.0	209.6	3	3535	90	-	162	148	36.5	89	36.5	-
6SPCX212MM	6	212.0	221.6	3	3535	90	-	162	160	36.5	89	36.5	-
6SPCX224MM	6	224.0	233.6	3	3535	90	-	162	173	36.5	89	36.5	-
6SPCX236MM	6	236.0	245.6	3	3535	90	-	162	185	36.5	89	36.5	-
6SPCX250MM	6	250.0	259.6	3	3535	90	-	162	198	36.5	89	36.5	-
6SPCX265MM	6	265.0	274.6	3	3535	90	-	162	213	36.5	89	36.5	-
6SPCX280MM	6	280.0	289.6	3	3535	90	-	162	228	36.5	89	36.5	-
6SPCX300MM	6	300.0	309.6	6	3535	90	20	162	247	36.5	89	36.5	170
6SPCX315MM	6	315.0	324.6	6	3535	90	20	162	264	36.5	89	36.5	170
6SPCX335MM	6	335.0	344.6	6	3535	90	20	162	280	36.5	89	36.5	170
6SPCX355MM	6	355.0	364.6	6	3535	90	20	162	304	36.5	89	36.5	170
6SPCX375MM	6	375.0	384.6	6	4040	100	20	162	324	30	102	30	200
6SPCX400MM	6	400.0	409.6	6	4040	100	20	162	348	30	102	30	200
6SPCX425MM	6	425.0	434.6	6	4545	110	30	162	369	24	114	24	225
6SPCX450MM	6	450.0	459.6	6	4545	110	30	162	394	24	114	24	225
6SPCX475MM	6	475.0	484.6	6	4545	110	30	162	419	24	114	24	225
6SPCX500MM	6	500.0	509.6	5	4545	110	30	162	444	24	114	24	225
6SPCX530MM	6	530.0	539.6	5	4545	110	30	162	474	24	114	24	225
6SPCX560MM	6	560.0	569.6	5	5050	125	-	162	504	17.5	127	17.5	245
6SPCX630MM	6	630.0	639.6	5	5050	125	-	162	574	17.5	127	17.5	245
6SPCX710MM	6	710.0	719.6	5	5050	125	-	162	656	17.5	127	17.5	245
6SPCX800MM	6	800.0	809.6	5	5050	125	-	162	737	17.5	127	17.5	245
6SPCX1000MM	6	1000.0	1009.6	5	5050	125	-	162	937	17.5	127	17.5	245
6SPCX1250MM	6	1250.0	1259.6	5	5050	125	-	162	1187	17.5	127	17.5	245
6SPCX1400MM	6	1400.0	1409.6	5	5050	125	—	136	1337	17.5	127	17.5	264
6SPCX1500MM	6	1500.0	1509.6	5	5050	125	—	162	1437	17.5	127	17.5	264
6SPCX1600MM	6	1600.0	1609.6	5	6050	160	—	162	1533	17.5	127	17.5	337
6SPCX1750MM	6	1750.0	1759.6	5	6050	160	—	162	1683	17.5	127	17.5	337

Taper Bore V-pulleys


SPC-8

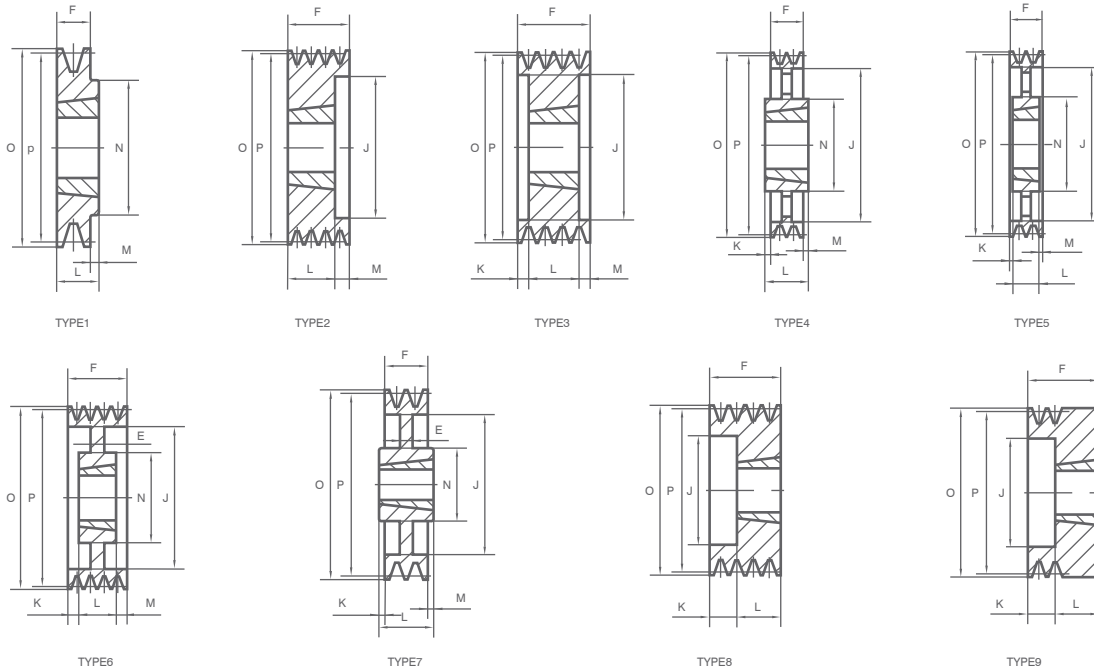

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
8SPCX200MM	8	200.0	209.6	3	3535	90	-	213	148	62	89	62	-
8SPCX212MM	8	212.0	221.6	3	3535	90	-	213	160	62	89	62	-
8SPCX224MM	8	224.0	233.6	3	3535	90	-	213	170	62	89	62	-
8SPCX236MM	8	236.0	245.6	3	3535	90	-	213	184	62	89	62	-
8SPCX250MM	8	250.0	259.6	3	3535	90	-	213	198	62	89	62	-
8SPCX265MM	8	265.0	274.6	3	3535	90	-	213	213	62	89	62	-
8SPCX280MM	8	280.0	289.6	3	3535	90	-	213	228	62	89	62	-
8SPCX300MM	8	300.0	309.6	3	4040	100	-	213	247	55.5	102	55.5	-
8SPCX315MM	8	315.0	324.6	3	4040	100	-	213	258	55.5	102	55.5	-
8SPCX335MM	8	335.0	344.6	6	4040	100	-	213	280	55.5	102	55.5	-
8SPCX355MM	8	355.0	364.6	3	4040	100	-	213	304	55.5	102	55.5	-
8SPCX375MM	8	375.0	384.6	3	4545	110	-	213	324	49.5	114	49.5	-
8SPCX400MM	8	400.0	409.6	6	4545	110	20	213	348	49.5	114	49.5	220
8SPCX425MM	8	425.0	434.6	6	5050	125	30	213	369	43	127	43	245
8SPCX450MM	8	450.0	459.6	6	5050	125	30	213	394	43	127	43	245
8SPCX475MM	8	475.0	484.6	6	5050	125	30	213	419	43	127	43	245
8SPCX500MM	8	500.0	509.6	6	5050	125	30	213	444	43	127	43	245
8SPCX530MM	8	530.0	539.6	6	5050	125	30	213	474	43	127	43	245
8SPCX560MM	8	560.0	569.6	5	5050	125	-	213	504	43	127	43	245
8SPCX630MM	8	630.0	639.6	5	5050	125	-	213	574	43	127	43	245
8SPCX710MM	8	710.0	719.6	5	5050	125	-	213	656	43	127	43	245
8SPCX800MM	8	800.0	809.6	5	5050	125	-	213	737	43	127	43	245
8SPCX930MM	8	930.0	939.6	5	5050	125	-	213	867	43	127	43	245
8SPCX1000MM	8	1000.0	1009.6	5	5050	125	-	213	937	43	127	43	245
8SPCX1250MM	8	1250.0	1259.6	5	5050	125	-	213	1187	43	127	43	245
8SPCX1400MM	8	1400.0	1409.6	5	6050	160	-	213	1337	43	127	43	337
8SPCX1500MM	8	1500.0	1509.6	5	6050	160	-	213	1437	43	127	43	337
8SPCX1600MM	8	1600.0	1609.6	5	6050	160	-	213	1537	43	127	43	337
8SPCX1750MM	8	1750.0	1759.6	5	6050	160	-	213	1683	43	127	43	337
8SPCX1800MM	8	1800.0	1809.6	5	7060	180	-	213	1737	30	153	30	375
8SPCX1900MM	8	1900.0	1909.6	5	7060	180	-	213	1833	30	153	30	375
8SPCX2000MM	8	2000.0	2009.6	5	8065	200	-	213	1937	24	165	24	394
8SPCX2500MM	8	2500.0	2509.6	5	120100	330	-	213	2437	20.5	254	20.5	584

Taper B_{ore} V-pulleys


SPC-10

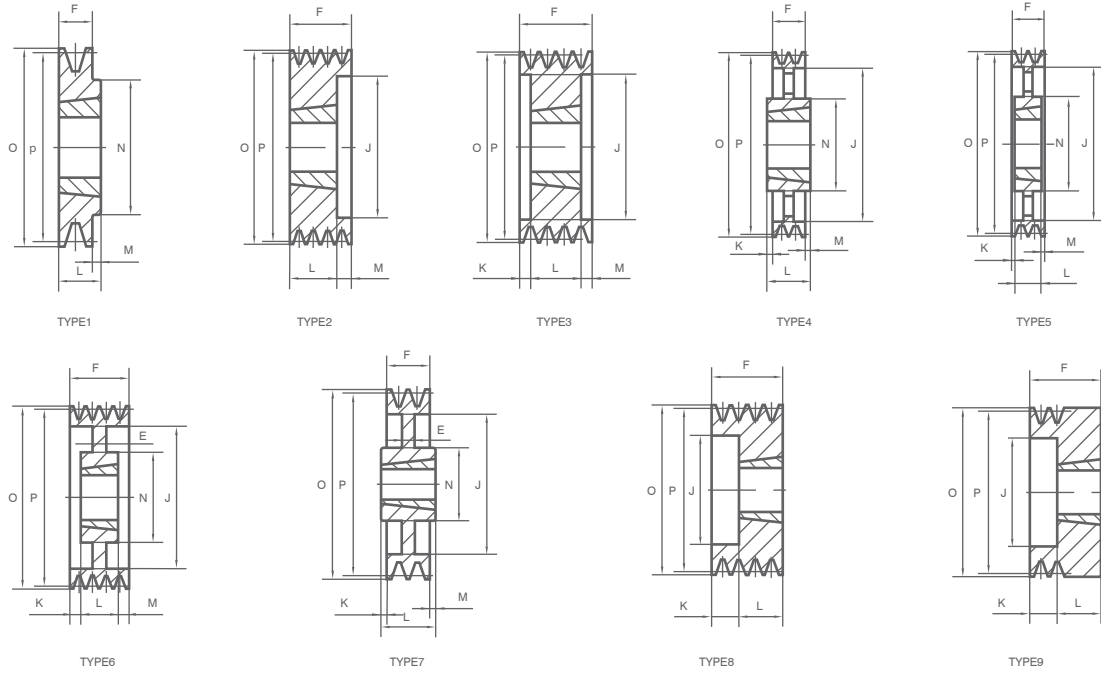

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
10SPCX224MM	10	224.0	233.6	3	3535	90	—	264	170	87.5	89	87.5	—
10SPCX250MM	10	250.0	259.6	3	4040	100	-	264	196	81	102	81	-
10SPCX265MM	10	265.0	274.6	3	4040	100	-	264	213	81	102	81	-
10SPCX280MM	10	280.0	289.6	3	4040	100	-	264	226	81	102	81	-
10SPCX300MM	10	300.0	309.6	3	4545	110	-	264	245	75	114	75	-
10SPCX315MM	10	315.0	324.6	3	4545	110	-	264	258	75	114	75	-
10SPCX335MM	10	335.0	344.6	3	4545	110	—	264	280	55.5	102	55.5	—
10SPCX355MM	10	355.0	364.6	3	4545	110	-	264	299	75	114	75	-
10SPCX375MM	10	375.0	384.6	3	4545	110	—	264	324	75	114	75	—
10SPCX400MM	10	400.0	409.6	3	5050	125	-	264	342	68.5	127	68.5	-
10SPCX425MM	10	425.0	434.6	6	5050	125	30	264	369	68.5	127	68.5	245
10SPCX450MM	10	450.0	459.6	6	5050	125	40	264	394	68.5	127	68.5	245
10SPCX475MM	10	475.0	484.6	6	5050	125	30	264	419	68.5	127	68.5	245
10SPCX500MM	10	500.0	509.6	6	5050	125	40	264	444	68.5	127	68.5	245
10SPCX530MM	10	530.0	539.6	6	5050	125	30	264	474	68.5	127	68.5	245
10SPCX560MM	10	560.0	569.6	5	5050	125	-	264	504	68.5	127	68.5	245
10SPCX630MM	10	630.0	639.6	5	5050	125	-	264	574	68.5	127	68.5	245
10SPCX710MM	10	710.0	719.6	5	5050	125	-	264	656	68.5	127	68.5	245
10SPCX800MM	10	800.0	809.6	5	5050	125	-	264	737	68.5	127	68.5	245
10SPCX1000MM	10	1000.0	1009.6	5	5050	125	-	264	937	68.5	127	68.5	245
10SPCX1250MM	10	1250.0	1259.6	5	5050	125	-	264	1187	68.5	127	68.5	245
10SPCX1400MM	10	1400.0	1409.6	5	6050	160	—	264	1337	68.5	127	68.5	337
10SPCX1500MM	10	1500.0	1509.6	5	6050	160	—	264	1437	68.5	127	68.5	337
10SPCX1600MM	10	1600.0	1609.6	5	6050	160	—	264	1537	68.5	127	68.5	337
10SPCX1750MM	10	1750.0	1759.6	5	7060	180	—	264	1683	55.5	153	55.5	375
10SPCX1800MM	10	1800.0	1809.6	5	7060	180	—	264	1737	55.5	153	55.5	375
10SPCX1900MM	10	1900.0	1909.6	5	7060	180	—	264	1833	55.5	153	55.5	375
10SPCX2000MM	10	2000.0	2009.6	5	10085	280	—	264	1937	24	216	24	489
10SPCX2500MM	10	2500.0	2509.6	5	120100	330	—	264	2437	5	254	5	584

Taper Bore V-pulleys


SPC-12

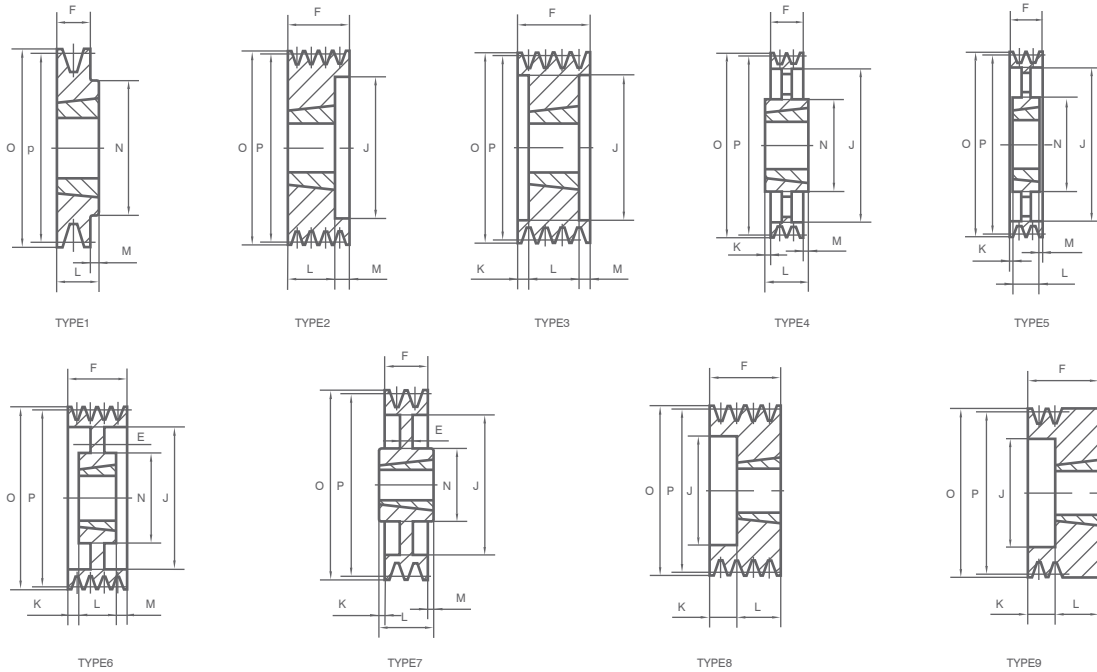


PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
12SPCX315MM	12	315.0	324.6	3	5050	125	—	315	258	94	127	94	—
12SPCX335MM	12	335.0	344.6	3	5050	125	—	315	280	100.5	114	100.5	—
12SPCX355MM	12	355.0	364.6	3	5050	125	—	315	299	100.5	114	100.5	—
12SPCX375MM	12	375.0	384.6	3	5050	125	—	315	324	94	127	94	—
12SPCX400MM	12	400.0	409.6	3	5050	125	—	315	342	94	127	94	—
12SPCX425MM	12	425.0	434.6	6	5050	125	30	315	369	94	127	94	236
12SPCX450MM	12	450.0	459.6	6	5050	125	30	315	394	94	127	94	236
12SPCX475MM	12	475.0	484.6	6	5050	125	30	315	419	94	127	94	236
12SPCX500MM	12	500.0	509.6	6	5050	125	30	315	444	94	127	94	236
12SPCX530MM	12	530.0	539.6	6	5050	125	30	315	474	94	127	94	236
12SPCX560MM	12	560.0	569.6	5	5050	125	—	315	504	94	127	94	236
12SPCX630MM	12	630.0	639.6	5	5050	125	—	315	574	94	127	94	236
12SPCX710MM	12	710.0	719.6	5	5050	125	—	315	656	94	127	94	236
12SPCX800MM	12	800.0	809.6	5	5050	125	—	315	737	94	127	94	236
12SPCX930MM	12	930.0	939.6	5	5050	125	—	315	867	94	127	94	236
12SPCX1000MM	12	1000.0	1009.6	5	5050	125	—	315	937	94	127	94	236
12SPCX1250MM	12	1250.0	1259.6	5	5050	125	—	315	1187	94	127	94	236
12SPCX1400MM	12	1400.0	1409.6	5	6050	160	—	315	1337	94	127	94	337
12SPCX1500MM	12	1500.0	1509.6	5	6050	160	—	315	1437	94	127	94	337
12SPCX1600MM	12	1600.0	1609.6	5	6050	160	—	315	1537	94	127	94	337
12SPCX1750MM	12	1750.0	1759.6	5	7060	180	—	315	1683	81	153	81	375
12SPCX1800MM	12	1800.0	1809.6	5	7060	180	—	315	1737	81	153	81	375
12SPCX1900MM	12	1900.0	1909.6	5	7060	180	—	315	1833	81	153	81	375
12SPCX2000MM	12	2000.0	2009.6	5	10085	280	—	315	1937	49.5	216	49.5	489
12SPCX2500MM	12	2500.0	2509.6	5	120100	330	—	315	2437	30.5	254	30.5	584

Taper B_{ore} V-pulleys


SPC-14 SPC-16/18




TYPE1




TYPE2




TYPE3




TYPE4




TYPE5




TYPE6



TYPE7



TYPE8



TYPE9

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
14SPCX1600MM	14	1600.0	1609.6	5	6050	160	—	366	1537	119.5	127	119.5	337
14SPCX1750MM	14	1750.0	1759.6	5	7060	180	—	366	1683	106.5	153	106.5	375
14SPCX1900MM	14	1900.0	1909.6	5	8065	200	—	366	1833	100.5	165	100.5	394
14SPCX2000MM	14	2000.0	2009.6	5	8065	200	—	366	1937	100.5	165	100.5	394
16SPCX1600MM	16	1600.0	1609.6	5	7060	180	—	417	1537	132	153	132	375
16SPCX1750MM	16	1750.0	1759.6	5	7060	180	—	417	1683	132	153	132	375
16SPCX1900MM	16	1900.0	1909.6	5	8065	200	—	417	1833	126	165	126	394
16SPCX2000MM	16	2000.0	2009.6	5	8065	200	—	417	1937	100.5	216	100.5	518
18SPCX2000MM	18	2000.0	2009.6	5	8065	200	—	468	1937	126	216	126	518