

## Rexroth Ball Rail Systems Standard Runner Blocks, Steel Version

### Runner Block 1622-

#### Slimline

#### Versions:


- Runner block without ball retainer:  
for part numbers, see table
- Runner block with ball retainer:  
part numbers 1622-...-22

#### Dynamic characteristics

Speed  $v_{\max} = 5 \text{ m/s}$

Acceleration  $a_{\max} = 500 \text{ m/s}^2$

Other technical data, see chapter "General Technical Data and Calculations".

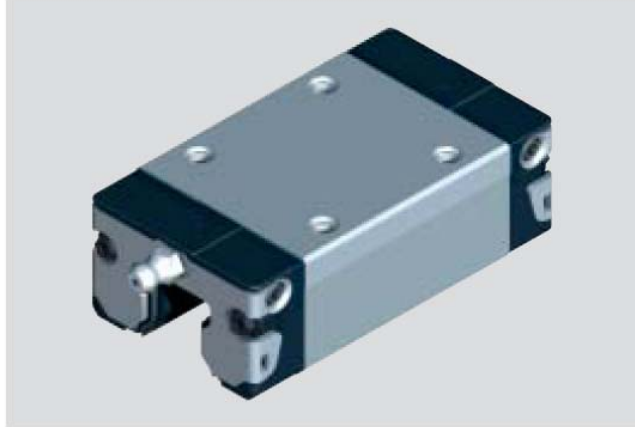

#### Part numbers

Size	Accuracy class	Part numbers for runner blocks for preload class			
		up to approx. 10 $\mu\text{m}$ clearance	Preload 0.02 C	Preload 0.08 C	Preload 0.13 C
15	P		1622-112-20	1622-122-20	1622-132-20
	H	1622-193-20	1622-113-20	1622-123-20	
	N	1622-194-20	1622-114-20	1622-124-20	
20	P		1622-812-20	1622-822-20	1622-832-20
	H	1622-893-20	1622-813-20	1622-823-20	
	N	1622-894-20	1622-814-20	1622-824-20	
25	P		1622-212-20	1622-222-20	1622-232-20
	H	1622-293-20	1622-213-20	1622-223-20	
	N	1622-294-20	1622-214-20	1622-224-20	
30	P		1622-712-20	1622-722-20	1622-732-20
	H	1622-793-20	1622-713-20	1622-723-20	
	N	1622-794-20	1622-714-20	1622-724-20	
35	P		1622-312-20	1622-322-20	1622-332-20
	H	1622-393-20	1622-313-20	1622-323-20	
	N	1622-394-20	1622-314-20	1622-324-20	
45*	P		1622-412-20	1622-422-20	1622-432-20
	H	1622-493-20	1622-413-20	1622-423-20	
	N	1622-494-20	1622-414-20	1622-424-20	


\* Under preparation

#### Note on dynamic load capacities and moments (see table)

Determination of dynamic load capacities and moments is based on a travel life of 100 000 m.

However, frequently this is determined on the basis of only 50 000 m.

In this case for comparison:  
multiply values  $C$ ,  $M_t$  and  $M_l$  by 1.26  
in accordance with Rexroth table.

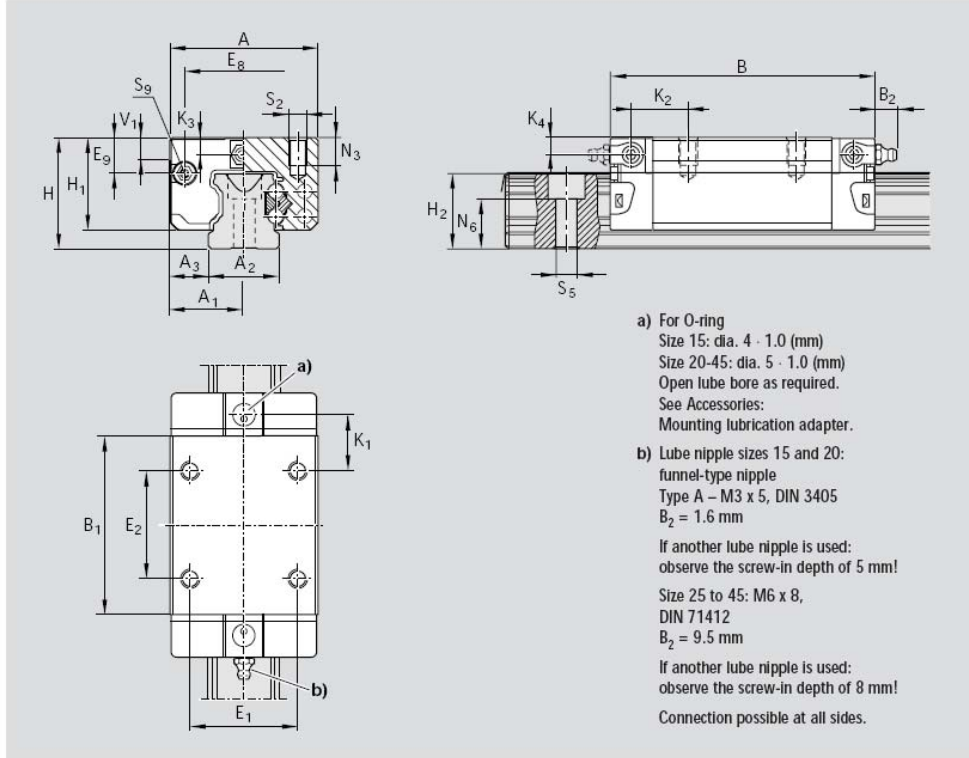

Size	Dimensions (mm)																		
	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	B	B <sub>1</sub>	H	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>	V <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>8</sub>	E <sub>9</sub>	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	34	17	15	9.5	58.2	39.2	24	19.90	16.30	16.20	5.0	26	26	24.55	6.70	10.00	11.60	3.20	3.20
20	44	22	20	12.0	75.0	49.6	30	25.35	20.75	20.55	6.0	32	36	32.50	7.30	13.80	13.80	3.35	3.35
25	48	24	23	12.5	86.2	57.8	36	29.90	24.45	24.25	7.5	35	35	38.30	11.50	17.45	18.60	5.50	5.50
30	60	30	28	16.0	97.7	67.4	42	35.35	28.55	28.35	7.0	40	40	48.40	14.60	20.00	21.70	6.05	6.05
35	70	35	34	18.0	110.5	77.0	48	40.40	32.15	31.85	8.0	50	50	58.00	17.35	20.50	22.00	6.90	6.90
45	86	43	45	20.5	137.6	97.0	60	50.30	40.15	39.85	10.0	60	60	69.80	20.90	27.30	29.30	8.20	8.20

<sup>1)</sup> Dimension H<sub>2</sub> with rail seal cover strip

<sup>2)</sup> Dimension H<sub>2</sub> without rail seal cover strip

Size	N <sub>3</sub>	Dimensions (mm)				Mass (kg)	Load capacities (N) <sup>3)</sup>		Moments (Nm)			
		N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	S <sub>5</sub>	S <sub>9</sub>		C dyn.	C <sub>0</sub> stat.	M <sub>t</sub> dyn.	M <sub>t0</sub> stat.	M <sub>L</sub> dyn.	M <sub>L0</sub> stat.
15	6.0	10.3	M4	4.4	M2.5-3.5 deep	0.15	7 800	13 500	74	130	40	71
20	7.5	13.2	M5	6.0	M3-5 deep	0.35	18 800	24 400	240	310	130	165
25	9.0	15.2	M6	7.0	M3-5 deep	0.50	22 800	30 400	320	430	180	240
30	12.0	17.0	M8	9.0	M3-5 deep	0.85	31 700	41 300	540	720	290	380
35	13.0	20.5	M8	9.0	M3-5 deep	1.25	41 900	54 000	890	1160	440	565
45	18.0	23.5	M10	14.0	M4-7 deep	2.40	68 100	85 700	1830	2310	890	1130

<sup>3)</sup> Load capacities for version without ball retainer. Load capacities for version without ball retainer, see Product Overview with Load Capacities.