


Company: _____
 Location: _____
 Submitted by: _____ Date: _____
 Quantity: _____

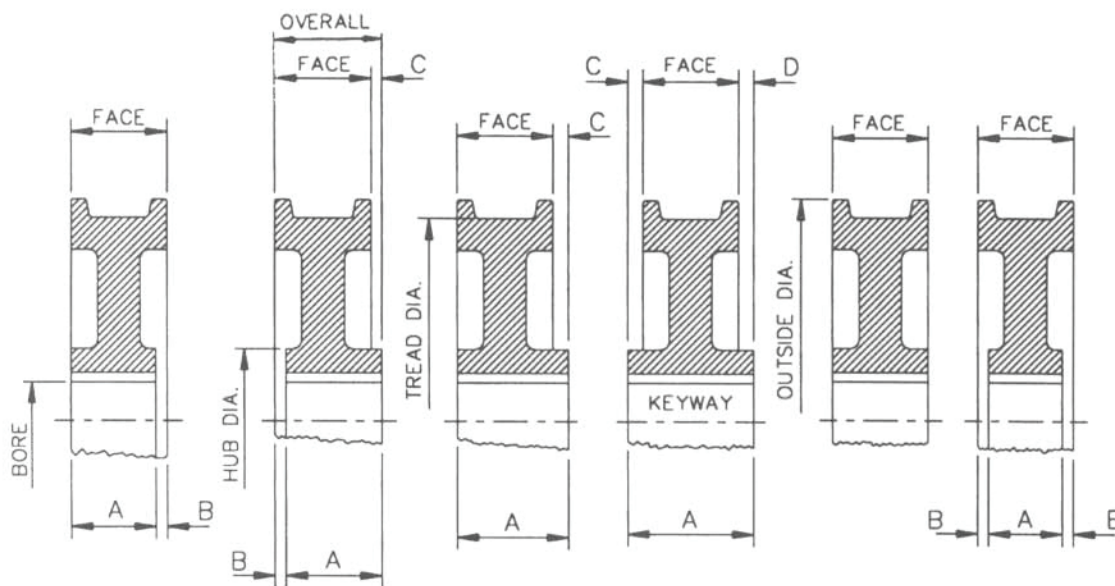

TYPE 1


TYPE 2

TYPE 3

TYPE 4

TYPE 5

TYPE 6

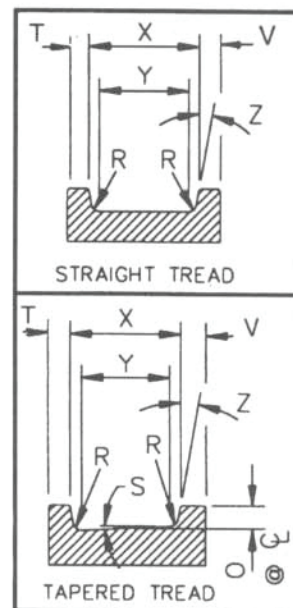

Type Wheel	Outside Diameter	Tread Diameter	Face	Bore	Keyway ¹	Hub Diameter	Overall	A	B

C	D	E	Rail Head Width or Rail Head Size ²	Type Tread ³	X	Y	Z	R

T	V	S	0	No. Wheels On Crane	Max Load Per Wheel	Length of Span	Bearing Type Bronze or Roller	Type of Service

- Specify if keyway is straight or tapered. If tapered, give location of deep end — and if tread is tapered, give direction of the keyway in relation to the taper of the tread.
- Specify pound rail used or width of rail head. Taper tread diameter is standard at center of tread.
- If tread is tapered, give direction of taper in relation to hub extensions. Standard is 1" in 25" (2°17').